

P O W E R
T O O L S



CHANGZHOU HANTECHN IMP.& EXP. CO., LTD.

Tel: +0086-51986984161
Office Mob: +0086-13921081290
Wechat: +0086-13921081290
Whatapp: +0086-13921081290
Skype: creator_mader
E-mail: simon@hantotools.com

Hantech[®]

2023

PRODUCT MANUAL

CONTENT

01	3.6V Multi Head Power Tools	01
02	12V Multi Head Power Tools	03
03	18V Multi Head Power Tools	05
04	18V Powerpro Series	11
05	20V Powerplus Intelligent Series	19
06	12V Battery Power Tools	25
07	18V Battery Power Tools	29
08	36V Battery Power Tools	83
09	58V Battery Power Tools	87
10	Electric Garden Machine	91
11	Gasoline Garden Machine	123
12	Electric Generator	149
13	Water Pump	155
14	Multi-function Tractor	161
15	Power Tools Accessories	169

3.6V MULTI HEAD POWER TOOLS

In a set or separately the right adapter for every task. In addition, we are continuing to develop and create new new adaptors .

3.6V Cordless Screwdriver Adapters

1A0001	
Voltage	3.6V
Battery	1500mAh Li-Ion
No Load Speed	200rpm
Chuck	1/4"chuck
Max. Torque	5N.M
Charging port	USB Type C



12V

MULTI HEAD
POWER TOOLS

Compact design, portable to carry everywhere with comfortable and antislip soft grip for women
there is no cumbersome annoying weight during use.
One product with multi-functions which include belt sander smal blower and convertible chain saw.



1B0001	
Battery	12V
No load speed	4000rpm
Motor	BL3820
Guide Bar Length	3.5"=88.9mm
Link Chain	020.043.28
Sprocket	020 sprocket
7 Tooth Line Speed	4.8m/s
Max Cutting Capacity	round woods70mm
Packing Size	375*88*170mm

12V

Multi-function
Combination Tool

18V MULTI HEAD POWER TOOLS

This machine adopts a brushless motor with a long service life. One body is matched with various functional heads to meet various scenarios in daily life and work. The power supply adopts rechargeable batteries, without the problem of entanglement of wires, and is not limited by the environment.

18V MULTI HEAD POWER TOOLS

- Brushless multi-purpose
- One button repalcement
- High queliy fuselage



1C0001	
Voltage	18V
Weight	6KG-8KG
Dril type	Cordless drill
Power source	Battery
Motor type	Brushless motor
Max drilling diameter	other, 20mm



1C0001a

Charging Conversion Head	
Digital display power	
3type LED light	
2type warning	
USB:1A/2A	



1C0001c

Impact Bit	
Maximum chuck diameter	10mm
Maximum torque	32N.m
No-load speed	
High speed	0-1450r/min
Low speed	0-400r/min
Impacting frequency	0-21000ipm



1C0001e

Dual-purpose Wrench Head	
Maximum chuck diameter	1/4(6.35mm)+1/2(12.7mm)
Maximum torque	300N.m
No-load speed	0-2800r/min
Impacting frequency	0-3200ipm



1C0001g

Grinding head	
No-load speed	0-10000r/min
Plate size	94X135mm



1C0001i

Sabre saw head	
Cutting stroke	15mm
Reciprocating frequency	0-300r/min



1C0001b

Two-speed Electric Drill	
Maximum chuck diameter	10mm
Maximum torque	32N.m
No-load speed	
High speed	0-1450r/min
Low speed	0-400r/min
Impacting frequency	0-21000ipm



1C0001d

Screwdriver Head	
Maximum chuck diameter	
Maximum torque	
No-load speed	1/4(6.35mm)
Impacting frequency	180N.m
	0-3300r/min
	0-3600ipm



1C0001f

Universal head	
Oscillating frequency	0-21000ipm
Oscillating angle	3°



1C0001h

Curved saw head	
Cutting stroke	12.7mm
Reciprocating frequency	0-2700r/min



1C0001j

Brushless Scissors	
Rated Voltage	21V
No-load speed	0-1600r/min
Maximum torque	125N.m
Cutting thickness	0.01-1.5mm



1C0001k

4-inch Chain Saw Head	
Guide bar	10mm
Maximum speed	7m/s
No-load speed	4000r/min



1C0001m

Dryer Head	
No-load speed	0-24000r/min
Air output	2.8m³/min



1C0001o

Hammer Head	
No-load speed	0-2000r/min
Impact frequency	0-5500bpm
Impact energy	1.7J
Chuck way	SDS



1C0001q

Pump Head	
No-load speed	0-3300r/min
Pressure limit	0-6.9BAR(0-7kg/m²)



1C0001s

Electric circular saw head	
No-load speed	0-4000r/min
Maximum saw blade size	100mm/125mm
Cutting chip aperture	20mm
Maximum cutting depth	(90°41mm)(45°30mm)



1C0001l

Cleaning Water Gun Head	
Flow	2.4L/min
Rated pressure	1.8/3.0Mpa



1C0001n

Angle Grinder Head	
No-load speed	8000r/min
Cutting chip aperture	16mm/22mm
Cutting blade diameter	100mm/125mm



1C0001p

Hedge Machine Head	
No-load speed	1200r/min
Grass clippings width	80mm
Length of the purning	160mm




1C0001r

Trimming Head	
No-load speed	11000r/min
Clip card size	6mm

12V

Cordless
Dual-function
Saw

The Angle of the saw head can be adjusted to meet the needs of different scenarios.

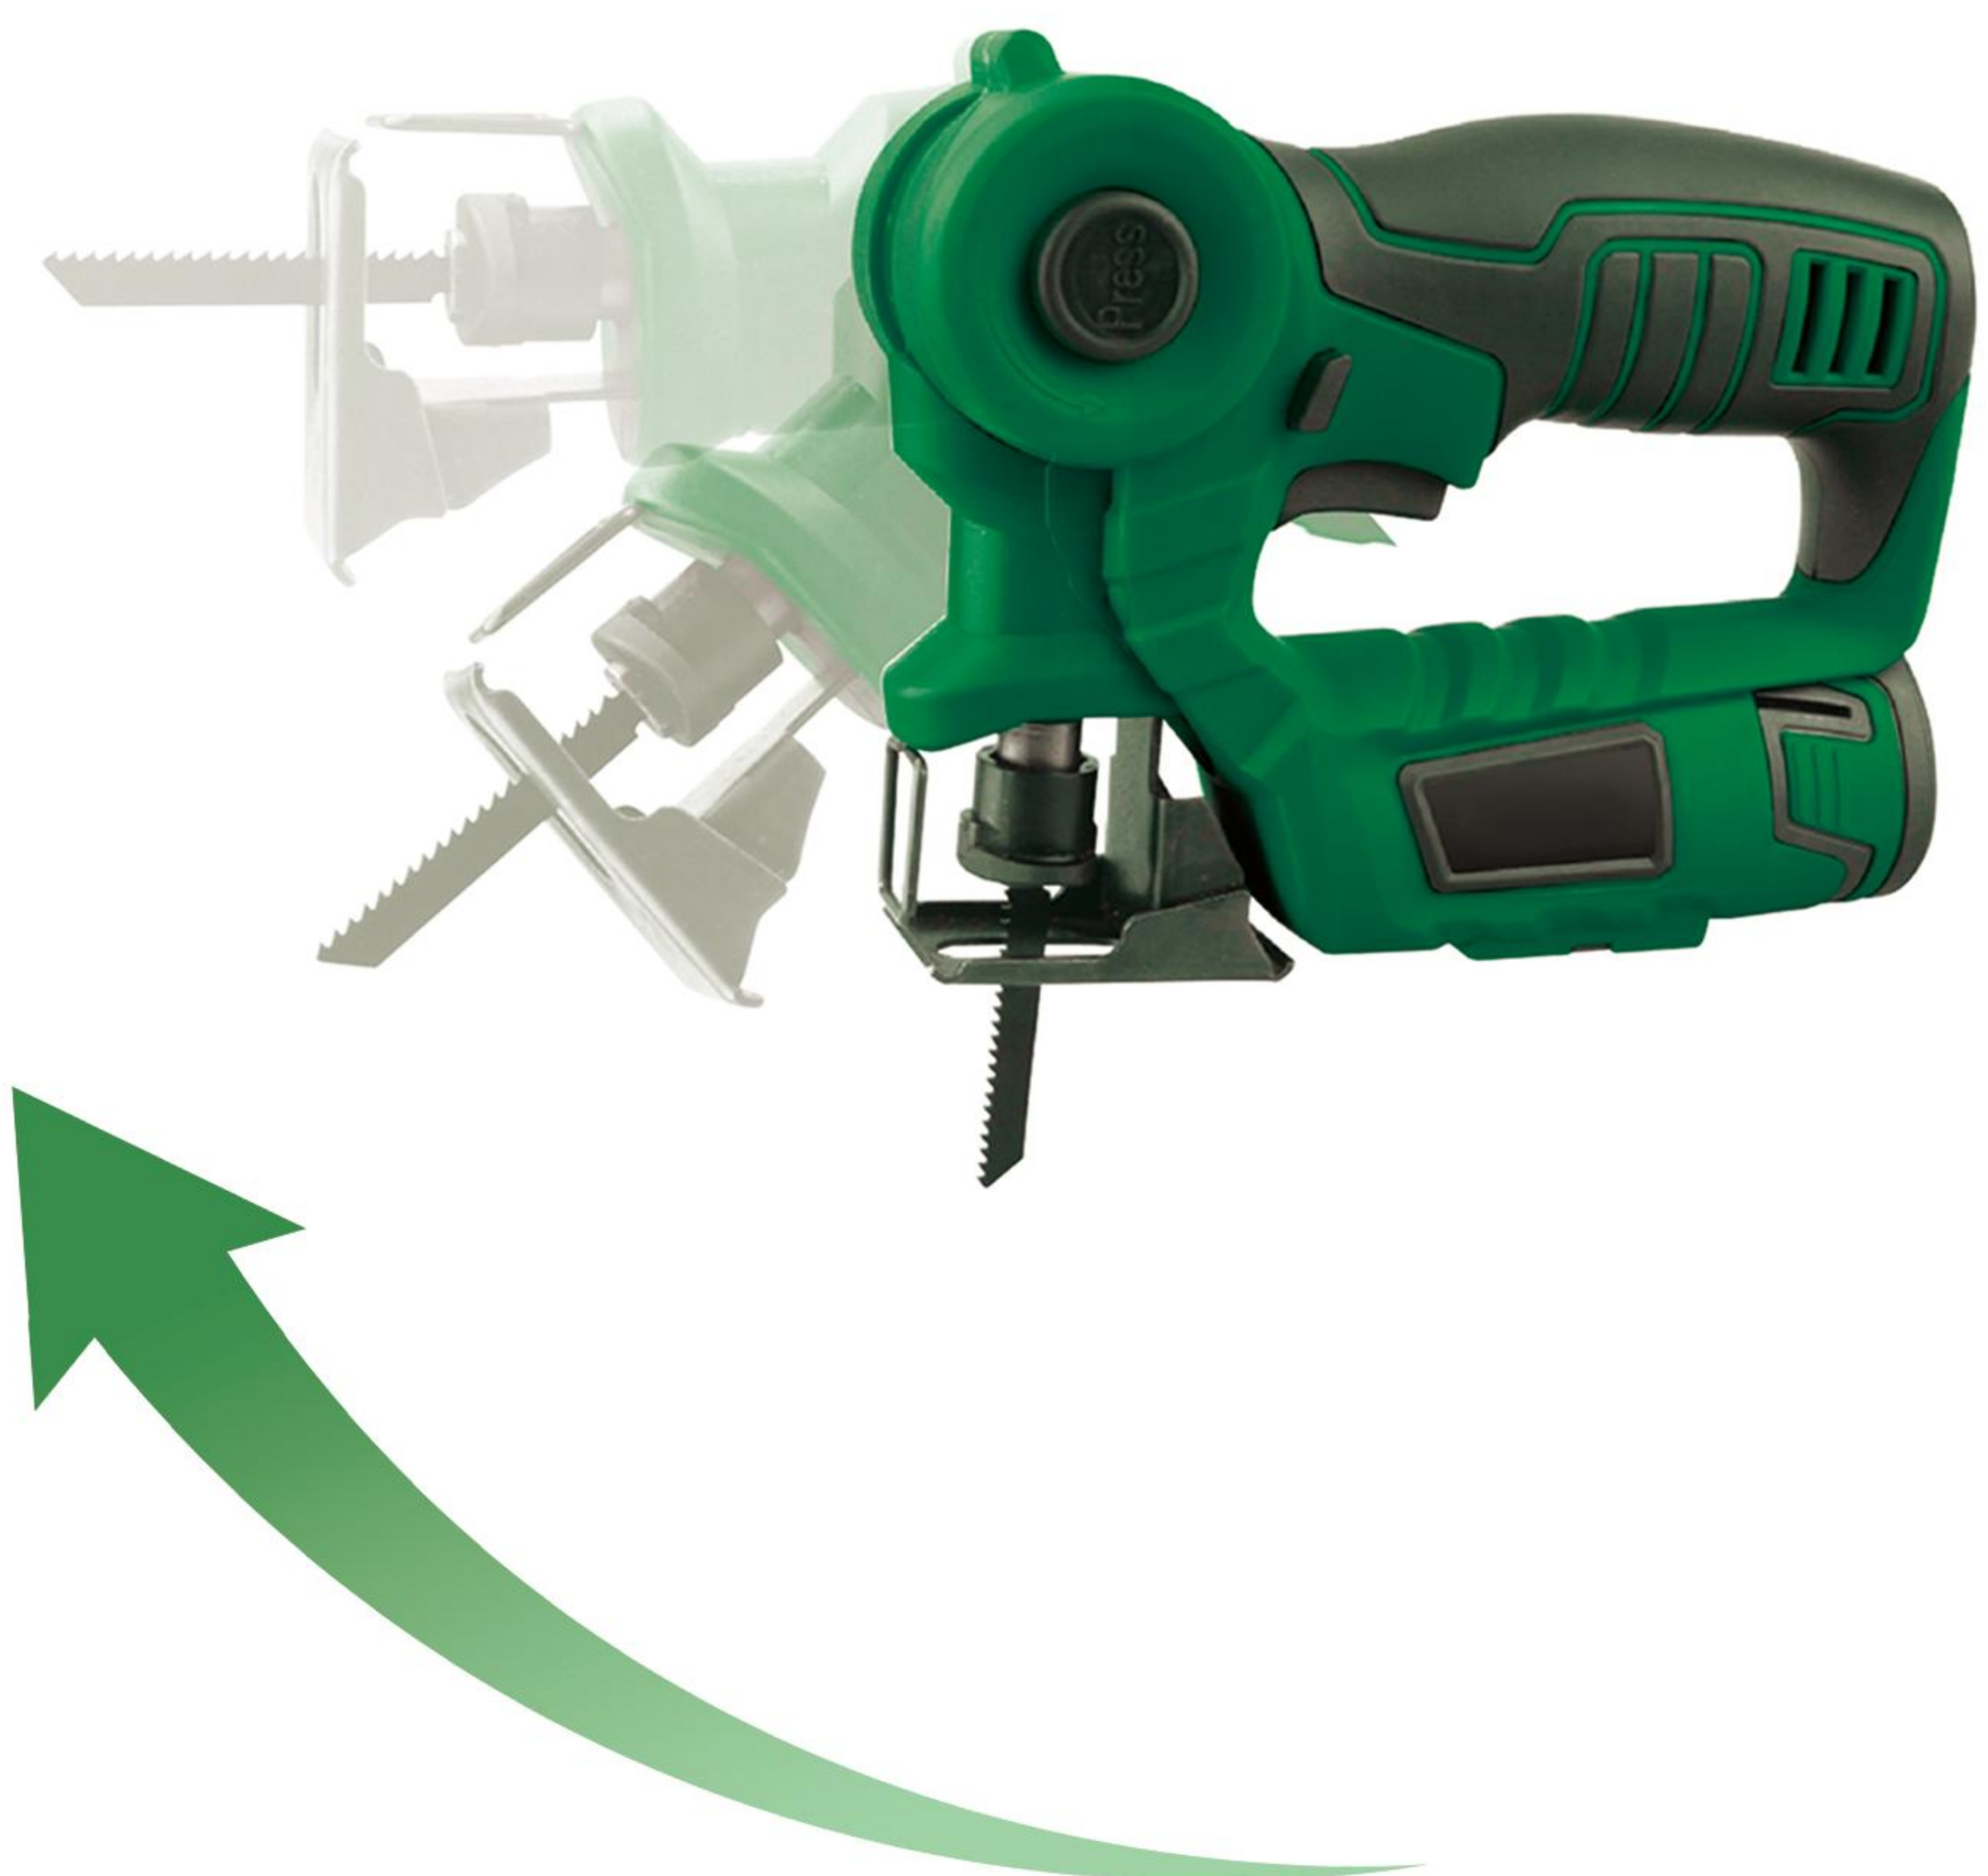

1B0002	
Voltage	12V
Battery	1500mAh Li-Ion
No Load Speed	200rpm
Chuck	1/4"chuck
Max. Torque	5N.M
Charging port	USB Type C

18V

Cordless
Dual-function
Saw



1C0002	
Voltage	18V
No load speed	0-3000rpm
Stroke length	20mm
Cutting angle	0°to 90°
Max. cutting	Jig saw: Wood:50mm Metal:4mm
	Rep.saw: Wood:100mm Metal:50mm

18V POWERPRO SERIES



18V

POWERPRO
SERIES



2C0001
BRUSHLESS IMPACT WRENCH

Forward and reverse Switch
4820# Brushless motor
LED work light

No load speed 0-1800/2400r/min

Rated impact rate 0-2600/3300bpm

Drive Size 1/2"square head spindle

Max.torque 500N.m

/ /



2C0002
BRUSHLESS DRILL

12V Li-ion battery, 2 gear speed.
Forward and reverse running
10mm normal keyless chuck

No load speed 0-400/0-1450rpm

Torque settings 20+1

Motor 4215 brushless motor

Max.torque 30N.m

/ /



2C0003
BRUSHLESS DRILL

20V Li-ion battery, 2 gear speed.
Forward and reverse running
10mm normal keyless chuck

No load speed 0-400/0-1450rpm

Torque settings 20+1

Motor 4215 brushless motor

Max.torque 35N.m

/ /



2C0004
CORDLESS SCREWDRIVER

Battery 1.5Ah

Motor S380

No load speed 2000Rpm

Max torque 5N.M

Chuck size 6.35mm Magnetic chuck

LED worklight Yes

/ /

18V

POWERPRO
SERIES



2C0005
CORDLESS CIRCULAR SAW

20V Li-ion battery	
No load speed	0-6500rpm
Motor	6030# brushless motor
Cutting Depth	Cutting Depth:90° 52mm
Cutting Depth	45° 46mm
Output shaft	22mm
Dia of Saw	140mm
/	/



2C0007
BRUSHLESS ANGLE GRINDER

20V Li-ion battery 4235# Brushless motor	
No load speed	0-8500 RPM
Output Shaft	M10 M14
Disc Diameter	115mm 125mm



2C0006
BRUSHLESS HAMMER

20V Li-ion battery 3 Functions	
No load speed	0-1100rpm
Max percussion rate	0-4800Bpm
Impact power	2.2J
Motor	4825# Brushless motor
Max drilling capacity	13mm Metal / 30mm wood / 22mm concrete



2C0008
BRUSHLESS HAMMER

20V Li-ion battery 2 Functions	
No load speed	0-1100rpm
Max percussion rate	0-4400Bpm
Impact power	5J
Motor	5230# Brushless motor
Max drilling capacity	13mm Metal / 30mm wood / 22mm concrete

18V

POWERPRO
SERIES



2C0009
BRUSHLESS PRUNER SHEARS

36V CORDLESS PRUNER SHEARS 1pc 4000mAh battery, 1pc Cloth Bag 1pc Fast big Charger, BMC Packing	
Voltage	36V
Max Cutting	30mm
Gears	3 Mechanical
Motor	3349# Brushless Motor
/	/



2C0011
BRUSHLESS PRUNER SHEARS

16V Li-ion battery 2 speed The controller has independent switch	
Switch	Aluminum
Max cutting	18mm / 25mm
Material	SK5
Motor	3150#
/	/



2C0010
BRUSHLESS PRUNER SHEARS

20V Li-ion battery 2 speed The controller has independent switch	
Max cutting	20mm / 30mm
Material	SK5
Motor	3163#



2C0012
BRUSHLESS PRUNER SHEARS

20V Li-ion battery The controller has independent switch	
Max cutting	20mm / 35mm
Material	SK5
Motor	3163#

18V

POWERPRO
SERIES



2C0013
CORDLESS CHAIN SAW

20V Li-ion Battery	
Cutting Depth	0-400mm
Guide bar	16 inch
Guide bar material	spring steel
Chain pitch	3/8 inch
Number of chains joints	59
Speed of chain	12m/s
/	/



2C0014
CORDLESS CHAIN SAW

20V Li-ion Battery	
Cutting Depth	0-250mm
Guide bar	10 inch
Guide bar material	spring steel
Chain pitch	40 inch
Number of chains joints	59
Speed of chain	10m/s
/	/



18V

POWERPRO
SERIES



20V

POWERPLUS INTELLIGENT SERIES

20V

POWERPLUS
INTELLIGENT SERIES



INTELLIGENCE ERA



EQUIPPED WITH LITHIUM BATTERY
INTELLIGENT VOICE
AND POWERFUL MOTOR

20V

POWERPLUS
INTELLIGENT SERIES

LASER RANGING DOTTING



Electric Hammer 3C0001

Voltage	20v
No-load Speed	0-1400r/min
Impacting Frequency	0-4500BPM
Impact Energy	1.7J
Maximum Drilling Capacity	rolled steel 13mm/wood 28mm/beton 22mm
Optimum Borehole Range	6mm-12mm
Chuck Device	SDS
Best Range of Laser Ranging	0-20m



Screwdriver 3C0002

Voltage	20v
No-load Speed	0-1400rpm/0-2300rpm
Maximum Torque	200N.m
Output Shaft	1/4"Inner hexagon
Impacting Frequency	0-3500IPM



20V

POWERPLUS
INTELLIGENT SERIES



Circular Saw 3C0003

Voltage	20v
No-load Speed	6000r/min
Saw Blade Diameter	125mm
Diameter of Bore	20mm
Maximum Saw Depth	42.5mm
Bevel Angle	0-45°
Main Shaft Thread	M6



Long Handle Electric Mill 3C0005

Voltage	20v
No-load Speed	9500/16000/22000r/min
Maximum Diameter of Grinding Head	25mm
Gripper Diameter	6mm



Angle Grinder 3C0004

Voltage	20v
No-load Speed	3500/6000/8500r/min
Grinding Wheel Aperture	16mm
Grinding Wheel Diameter	100mm
Main Shaft Thread	M10



Short Handle Electric Mill 3C0006

Voltage	20v
No-load Speed	9500/16000/22000r/min
Maximum Diameter of Grinding Head	25mm
Gripper Diameter	0.6-6mm



Electrical Wrench 3C0007

Voltage	20v
No-load Speed	0-1400rpm/0-2300rpm
Maximum Torque	350N.m
Output Shaft	1/2"square toes 1/4"Inner hexagon
Impacting Frequency	0-3500IPM

12V BATTERY POWER TOOLS

The entire series of machine battery packs are universal, with a simple and elegant design, high quality, and multiple body options to meet the needs of different work scenarios.

12V

BATTERY POWER TOOLS



12V
BATTERY
POWER TOOLS



2B0001
CORDLESS DRILL

Voltage	12V
Motor	550#
No-load speed	0-400RPM / 0-1300RPM
Impact Rate	0-6000BPM / 0-19500BPM
Torque Setting	21+1
Chuck Size	0.8-10mm plastic
Torque	35NM
Wood ; Metal ; Concrete	Φ20mm,Φ8mms,Φ6mm
/	/



2B0003
CORDLESS IMPACT DRILL

Voltage	12V
Motor	550#
No-load speed	0-400RPM / 0-1300RPM
Impact Rate	0-6000BPM / 0-19500BPM
Torque Setting	21+1+1
Chuck Size	0.8-10mm plastic
Wood ; Metal ; Concrete	Φ20mm,Φ8mms,Φ6mm



2B0002
CORDLESS DRILL

Voltage	12 V
Motor	BL Motor
No-load speed	0-400RPM / 0-1300RPM
Impact Rate	0-6000BPM / 0-19500BPM
Torque Setting	21+1
Chuck Size	0.8-10mm plastic
Torque	32NM
Wood ; Metal ; Concrete	Φ20mm,Φ8mms,Φ6mm
/	/



2B0004
CORDLESS WRENCH

Voltage	12V
Motor	BL Motor
No-Load Speed	0-2400rpm
Torque	120N.m
Chuck size	1/4"
Impact Frequency	0-3400bpm
/	/

12V
BATTERY
POWER TOOLS



2B0005
CORDLESS SCREWDRIVER

Voltage	12V
Motor	550#
No-load speed	0-2700rpm
Torque	120N.m
Chuck size	3 / 8"
Impact Frequency	0-3800bpm
/	/



2B0007
CORDLESS SCREWDRIVER

Voltage	12 V
Motor	540 #
No-load speed	300RPM
Torque	45N.m
Chuck size	3/8"



2B0006
CORDLESS WRENCH

Voltage	12V
Motor	550#
No-load speed	0-2700rpm
Torque	120N.m
Chuck size	1/4"
Impact Frequency	0-3800bpm
/	/



2B0008
CORDLESS POLISHER

Voltage	12V
Motor	550#
No-Load Speed	0-2600/0-7800rpm
Torgue	80N.m
Polisher Diameter	Φ75mm

12V

BATTERY
POWER TOOLS



2B0009
MULTI GRINDER

Voltage	12V
Motor	395#
Variable Speed	1-6-max
No-Load Speed	5000-25000RPM
Chuck Size	Φ3.2mm



2B0010
CORDLESS RATCHET WRENCH

Voltage	12V
Motor	540#
No-load speed	300RPM
Torgue	45N.m
Chuck Size	3/8



2B0011
CORDLESS RATCHET WRENCH

Voltage	12 V
Motor	BL Motor
No-load speed	300RPM
Torgue	80N.m
Chuck Size	3/8



2B0012
CORDLESS MULTIFUNCTION TOOL

Voltage	12V
Motor	550#
No-Load Speed	5000-18000rpm
Swipping Angle	3.2°
/	/

12V

BATTERY
POWER TOOLS



2B0013
CORDLESS HAMMER

Voltage	12V
Motor	650#
No-Load Speed	0-1100rpm
Impact Rate	0-6000bpm
Power	1J
2 Function	drill/hammer
Wood,Metal;Concreted	Φ25mm , Φ10mm , Φ8mm



2B0015
CORDLESS RECIPROCATING SAW

Voltage	12V
Motor	550#
No-load speed	0-2700RPM
Forward and back distance	20mm
Blade Size	15cm
Max Branch Dia	Φ65mm
/	/



2B0014
CORDLESS JIG SAW

Voltage	12 V
Motor	650 #
No-load speed	1500-2800RPM
Working Distance	18mm
Working Angle Range	0°-45°
Wood / alu / alloy	50 / 3 / 3mm
/	/



2B0016
CORDLESS MULTIFUNCTION TOOL

Voltage	12V
Motor	750#
No-Load Speed	1450rpm
Cutting Saw Size	Φ85*Φ15*1mm
Cutting Depth	26.5mm in 90° / 17.0mm in 45°

12V

BATTERY
POWER TOOLS



2B0017
CORDLESS GARDEN SHEAR

Voltage	12V
Motor	550#
No-Load Speed	1300rpm
Shear Blade Width	70mm
Trimmer Blade Length	180mm



2B0019
CORDLESS ANGLE GRINDER

Voltage	12V
Motor	735#
No-load speed	12000-19500RPM
Cutting Saw Size	Φ76*1mm
/	/



2B0018
CORDLESS SANDER

Voltage	12 V
Motor	395 #
No-load speed	13000RPM
Sandingpaper Size	Φ80*Φ80*1mm
/	/



2B0020
CORDLESS LED LIGHT

Voltage	12V
Lumin	300lm
Max Power	3W



12V

BATTERY
POWER TOOLS

2B0021

Cell Capacity	1300 / 2000MA
Battery Capacity	1300 / 2000MA
Cell Qty	3pcs

2B0022

Cell Capacity	2000MA
Battery Capacity	4000MA
Cell Qty	6pcs

2B0023

Input	220-240V~, 50 / 60HZ, 50W
Output	12V DC, 2400MA
VDE plug with 1.8m powercord	

2B0024

Input	220-240V~, 50 / 60HZ, 65W
Output	12V DC, 2400MA
VDE plug with 1.8m powercord	

2B0025

Input	220-240V~, 50 / 60HZ, 0.3A
Output	14.4V DC, 2400MA
DC Head Size	Φ6.5mm
VDE plug with 1.8m powercord	
/	



18V BATTERY POWER TOOLS

18V

BATTERY POWER TOOLS



110+

CORDLESS
DRILL



4C0001	
Battery Voltage/Capacity	18V
Max. Chuck Diameter	13mm
Max. Torque	70N.m
No-Load Speed	H0-2000rpm / L0-400rpm
Charge Time	1h
Max. Drill-ΦIn Wood	38mm
Max. Drill-ΦIn Steel	13mm
Torque Settings	18±1
Net Weight	1.8kg



4C0002	
Battery Voltage/Capacity	18V
Max. Chuck Diameter	10mm
Max. Torque	35N.m
No-Load Speed	H0-1500rpm / L0-480rpm
Charge Time	1h
Max. Drill-ΦIn Wood	35mm
Max. Drill-ΦIn Steel	10mm
Torque Settings	18±1
Net Weight	1.08kg



4C0003	
Battery Voltage/Capacity	18V
Max. Chuck Diameter	10mm
Max. Torque	45N.m
No-Load Speed	H0-1350rpm / L0-350rpm
Charge Time	1h
Max. Drill-ΦIn Wood	21mm
Max. Drill-ΦIn Steel	10mm
Torque Settings	18±1
Net Weight	1.10kg



4C0004	
Battery Voltage/Capacity	18V
Max. Chuck Diameter	13mm
Max. Torque	25N.m
No-Load Speed	H0-2000rpm / L0-400rpm
Charge Time	1h
Max. Drill- ΦIn Wood	38mm
Max. Drill- ΦIn Steel	13mm
Torque Settings	18±1
Net Weight	1.8kg

LITHIUM
HAMMER



	4C0005	4C0006	4C0007	4C0008
Battery Voltage	18V	18V	18V	18V
Drilling Diameter	26mm	26mm	26mm	26mm
No-Load Speed	1200rpm	1200rpm	1200rpm	1400rpm
Impact Frequency	0-4500rpm	0-4800rpm	0-5000rpm	0-5200rpm
Charging Time	2-3hours	2-3hours	2-3hours	2-3hours

4C0009	
Battery Voltage	DC18V
Impact Rate At Rated Speed	0-5500bpm
Rated Speed	0-850rpm
Max. Impact Energy	1.3J
Max. Drill Dia. in Steel	10mm
Max. Drill Dia.in Concrete	13mm
Max. Drill Dia. in Wood	16mm
Toolholder	SDS-Plus



LITHIUM
WRENCH



4C0010

Rated Voltage	18V
Battery Capacity	2.6Ah/3.0Ah/4.0Ah
No Load Speed	2300/min
Rate Torque	250/N.m
Impact Frequency	2900/pm



4C0011

Rated Voltage	18V
Battery Capacity	2.6Ah/3.0Ah/4.0Ah
No Load Speed	2300/min
Rate Torque	350/N.m
Impact Frequency	2900/pm



4C0012

Rated Voltage	18V
Battery Capacity	2.6Ah/3.0Ah/4.0Ah
No Load Speed	0-350 0-1350/min
Rate Torque	54/N.m
Impact Frequency	13mm



4C0013

Rated Voltage	18V
Battery Capacity	2.6Ah/3.0Ah/4.0Ah
No Load Speed	0-350 0-1350/min
Rate Torque	450/N.m
Impact Frequency	2900/pm

SCREWDRIVER



4C0014

Battery Voltage/Capacity	18V
Max.Torque	280N.m
No-load Speed	0-2800rpm
Max.Impact Rate	0-3300ipm
Charge Time	1.5h
Square Drive Screw	12.7mm
Standard Bolt	M10~M20
High Strength Bolt	M10~M16
Net.Weight	1.56kg

Brushless Motor



ANGLE GRINDER



	4C0015	4C0016	4C0017
Battery Voltage	18V	18V	18V
Rated In-put Power	830w	750w	900w
No-Load Speed	8700rpm	8400rpm	9000rpm
Diameter Of Wheel	100-125mm	100-125mm	100-125mm
Charging Time	2-3hours	2-3hours	2-3hours



	4C0018	4C0019	4C0020
Battery Voltage	DC18V	DC18V	DC18V
No-Load Speed	8000r/min	7500r/min	8000r/min
Disc Dia.	Φ100mm/115mm	Φ115mm	Φ115mm
G.W/N.W	1.8kgs/1.5kgs	2.0kgs/1.8kgs	2.1kgs/1.9kgs
Packing Size	31x29x33.5cm/6pcs	32x31x35.5cm/6pcs	32x31x35.5cm/6pcs
20°FCL	5040pcs	5000pcs	5000pcs

CIRCULAR SAW

4C0021

Rated Voltage	18V
Rated Power	/
Saw Blade Size	/
Cutting Capacity	45°-90°



4C0022

Battery Voltage	18V
Bevel Angle	0-45°
Sawing Depth	40mm
Saw Blade Diameter	150mm
No-Load Speed	0-5000r/min

4C0023

Battery Voltage	18V
No-Load Speed	3600r/min
Blade Dia.	165x25.4x24T



MINI SINGLE
HAND SAW



4C0024	
Rated Voltage	18V
No-Load Speed	3800r/min
Guide Plate Size	6-12"
Cutting Diameter	125mm
Maximun Power	850W



4C0025	
Rated Voltage	18V
No-Load Speed	3800r/min
Guide Plate Size	6-12"
Cutting Diameter	125mm
Maximun Power	850W



4C0026	
Rated Voltage	18V
No-Load Speed	3800r/min
Guide Plate Size	6-8"
Cutting Diameter	125-150mm
Maximun Power	850W

SABER
SAW

4C0027	
Rated Voltage	18V
Ldle Speed	0-3500rpm
Maximum Travel Of Saw Iron	300mm
Diameter Of Saw Wood	300mm



4C0029	
Rated Voltage	18V
No-Load Speed	0-3000rpm
Reciprocating Stroke	15mm
Charging Time	2-3hours
Speed Mode	Stepless Speed Change
Max Cutting Thickness	150mm(wood)/6mm(mental)/40mm(plastic)

4C0028	
Rated Voltage	18V
No-Load Speed	0-3000rpm
Reciprocating Stroke	15mm
Charging Time	2-3hours
Speed Mode	Stepless Speed Change
Max Cutting Thickness	150mm(wood)/6mm(mental)/40mm(plastic)



MITER SAW




4C0030	
Battery Voltage	18V 4Ah
No-Load Speed	3600 rpm
Saw Blade	185x1.8x30x40T
Miter x Bevel	Width x Height(mm)
0°x 0°	203 x 51
45°x 0°	152 x 51
0°x 45°	203 x 35
45°x 45°	152 x 51



4C0031	
Battery Voltage	18V 4Ah
No-Load Speed	3600 rpm
Saw Blade	185x1.8x30x40T
Miter x Bevel	Width x Height(mm)
0°x 0°	203 x 51
45°x 0°	152 x 51
0°x 45°	203 x 35
45°x 45°	152 x 35



4C0032	
Battery Voltage	18V 4Ah
No-Load Speed	3000 rpm
Saw Blade	210x1.8x30x40T
Miter x Bevel	Width x Height(mm)
0°x 0°	120 x 60
45°x 0°	83 x 60
0°x 45°	120 x 35
45°x 45°	80 x 35

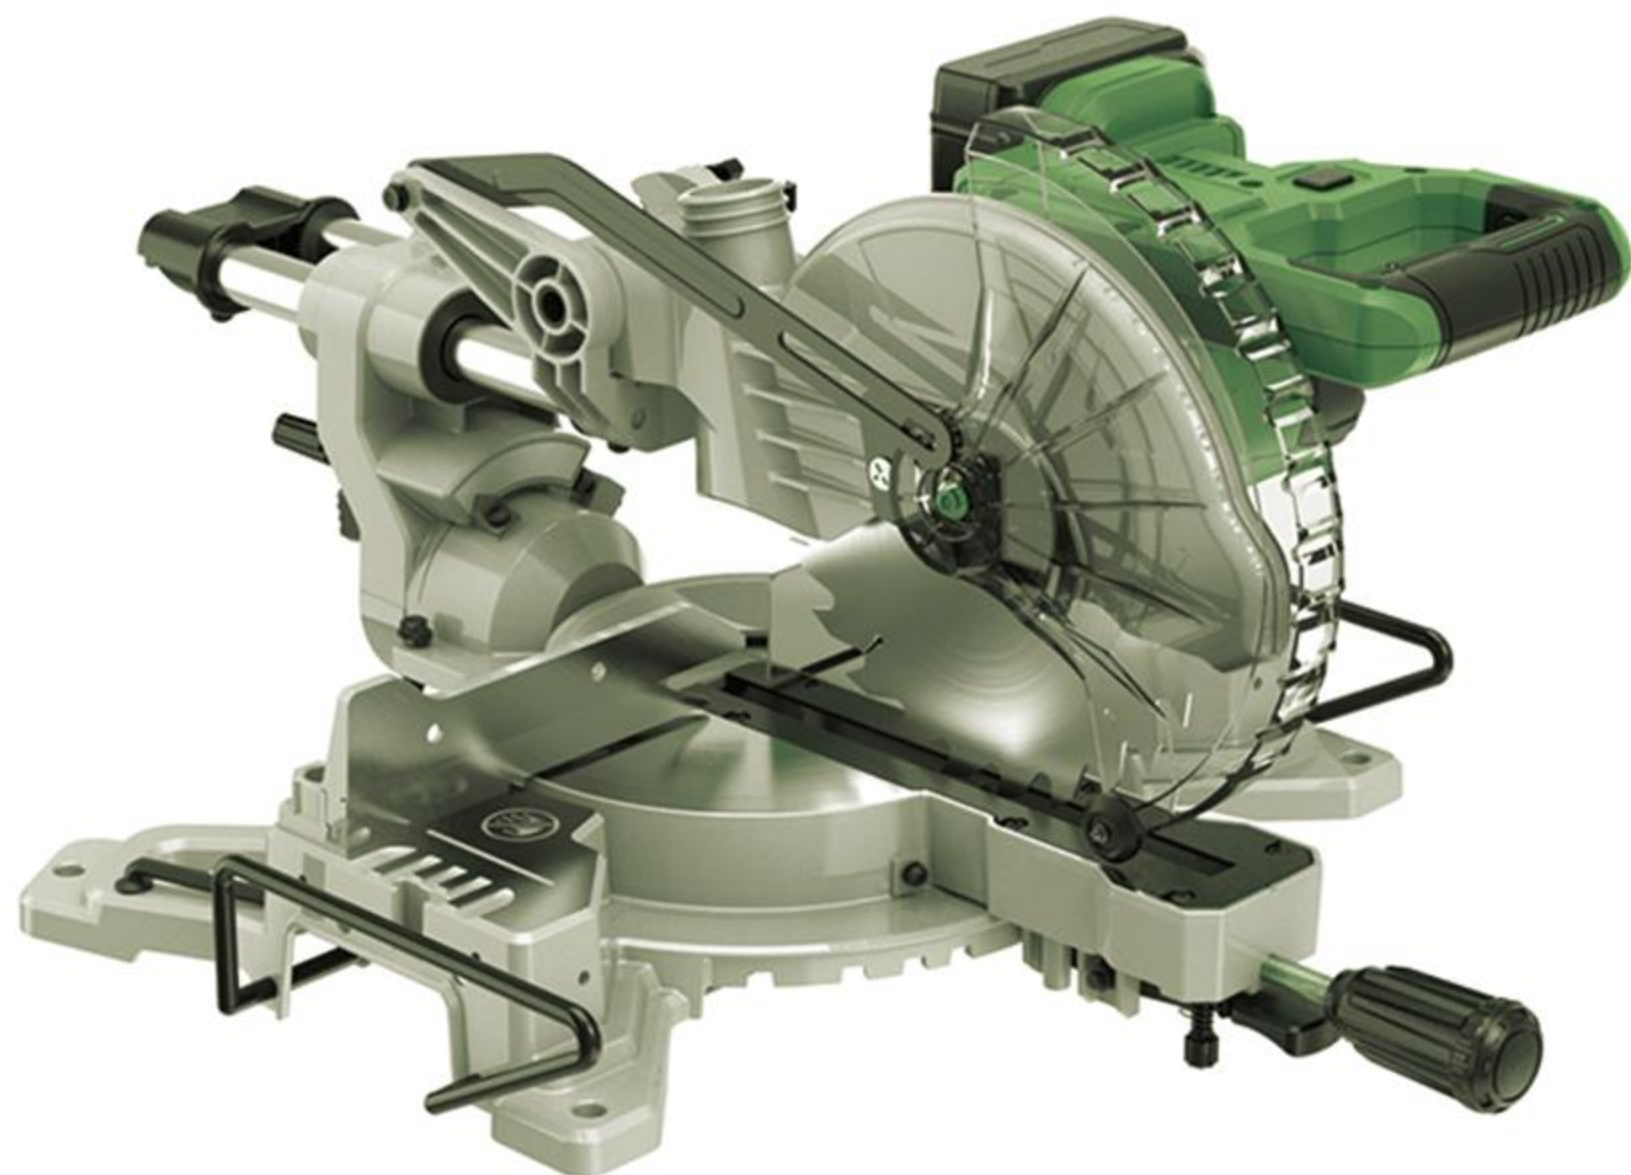

4C0033	
Battery Voltage	18V 4Ah
No-Load Speed	3600 rpm
Saw Blade	210x1.8x30x40T
Miter x Bevel	Width x Height(mm)
0°x 0°	220 x 70
45°x 0°	155 x 70
0°x 45°	220 x 35
45°x 45°	155 x 35

CURVED SAW



4C0034	
Rated Voltage	18V
Battery Capacity	3.0Ah/4.0Ah
Wood Cutting Depth	65mm
Pipe Cutting Depth	2mm
Reciprocating Stroke	18/mm



BAND
SAW

4C0035	
Power Supply	DC18V
Table Size	310x310mm
Table Material	Steel
Cutting Capacity Height	80mm@90° 40mm@45°
Cutting Capacity Width	200mm
Blade Size	1400x6.5x0.35mm
Unit Height	690mm



BAND
SAW

BRUSHLESS
MOTOR



4C0036	
Voltage	18V
Battery Capacity	4.0Ah
Blade speed	0-120m/min
Capacity	127X127mm
Blade	TPI 14
Blade Dimensions	1140mm(L)x13mm(W)x0.65mm(Thick)

BRUSHLESS
MOTOR



4C0038	
Voltage	18V
Battery Capacity	4.0Ah
Blade speed	0-192m/min
Capacity	65mm
Blade	TPI 18
Blade Dimensions	835mm(L)x13mm(W)x0.5mm(Thick)



4C0037	
Voltage	18V
Battery Capacity	4.0Ah
Blade speed	0-120m/min
Capacity	127X127mm
Blade	TPI 14
Blade Dimensions	1140mm(L)x13mm(W)x0.65mm(Thick)



4C0039	
Voltage	18V
Battery Capacity	4.0Ah
Blade speed	0-192m/min
Capacity	65mm
Blade	TPI 18
Blade Dimensions	835mm(L)x13mm(W)x0.5mm(Thick)

TABLE SAW


4C0040	
Battery Voltage	DC18V
Cutting Wheel Diameter	110mm
Output Speed	3800rpm
Blade Size	Φ110mmx22.2mm
Cutting Depth	24mm@90° 16mm@45°



4C0041	
Rated Voltage	18V
Cushion Size	123mm
Sandpaper Diameter	125mm
No Load Speed	11000/rpm
Wind Pressure	/kpa

OSCILLATING MULTI-TOOLS

4C0042	
Rated Voltage	21V
Battery Capacity	3.0Ah/4.0Ah
No Load Speed	1300/min
Rated Power	/
Swing Angle	/

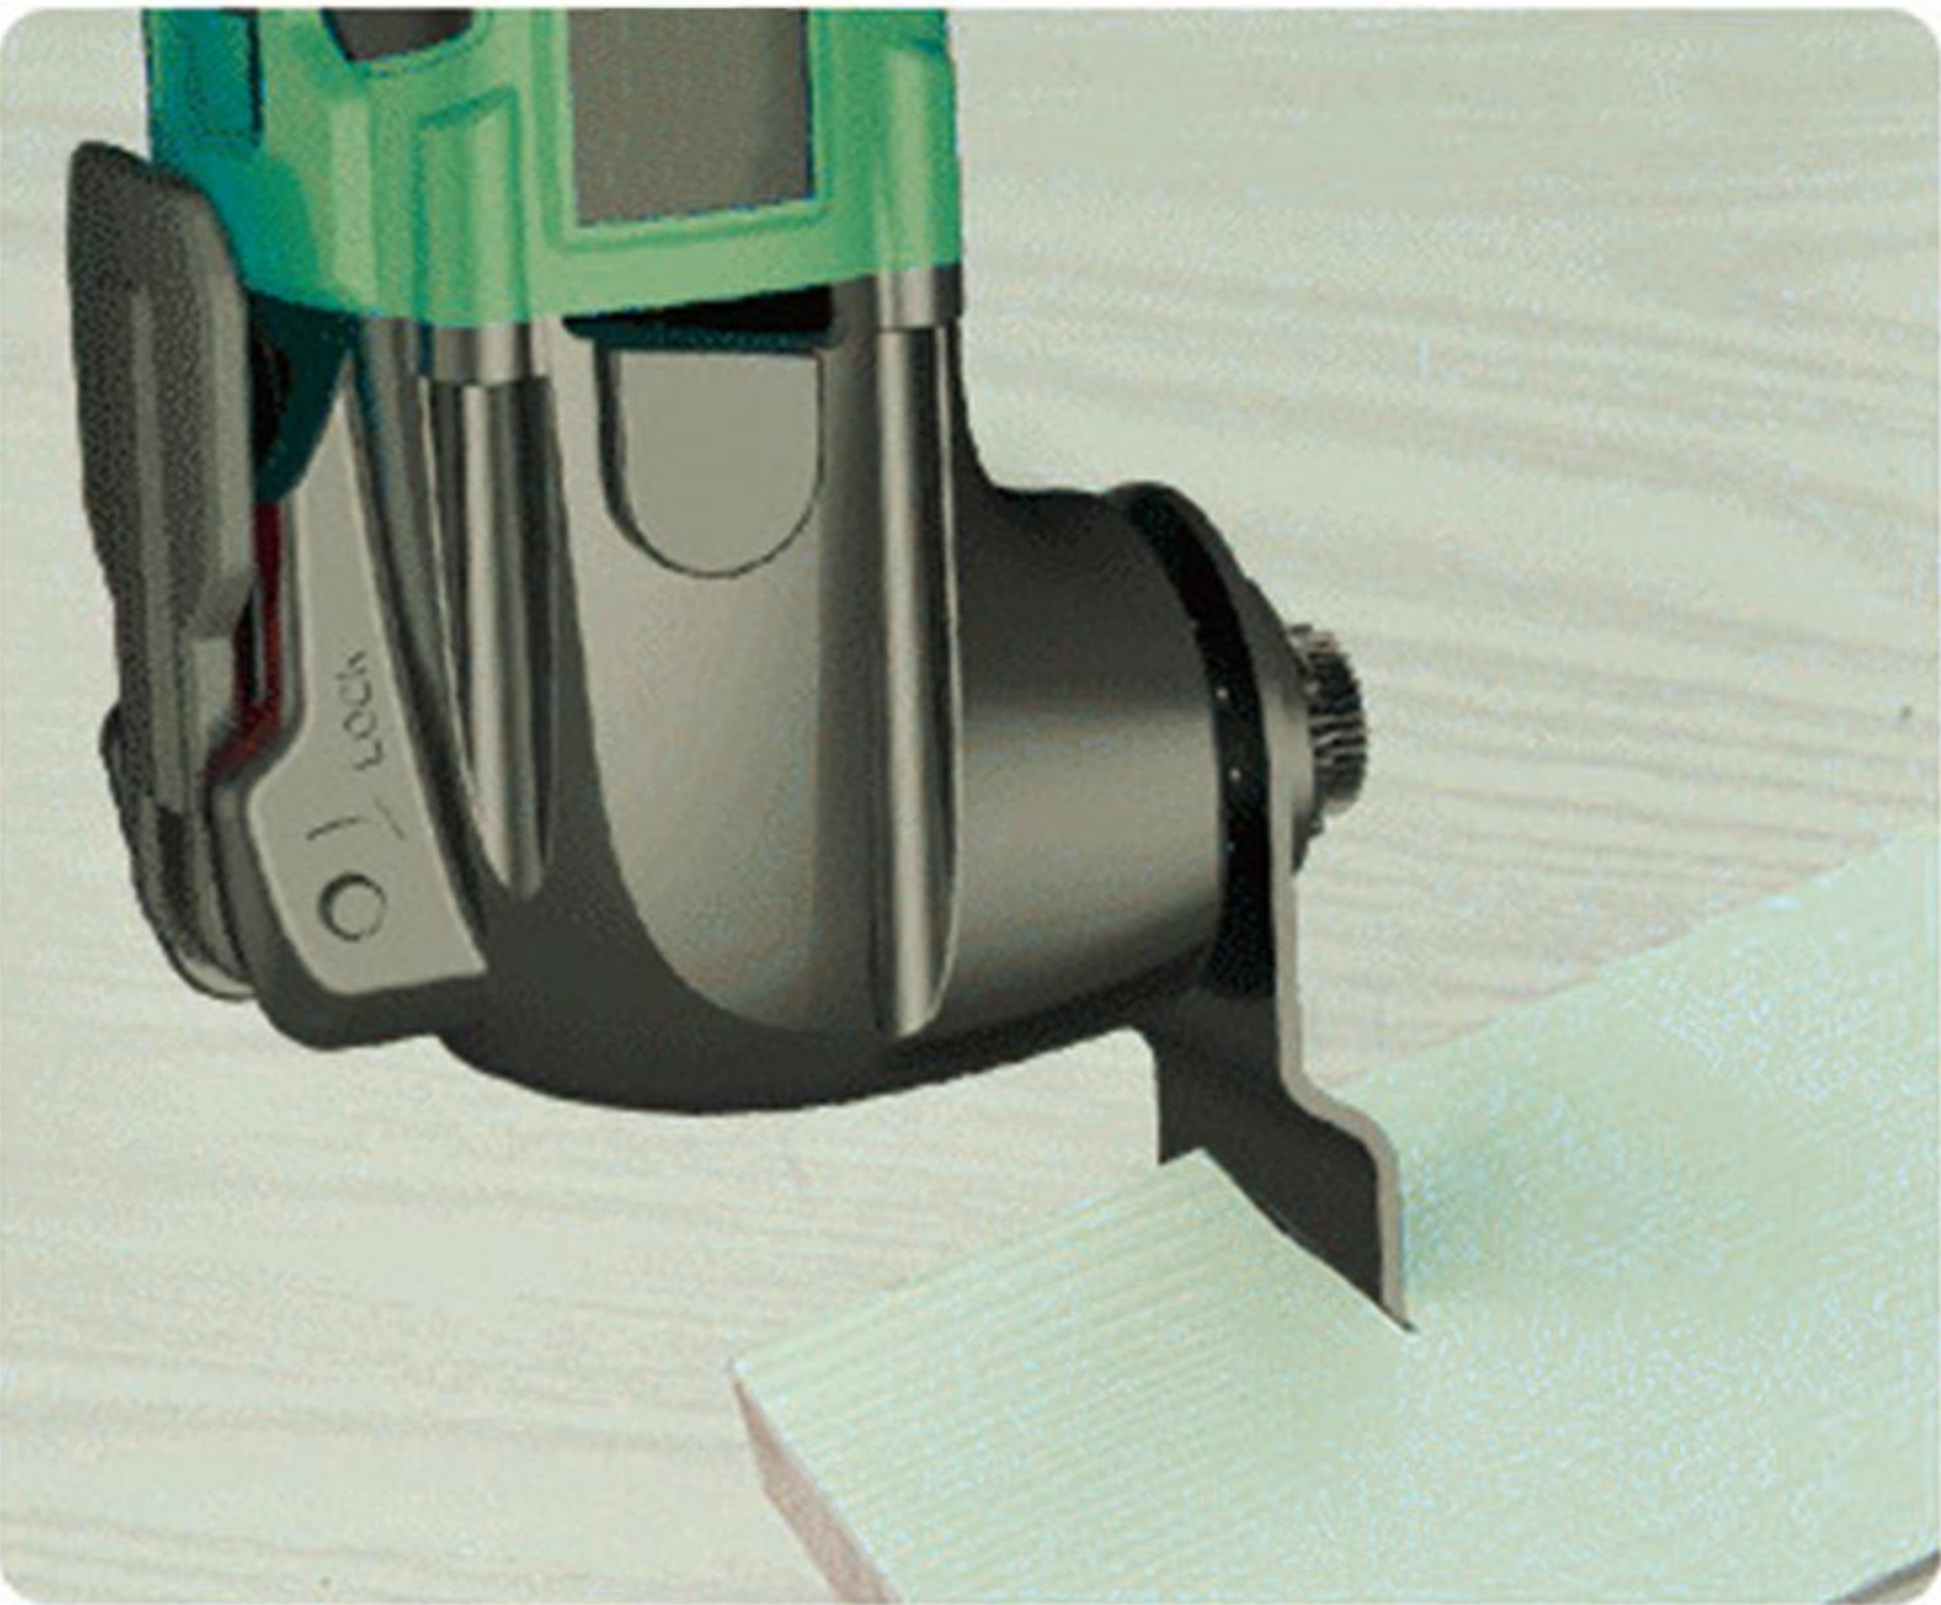

wood cutting



Timber openings

NAIL GUN



Model	4C0043	4C0044	4C0045	4C0046
Battery	18V	18V	18V	18V
Battery Charge	100-240V,50/60Hz	100-240V,50/60Hz	100-240V,50/60Hz	100-240V,50/60Hz
Fastener Type	21°Full Head Framing Nails	34°Clipped Head Framing Nails	9 GA Fencing Stables	18 GA Narrow Crown Stables
Fastener Range	2"-3-1/4"	2"-3-1/4"	1-1/2"-2"	1/2"-1-5/8"
Weight	9.3lbs	9.3lbs	10.3lbs	6.8lbs



Model	4C0047	4C0048	4C0049	4C0050
Battery	18V	18V	18V	18V
Battery Charge	100-240V,50/60Hz	100-240V,50/60Hz	100-240V,50/60Hz	100-240V,50/60Hz
Fastener Type	18 GA Brad Nails	18 GA Brad Nails	16 GA Straight Finish Nails	16 GA Straight Finish Nails
	18GA Narrow Crown Staples	18GA Narrow Crown Staples	/	18 GA Brad Nails
	/	/	/	18GA Narrow Crown Staples
Fastener Range	5/8"-2"	3/4"-2"	1"-2-1/2"	3/4"-2"
	5/8"-1-5/8"	3/4"-1-5/8"	/	5/8"-2"
	/	/	/	5/8"-1-5/8"
Weight	6.95lbs	6.17lbs	6.61lbs	6.95lbs



Model	4C0051	4C0052	4C0053	4C0054
Battery	18V	18V	18V	18V
Battery Charge	100-240V,50/60Hz	100-240V,50/60Hz	100-240V,50/60Hz	100-240V,50/60Hz
Fastener Type	18 GA Brad Nails	Single Concrete Pin	Strip Concrete Pin	23 GA Pin Nails
Fastener Range	5/8"-2"	3/4"-3"	5/8"-1-1/2"	5/8"-1-3/8"
Weight	6.61lbs	8.48lbs	9.5lbs	4.4lbs

LITHIUM BATTERY
RIVET GUN

4C0055	
Battery Voltage	18V
Impact Rate At Rated Speed	0-5500bpm
Rated Speed	0-850rpm
Max. Impact Energy	1.3J
Max. Drill Dia. in Steel	10mm
Max. Drill Dia.in Concrete	13mm
Max. Drill Dia. in Wood	16mm
Toolholder	SDS-Plus



BURNISHING
POLISHING MACHINE

4C0056	
Voltage	18V
Power	500W
Speed	2000-4500rpm
Diameter od pad	100mm
Deviation	5mm
Measurement	40x38x30cm/4pcs
G.W./N.W.	13kg/12kgs
Loading Quantity	2100/4400/5160pcs



ORBITAL
POLISHER



4C0057	
Battery Voltage	DC18V
No-Load Speed	1000-3500r/min
Maximum Polishing Pad Diameter	160mm or 6.3 inches
Velcro Pad	150mm(6inches)
Orbit(stroke length)	7.5mm
Orbit rate,without Load	100-4500 opm



4C0058	
Rated Voltage	DC18V
Cushion Size	123mm
Sandpaper Diameter	125mm
No Load Speed	11000/rpm
Wind Pressure	/kpa

CORDLESS
PLANNER

Planing Wood
Surface Smooth

4C0059	
Voltage	18V
Battery	Lithium
No-Load Speed	10000r/min
Weight	3.4kgs
Cutting Capacity Width	82mm
Cutting Capacity Depth	2.0mm
Application	Wood Woking




BISCUIT
JOINTER

4C0060	
Battery Voltage	DC18V
No-Load Speed	8000r/min
Disc Dia.	100x3.8x6T
Biscuit Spec	#0,#10,#20



4C0061	
Battery Voltage	DC18V
No-Load Speed	8500rpm
Disc Dia.	100x3.8x6T
Biscuit Spec	#0,#10,#20

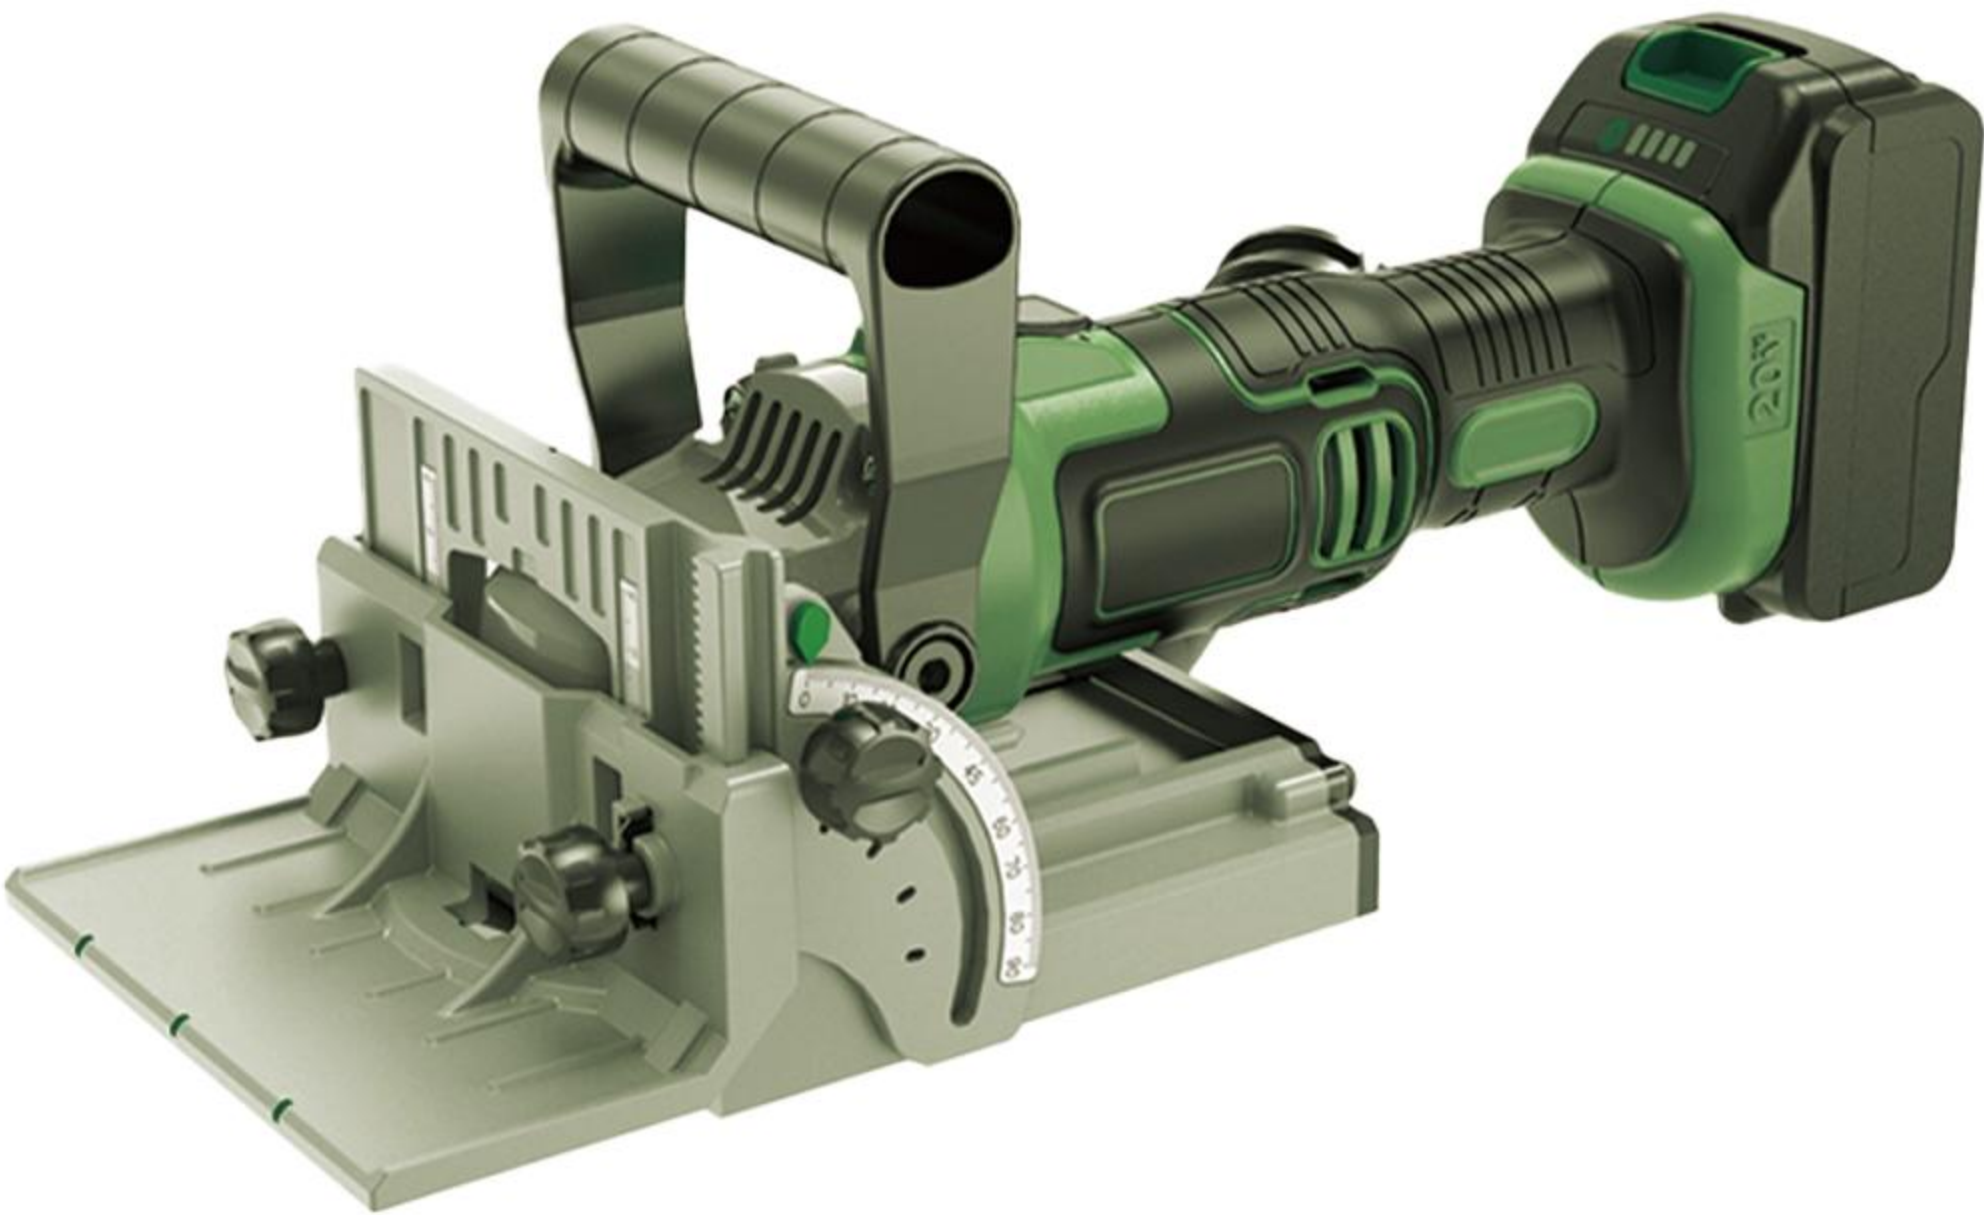

4C0062	
Battery Voltage	DC18V
No-Load Speed	8000r/min
Disc Dia.	100x3.8x6T
Biscuit Spec	#0,#10,#20



CORDLESS
ROUTER

4C0063

Rated Voltage	18V
Battery Capacity	2Ah/4.0Ah
No Load Speed	/
Rated Power	/
Cutter Head Diameter	/



LITHIUM
LEVEL PAVER



4C0064

Rated Voltage	18V
Vibration Adjustment	6gears
Vibration Frequency	12500r/min
Adsorption Capacity	120kg
Applicable Tiles	Within 130cm

INFLATING
MACHINE



4C0065

Rated Voltage	18V
Battery Capacity	3.0Ah/4.0Ah
Maximum Air Pressure	830/kpa
Exhaust Volume	10L/Min
Straw Length	650/mm



4C0066

Rated Voltage	18V
Battery Capacity	1.3Ah/1.5Ah/2.0Ah
Maximum Air Pressure	/
Exhaust Volume	/
Straw Length	/



4C0067

Rated Voltage	18V
Battery Capacity	2000mAh*5
Power	120W
Max Current	12V/9A
Working Time	20-30min
Charging Time	2-4h
Maximum Air Pressure	120psi
Flow	28L/min
Air Hose Length	60cm
Power Line	3.0m±0.2m



4C0068

Rated Voltage	18V
Battery Capacity	2000mAh*5
Power	120W
Max Current	12V/9A
Working Time	20-30min
Charging Time	2-4h
Maximum Air Pressure	120psi
Flow	28L/min
Air Hose Length	60cm
Power Line	3.0m±0.2m

GLUE GUN



4C0069

Rated Voltage	18V
Power	800W/100W
Applicable Glue Stick	11mm



4C0070

Rated Voltage	18V
Rated Voltage	800W/100W
Applicable Glue Stick	11mm

HEAT GUN



4C0071

Rated Voltage	18V
Power	800W/100W
Applicability	/

ELECTRIC
SOLDERING IRON



4C0072	
Rated Voltage	18V
Rated Power	60W/80W

4C0073	
Rated Voltage	18V
Rated Power	60W/80W



HOT WELDING
MACHINE




4C0074	
Rated Voltage	18V
Rated Power	50W/70W/90W

GREASE GUN



4C0075

Rated Power	200w
Capacity	600CC
Rated Voltage	21V/24V
Oil Discharge Pressure	12000PSI
Oil Pump Capacity	160K/min
Pipe Diameter	63mm
Length	420mm
Battery Capacity	2300x5MA
Charger	1.2A

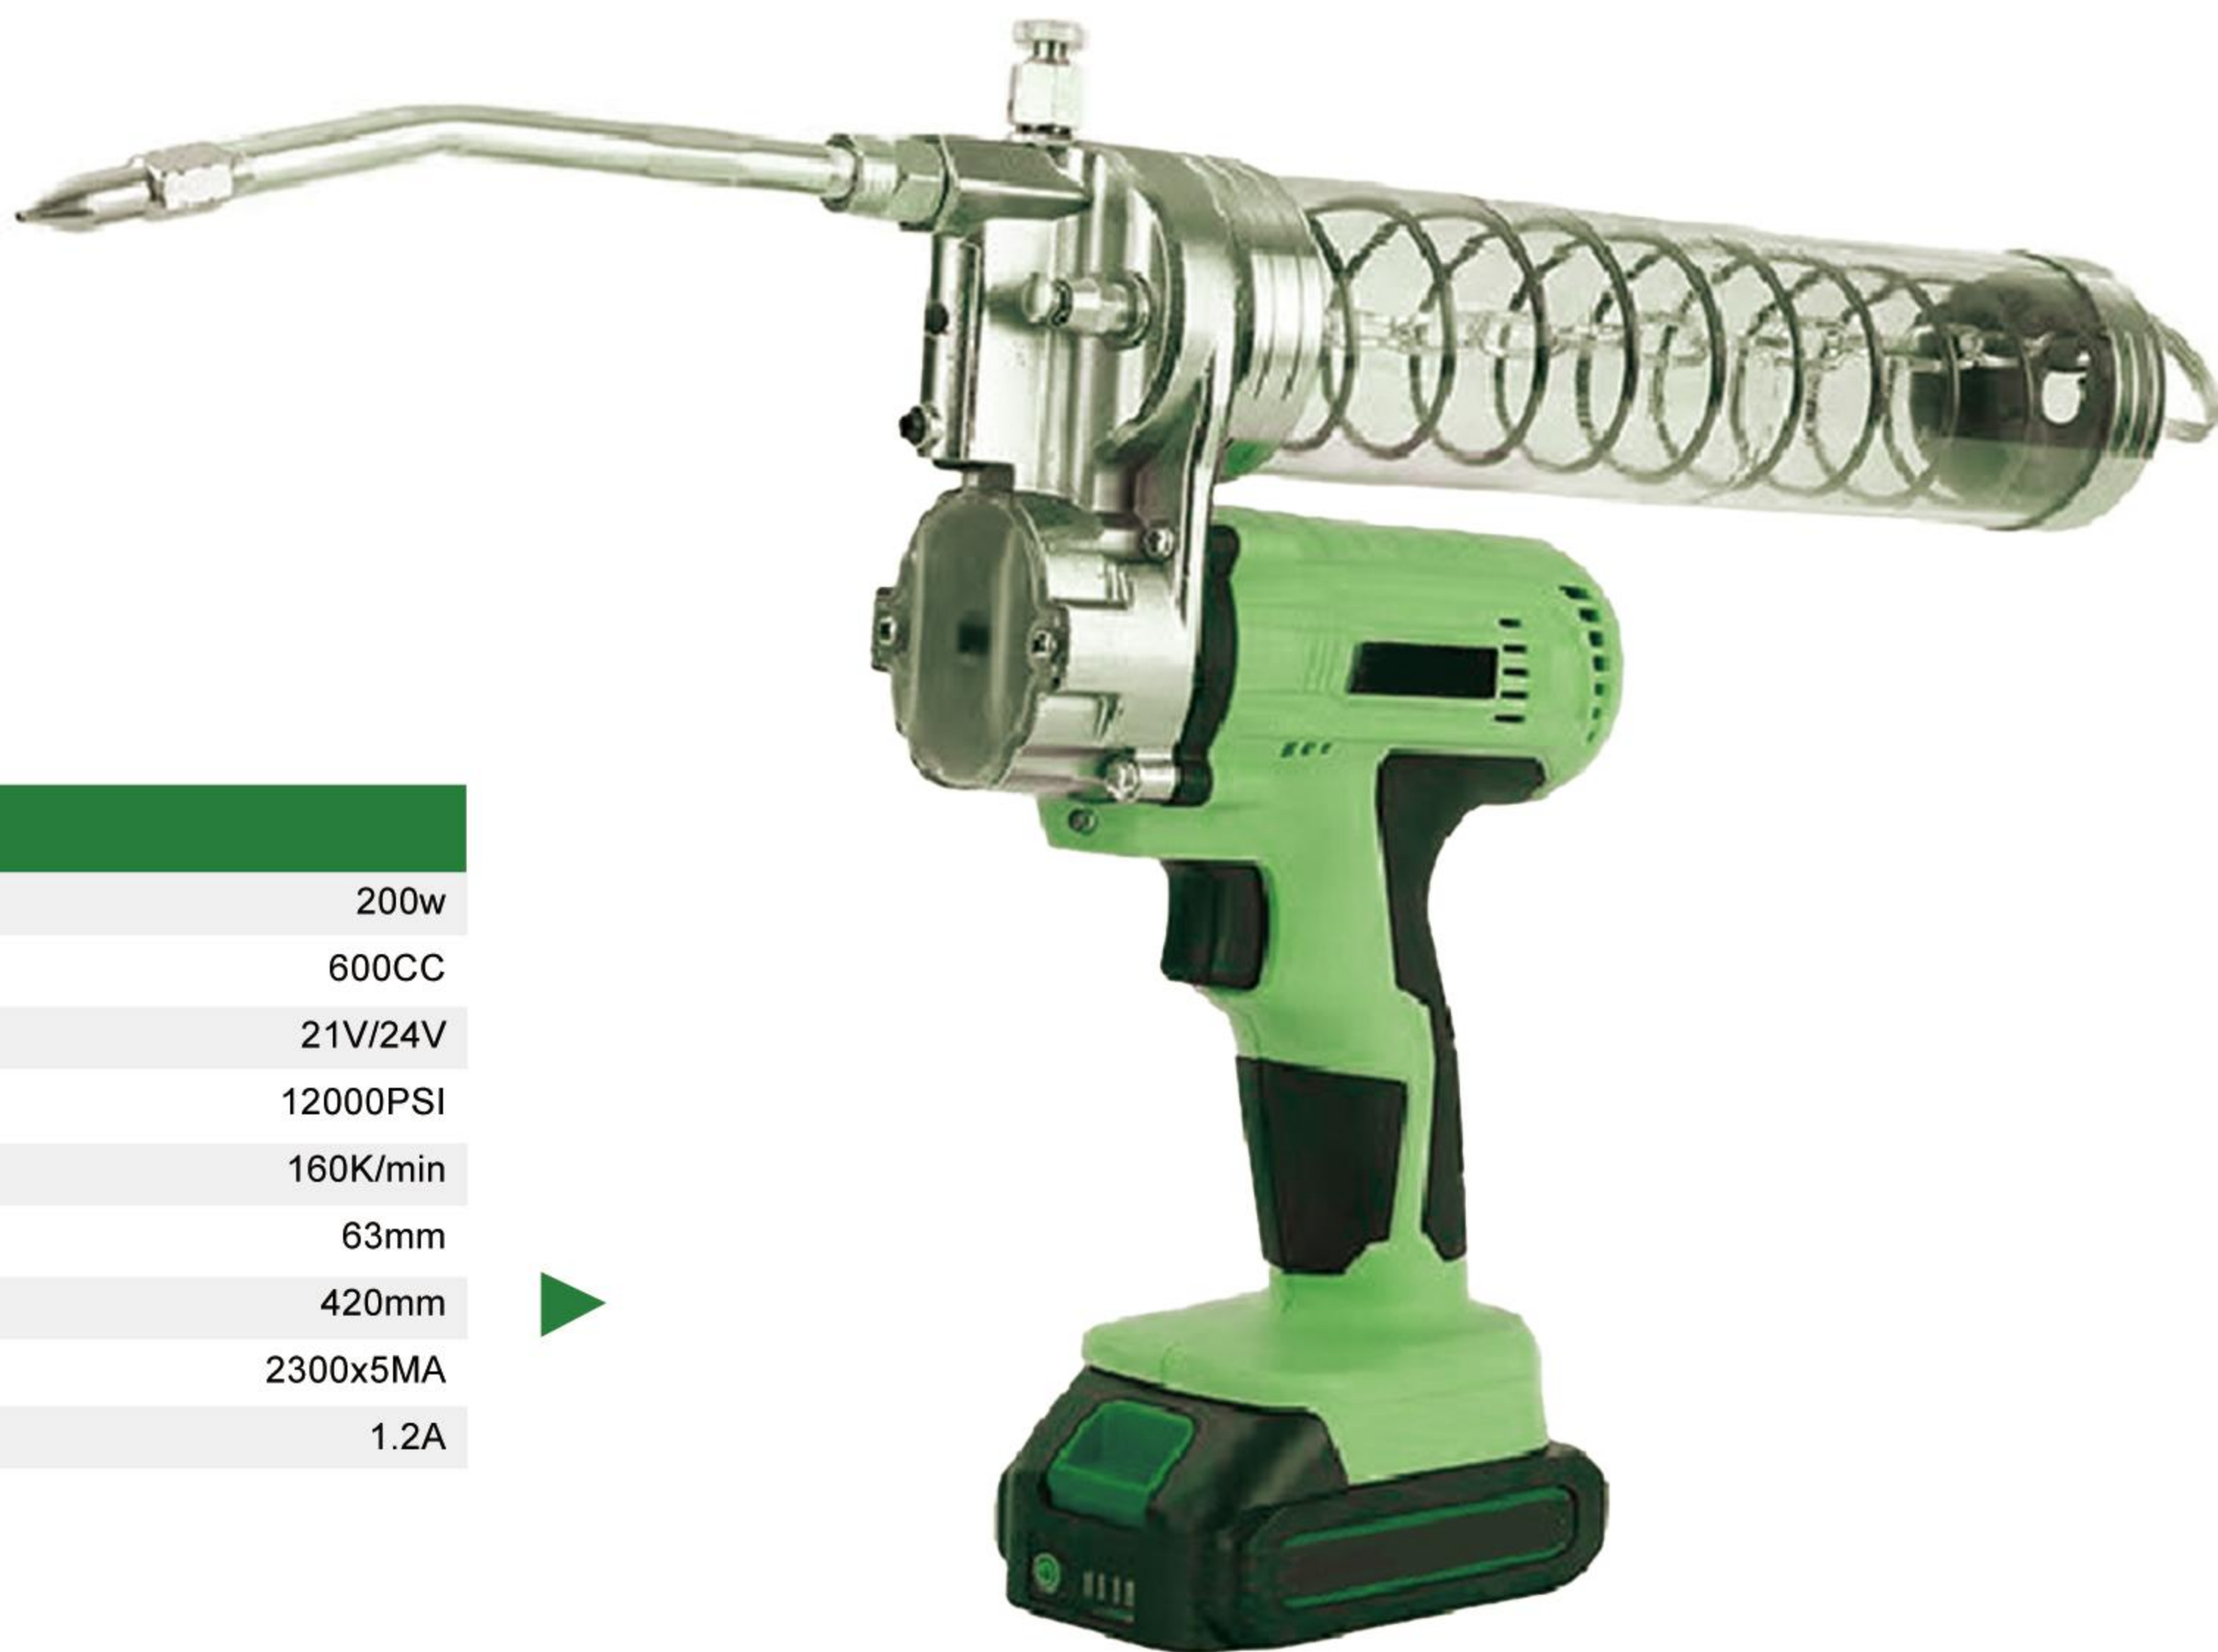

4C0076

Rated Power	200w
Capacity	600CC
Rated Voltage	21V/24V
Oil Discharge Pressure	12000PSI
Oil Pump Capacity	160K/min
Pipe Diameter	63mm
Length	420mm
Battery Capacity	2300x5MA
Charger	1.2A

LITHIUM BATTERY
THREADING MACHINE



4C0077

Rated Output	400w
No Load Speed	200-600r/min
Rated Voltage	21V
Battery Capacity	20000mAh
Rod Length	60cm
Package Size	34x21x25.5cm 1 pcs
G.W.	4.5kg

WORK LIGHT

4C0078

Illuminant	LED
Rated Voltage	18V
Power	8W
Swith Type	Contact switch



4C0079

Power Source	18V
Wattage	30/20/10W
Lumen	2700/2100/1500LM
Runtime	2.5h/3.5h/7h with 4Ah battery
Carry Handle	Yes
Tilt Adjustment	0-360°



4C0080

Power Source	18V
Wattage	20/15/10W
Lumen	Max.2200 LM
Runtime	3.5h with 4Ah battery
Carry Handle	Yes
Tilt Adjustment	0-360°

FAN

4C0081

Power Source	18V
	100-240Vac to 12V DC adaptor
	185mm/with 3x fan blades
Fan Diameter	Hi-7hrs,Ml-Lo-10hrs@18V 4Ah
Runtime	Hi-7hrs,Ml-Lo-10hrs@18V 4Ah
Carry Handle	0-360°
Tilt Adjustment	



Thick material,wear-resistant and resistant to falling.
Stepless adjustment knob for fan,separated switch for LED light.
Suitable for outdoor work, camping, and home use.
For your safety, please read the instructions carefully before use.

4C0082

Power Source	18V 9"(4xfan blades) 100-240V AC to 18V DC adaptor
Run Time	High-6hrs,low-20hrs with 4.0Ah battery
No-load Speed	1300-3300rpm
Tilt Adjustment	0-90°
Weight	3.0kgs
Brushed Motor	#550 with carry handle,with LED light

ICE BUCKET

4C0142	
Ext.size	L640 W490 H435
Int.size	L555 W345 H335
Volume	54L
Packaging	Carton
Carton Size	L670 W510 H460m
Pcs/Carton	1Pcs



VACUUM

4C0083	
Air Watts	65W
Tank Capacity	23.6 oz (0.7L)
Motor	Brushed
sound pressure level	72-89dB
Volts	20V
Weight (without battery)	2450g
LED Lights	Yes
Wet/Dry	Dry ONLY
Accessories	"Crevice Nozzle, Round Brush, Gulper Brush, Extension, Floor Accessory"
Inner carton size	25*57*23cm
Outer carton size	59*53*49cm
Package	4pcs



VACUUM 4 IN 1

4C0084	
Dust Cup Capacity	220ml
Paper Filter Diameter	60mmx30mm
Suction	8000pa
Working Current	5A
Noise	70DB

V
A
C
U
U
M
4
I
N
1



HIGH-END
CLEANING
MACHINE



Voltage: DC18V

LITHIUM BATTERY
VIBRATING RULER

4C0089

Rated Output	60w
No Load Speed	3000-6000r/min
Rated Voltage	18v
Battery Capacity	20000mAh
Scraper Knife Size	80-200cm
Machine Head Package Size	55x30x12.5cm 1pcs
Single Foot Package Size	152.5x8.8x5.6cm 1pcs
G.W.	6.5kg



Model	4C0085	4C0086	4C0087	4C0088
Motor	DC-RS755 motor Φ14mm pump	DC-RS755 motor Φ14mm pump	DC-RS550 motor Φ12mm pump	BLDC motor Φ12mm pump
Voltage	18V/4.0Ah	18V/4.0Ah	18V	18V/4.0Ah
Continuous Working Time	20 min	20 min	20 min	20 min
Rated Power	220W	250W	130W	200W
Working Current	11A	13A	6.5A	12A
Working Pressure	2Mpa(290PSI)	2.2Mpa(320PSI)	1.2Mpa(176PSI)	2Mpa(300PSI)
Max Prussure	4Mpa	4.5Mpa	3.5Mpa	3.5Mpa
Working Flow	3.5L/min	3.8L/min	2.9L/min	3.6L/min
Max Flow	4.2L/min	4.5L/min	3.5L/min	3.5L/min
Effluent pattern	0°-40° adjustable	0°-40° adjustable	0°-40° adjustable	0°-40° adjustable

4C0090

Rated Output	60w
No Load Speed	3000-6000r/min
Rated Voltage	18v
Battery Capacity	20000mAh
Scraper Knife Size	80-200cm
Machine Head Package Size	55x30x12.5cm 1pcs
Single Foot Package Size	152.5x8.8x5.6cm 1pcs
G.W.	6.5kg



LITHIUM BATTERY
HIGH-POWER CEMENT VIBRATOR

4C0091	
Rated Output	400w
No Load Speed	3000-6000r/min
Rated Voltage	18V
Battery Capacity	20000mAh
Rod Length	1m/1.5m/2m
Package Size	54.5x29.5x12cm 1pcs
G.W.	5.7kg



4C0092	
Rated Output	150w
No Load Speed	3000-6000r/min
Rated Voltage	18V
Battery Capacity	20000mAh
Rod Length	1m/1.5m/2m
Package Size	49.5x25x11cm 1pcs
G.W.	5.1kg



LITHIUM LATTERY
STRAIGHT-HANDLE
TROWELING MACHINE

4C0093	
Rated Output	400w
No Load Speed	80-200r/min
Rated Voltage	18V
Battery Capacity	20000mAh
Grinding Disc Diameter	380mm
Package Size	39.5x39.5x32cm 1pcs
G.W.	4.6kg



4C0094	
Rated Output	400w
No Load Speed	80-200r/min
Rated Voltage	18V
Battery Capacity	20000mAh
Grinding Disc Diameter	380mm
Package Size	39.5x39.5x32cm 1pcs
G.W.	4.6kg



AIR
COMPRESSOR

4C0095	
Tank	10L
Weight	11.8kgs
Motor	Brushless
Air Delivery	45.3L/min
Battery	20V 4.0Ah
Fill-up Time	≈90s
Max. Pressure	8.3Bar
Battery Runtime	Up to 1900 nails F30 with fully charged 4.0Ah battery
Cut-in/Cut-off	6.2Bar/8.3Bar
Quiet	68dBA



VACUUM
CLEANER

4C0144	
Voltage	18V
Rated Power	180w
Capacity	10L
Box Measurement	380x240x260mm
Loading Quantity	1165/2390/2697
Vacuum	>15kpa



VACUUM
CLEANER

4C0096	
Rated Power	100/200w
Capacity	10L
Weight	3.5/3.1kg
Box Measurement	350x245x290
Loading Quantity	1165/2390/2697
Max Airflow/L/S	12±1/16±1
Noise Level/dB	76



4C0097	
Rated Power	150w
Capacity	15L/20L/25L/30
Max Airflow/L/S	12±2
Noise Level/dB	72



4C0098	
Rated Power	110/130
Capacity	10L/12L/15L/20L
Max Airflow/L/S	11±2
Noise Level/dB	72

BLUETOOTH
SPEAKER



4C0099	
Bluetooth Version	5.0
Rated Power	60W
Peak Power	120W
Horn	2*2.75Medium and high frequency horn,1 * 4 inch low-frequency horn
Charging Voltage	100V-240V
Bluetooth Connection Distance	≥30-31meters
Supporting Interfaces	AUX/USB(2.4A)/PD20W
Product Size	350*160*190mm
Waterproof Grade	splashproof



4C0100	
Bluetooth Version	5.0
Rated Power	40W
Peak Power	80W
Horn	2 * 3 inch full frequency
Charging Voltage	100V-240V
Bluetooth Connection Distance	≥30-31meters
Supporting Interfaces	AUX/USB(2.4A)/PD20W
Product Size	320*139.2*183mm
Waterproof Grade	splashproof



SECATEURS

4C0101	
Battery Voltage	18V
Shear Diameter	0-30mm
Charger Output	21V/2.0A
Charging Time	2-3hours



4C0102	
Battery Voltage	18V
Shear Diameter	0-35mm
Charger Output	21V/2.0A
Charging Time	2-3hours

PUTTY
ASH MIXER



4C0103	
Rated Output	400w
No Load Speed	200-600r/min
Rated Voltage	21V
Battery Capacity	20000mAh
Rod Length	60cm
Package Size	34x21x25.5cm 1 pcs
G.W.	4.5kg

STRAIGHT-HANDLE
TROWELING MACHINE



4C0105	
Rated Output	150w
No Load Speed	2500r/min
Rated Voltage	21V
Lengthening Method	Three-stage quick extension
Battery Capacity	20000mAh
Package Size	60x35x10cm 1pcs
G.W.	6.5kg

4C0104	
Rated Output	400w
No Load Speed	3000-6000r/min
Rated Voltage	21V
Battery Capacity	20000mAh
Grinding Disc Diameter	120/180/200mm
Package Size	98x22x15cm 1pcs
G.W.	6kg



GRASS TRIMMER

TELESCOPE ALUMINIUM SHAFT
To adjust the tool to the operator's body size.

ADJUSTABLE FRONT HANDLE
Allows the user to find the best ergonomic posture in order to minimise muscle strain during prolonged use.

90° ADJUSTABLE CUTTING HEAD
Adjustable over a 90 ° range for easy trimming under low outdoor furniture, hedges and bushes.

3 TOOLS IN ONE
Easily converts to an in-line wheeled edger for a flawless finish along driveways and edges.

UNPARALLELED ERGONOMICS
The telescopic shaft and adjustable front handle fit the user's body.

OPTIONAL
Instant conversion from grass trimmer to lawn mower.

Flower guard
Prevents damage to flower beds and scratches on outdoor furniture.

4C0106	
Rated Voltage	18V
Battery Capacity	4.0Ah
Maximum Speed	7600r/min
Cutting Diameter	300mm
Weight	2.4kg
Motor Type	front motor



GRASS TRIMMER

4C0109	
Rated Voltage	18V
Battery Capacity	4.0Ah
Maximum Speed	6000r/min
Cutting Diameter	220mm
Weight	3.0kg
Height Adjustment	30/40/50cm

COMFORTABLE HANDLE

One or two hand operation
For flexible working

COMPACT STRUCTURE

This allows it to easily reach even
hard-to-reach places

CONVENIENT OPERATION

Cutting-height adjustment-easy
to adjust to the desired height



- Ideal for small lawns with up to 50m²
- No need of disposal
- Lightweight, manoeuvrable and compact
- Mulching blade - to cut it fine
- LED indicator



4C0107	
Rated Voltage	18V
Battery Capacity	4.0Ah
Maximum Speed	6500r/min
Cutting Diameter	1.5mm*255mm
Weight	2.0mm*380mm
Motor Type	Brushless



4C0108	
Rated Voltage	18V
Battery Capacity	4.0Ah
Maximum Speed	6500r/min
Cutting Diameter	1.5mm*255mm
Weight	2.0mm*380mm
Motor Type	Brushless

GRASS
TRIMMER



4C0110	
DC Voltage	20V
Cutting Width	30cm
No-load Speed	7200rpm
Auto Feeder	1.6mm nylon line
Adjustable Height	40-85mm



4C0111	
Motor	4825 brushless motor
Voltage	2x20V
No-load Current	2.2-2.5A
No-load Speed	3500rpm
Loaded Speed	5000-6500rpm
Line Diameter	2.0mm
Cutting Diameter	350-370-390mm

LAWN
MOWER



4C0112	
Voltage	18V
Cutting Diameter	320mm
No-load Speed	3500rpm
Wheel Dia	140mm
Collection Bag Capacity	30L
Adjustable Height	25/35/45/55/65mm

SCARIFIER

4C0113	
Voltage	18V
No-load Speed	3200rpm
Cutting Width	360mm
Working Depth	-11,-7,-3,+3,+10mm
Height Adjustment	central 5 postions
Collection Bag Capacity	45L fabric




LAWN
MOWER

4C0114	
Motor No-Load Speed	3300rpm
Deck Cutting Size	14" (360mm)
Cutting Height	25-75mm
Product Weight	14.0kg
Battery	4.0Ah*1

LAWN
MOWER

4C0115	
Power	550W
Motor No-Load Speed	3000rpm
Deck Cutting Size	16" (400mm)
Cutting Height	25-75mm
Product Weight	19.5kg
Bag Size	45L
Battery	4.0Ah*2

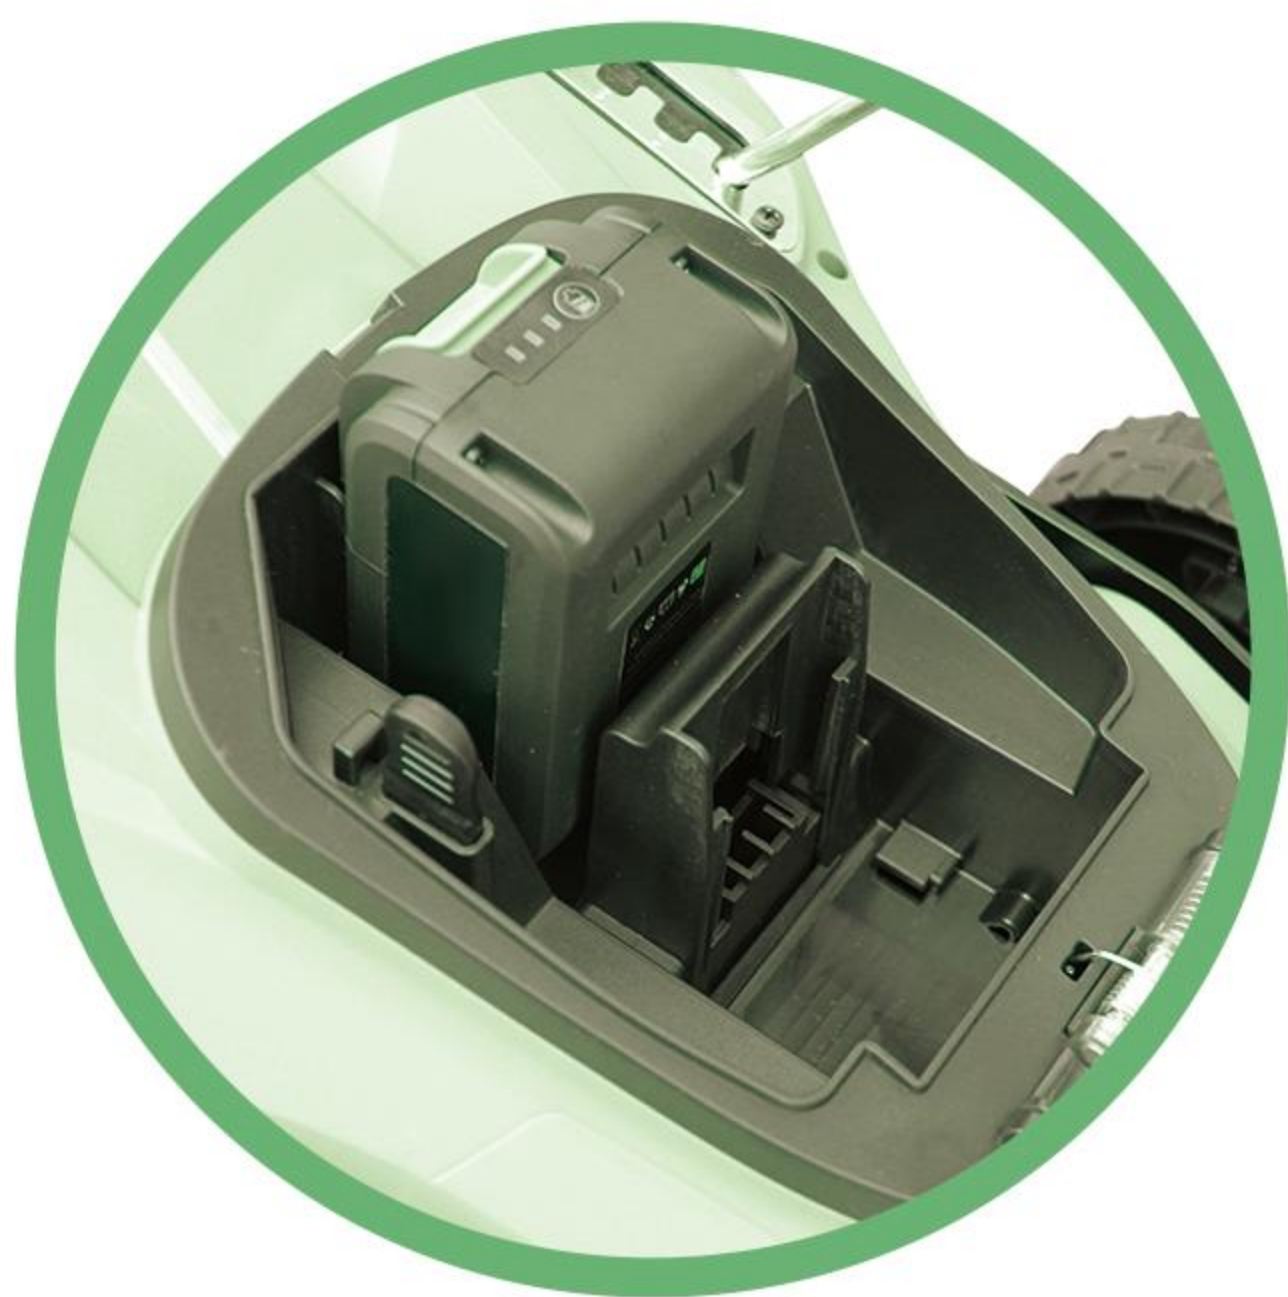

MINI SAW



4C0116

Voltage	18V
No-load Current	4A
Bar and Chains	5/6"
Chain speed	4.72m/s

PRUNER



4C0117

Voltage	18V
Motor	Brushless Motor
Cutting Width	30mm
Cutting Speed	0.7s

HANDHELD SPREADER



4C0120

Voltage	18V
No-load Current	0.2A
No-load Speed	1000-1700rpm
Capacity	5.5L
6 Sections Spreadwidth Ajustment	
7 Speeds Adjustment	

BUG ZAPPER



4C0121

Voltage	18V
LED	L:33lm M:45lm H:65lm
Timing Function	2h 4h 6h
USB	5V 2A
High Voltage Network	2500V
UV Lamp	365nm purple light attract 10W

SNOW SHOVEL



4C0118

Voltage	18V
No-load Speed	2200rpm
No-load Current	5A
Width	12"(300mm)
Throwing height	1.2m(front);1m(side)
Throwing distance	4.2m(front);2.5m(side)



4C0119

DC Voltage	18V
Width	33cm
Depth	11cm
Throwing height	2m(front);1.5m(side)
Throw Distance Max	6.5m(front);4.5m(side)

BLOWER & VACUUM



4C0122

Motor	6030 brushless motor
Voltage	18V
Loaded Speed	7500-15000rpm
Max Air Speed	81m/s
Max Air Volume	150cfm
Collection Bags	40L
Mulch Ration	10:1

LEAF SHREDDER



4C0123

Voltage	18V
No-load Speed	7000rpm
Line Diameter	2.5mm
Cutting Width	320mm

BLOWER



4C0124	
Voltage	18V
Battery	1500mAh
No load speed	13000/min
Blowing speed	200km/h
Charging time	4hours
Running time	15mins
Weight	2.0KG



4C0125	
Voltage	18V
Motor	Brushless Motor
Cutting Width	30mm
Cutting Speed	0.7s

MINI
CHAIN SAW



4C0126	
DC Voltage	18V
No load speed	6.5m/s
Blade length	oregon 4"
CuttingLength	95MM
Battery	Lithium 2000mAh
Charging time	1hour
Weight	1.5KG

MINI SAW



4C0127	
DC Voltage	18V
No load speed	4m/s
Blade length	8"
CuttingLength	140/180MM
Weight	3.5KG

CHAIN SAW



4C0128	
Voltage	18V
No-load Current	0.2A
No-load Speed	1000-1700rpm
Capacity	5.5L
6 Sections Spreadwidth Ajustment	
7 Speeds Adjustment	

HEDGE
TRIMMER



4C0130	
DC Voltage	18V
Battery	1.5/2.0/3.0/4.0Ah
No load speed	1150spm
CuttingLength	180MM
Cutting width	120MM
Charging time	4hours
Running time	70mins
Weight	1.8KG

RECIPROCATING
SAW




4C0129	
DC Voltage	18V
No load speed	2700spm
Stroke length	20mm
Paw width	60mm
Cutting width	blade for wood 800mm
Cutting width	blade for metal 10mm
No load running time	40mins
Weight	1.6KG

HEDGE
TRIMMER



4C0131	
DC Voltage	18V
Battery	1500mAh
No load speed	1150spm
CuttingLength	180MM
Cutting width	100MM
Charging time	4hours
Running time	70mins
Weight	1.4KG

Multi-function one pole,
suits four different function heads

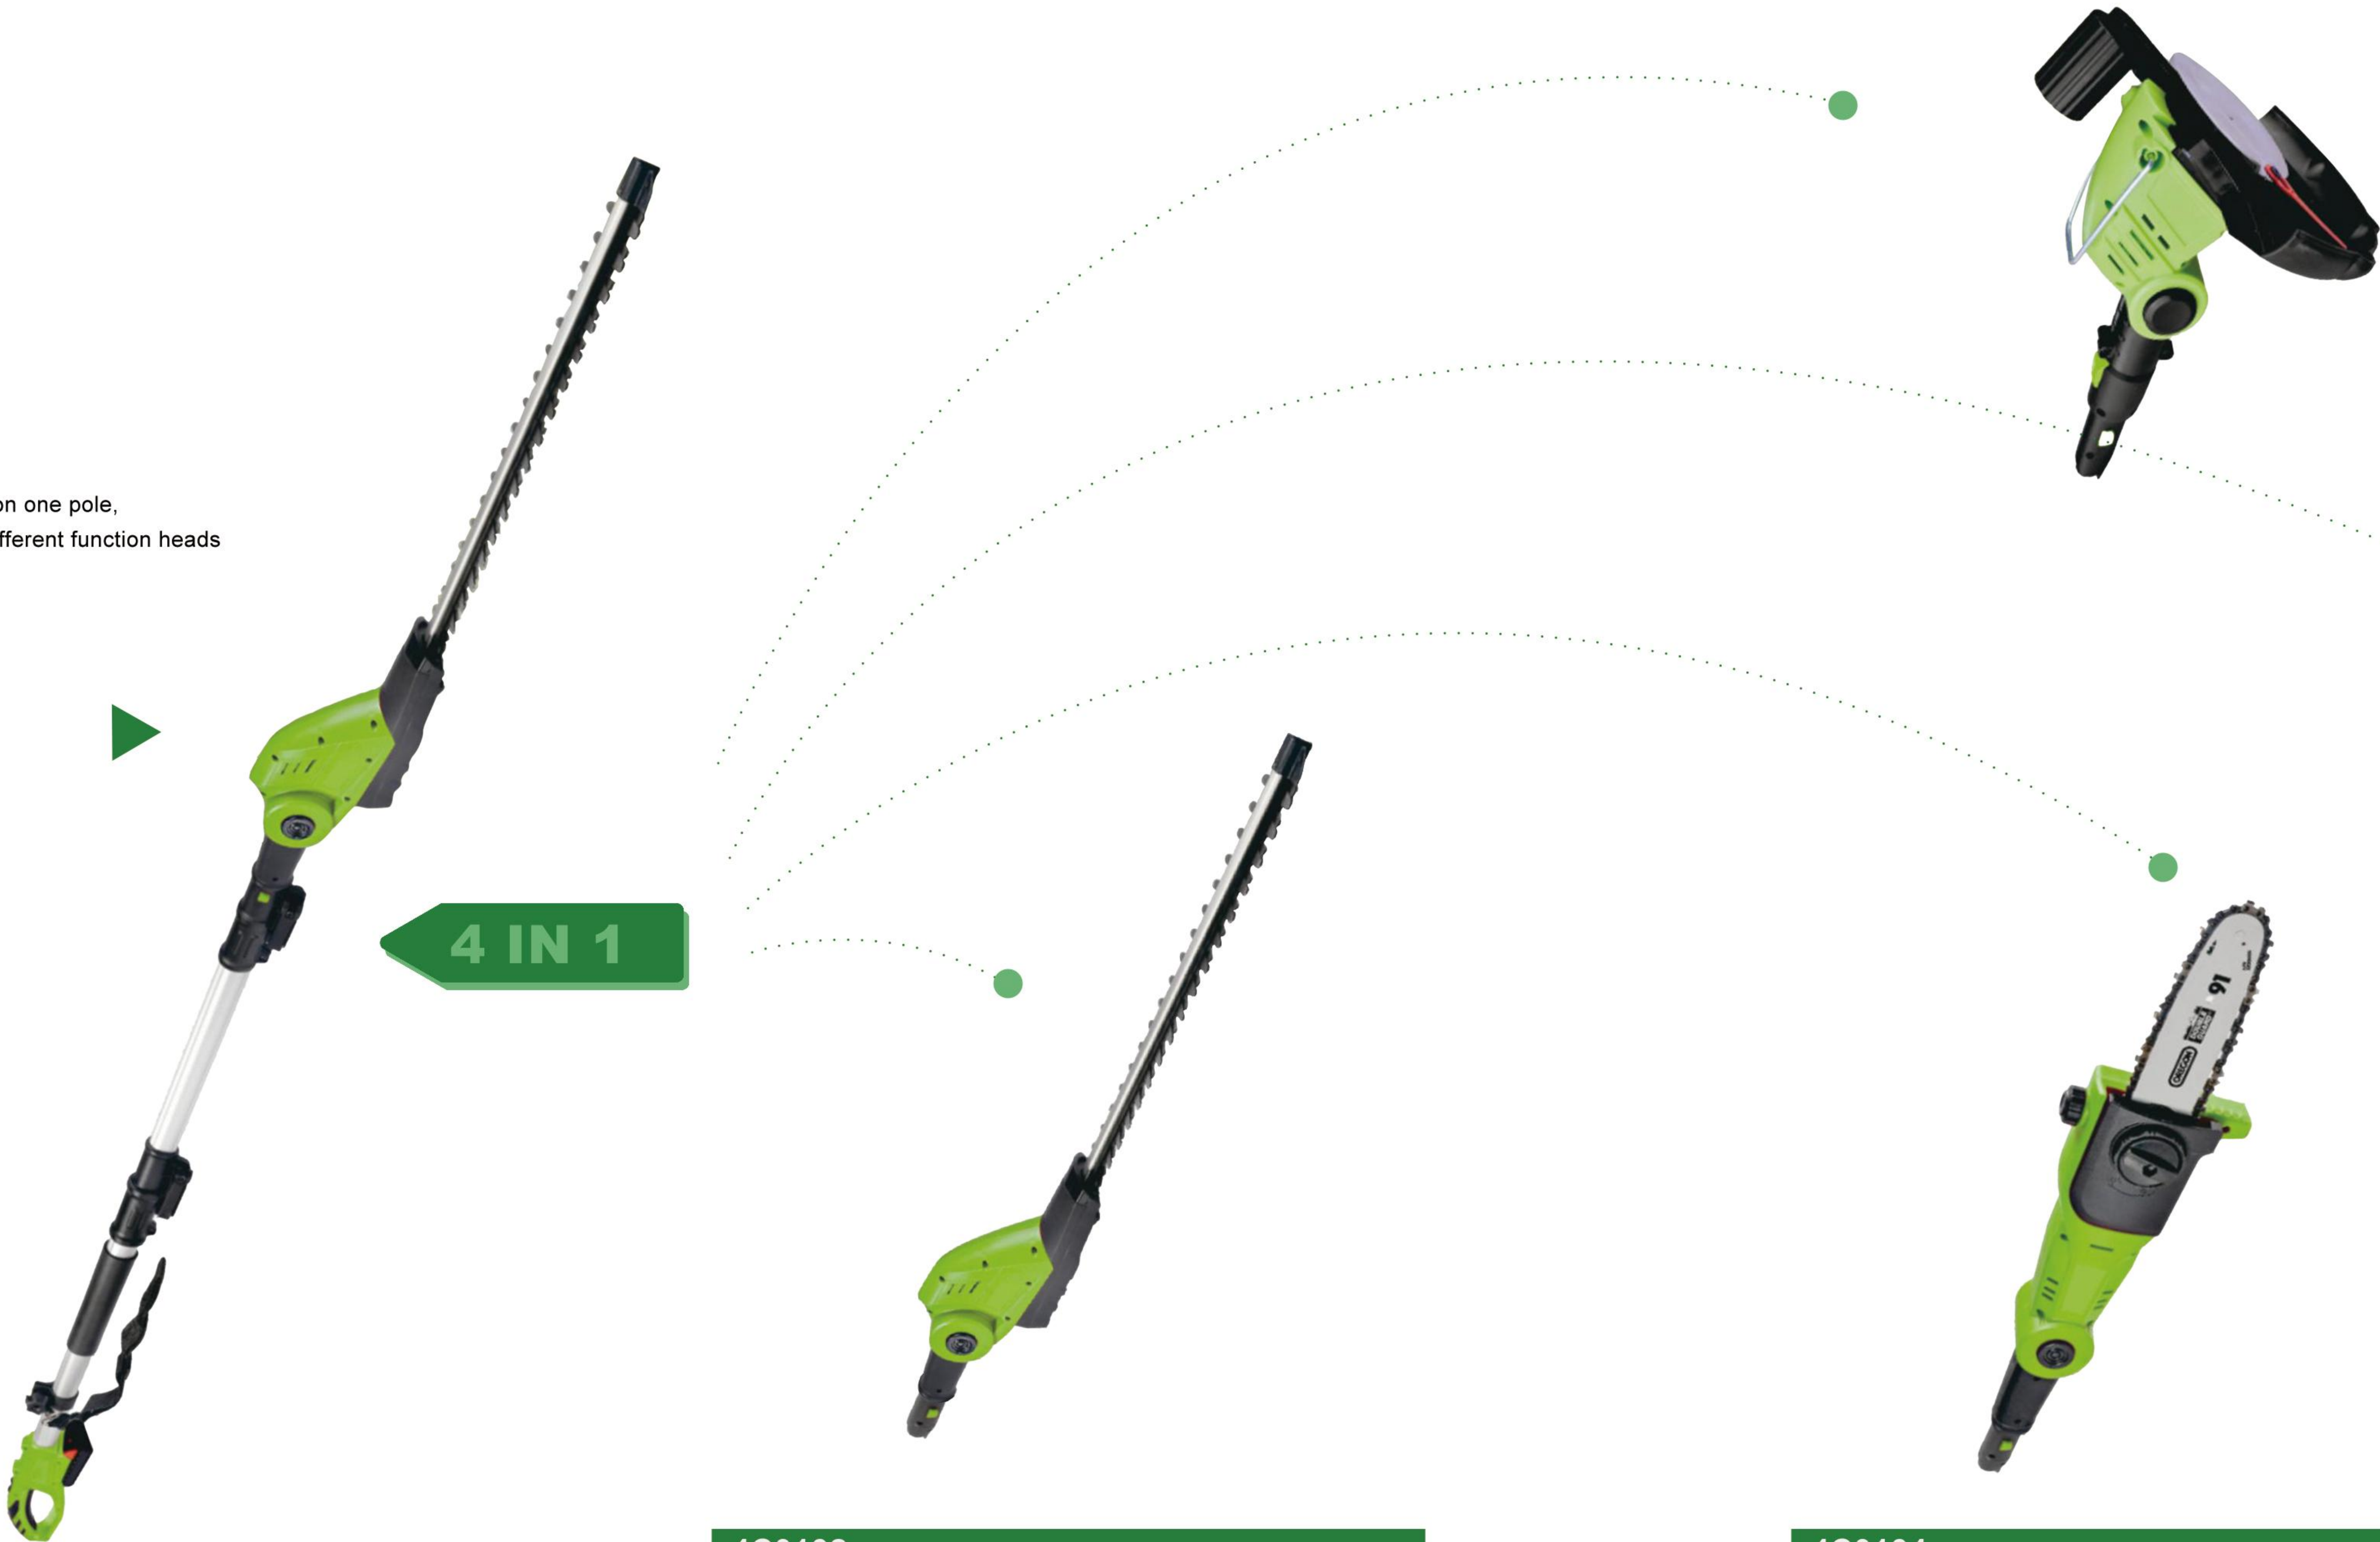

4C0132	
Battery	18V
Battery Type	Lithium-ion
Charging Time	4h(1h for fat charger)
No-load Speed	1400rpm
Blade Length	450mm(450/510mm)
Cutting Length	15mm
No-load Run Time	55mins(2.0Ah)
Weight	3.6kg
Inner Packing	1155x240x180mm
Qty(20/40/40Hq)	540/1160/1370

4C0133	
Battery	18V
Battery Type	Lithium-ion
Charging Time	4h(1h for fat charger)
No-load Speed	5.5m/s
Blade Length	Oregon 8"
Cutting Length	180mm
No-load Run Time	35mins(2.0Ah)
Weight	3.3kg
Inner Packing	1155x240x180mm
Qty(20/40/40Hq)	540/1160/1370

4C0134	
Battery	18V
Battery Type	Lithium-ion
Charging Time	4h(1h for fat charger)
No-load Speed	8500rpm
Blade Length	250mm(230/240/250/260mm)Cutting width
Cutting Length	320mm(890-1210mm)
No-load Run Time	55mins(2.0Ah)
Weight	2.06kg
Inner Packing	1155x240x180mm
Qty(20/40/40Hq)	540/1160/1370

4C0135	
Battery	18V
Battery Type	Lithium-ion
Charging Time	4h(1h for fat charger)
No-load Speed	200km/h
Blade Length	
Cutting Length	
No-load Run Time	15mins(2.0Ah)
Weight	2.0kg
Inner Packing	1155x240x180mm
Qty(20/40/40Hq)	540/1160/1370

SCARIFIER



4C0136	
DC Voltage	18V
No load speed	270/min
blade width	115mm/220mm
blade diameter	160mm
Running time	30mins
Weight	3.5KG

PRUNING & LAWNMOWER



4C0137	
DC Voltage	18V
Battery	1500mAh
No load speed	1150spm
CuttingLength	180MM
Cutting width	100MM
Charging time	4hours
Running time	70mins
Weight	2.2KG

HIGH BRANCH
RECIPROCATING SAW



4C0138	
DC Voltage	18V
Battery	1500mAh
No load speed	2700spm
Stroke length	20mm
Paw width	60mm
Cutting width	blade for wood 800mm
Cutting width	blade for metal 10mm
No load running time	40mins
Weight	1.6KG

SPRAYER



4C0139	
Voltage	18V
Current	2A
Water Capacity	16L
Flow	16.5m/s
Sprayer Pole	55-101cm
Packing Size	41*24*58cm
Qty(20/40/40HQ)	500/1050/1200

ROBOT LAWN
MOWER



CONTINUOUS WORK DOES
NOT TURN OFF



4C0140	
Battery Voltage	18V
Battery Capacity	2.0Ah (Pluggable Battery)
Max.Self-driving Motor Rated Power	20W
Max. Cutting Motor Rated Power	50W
Cutting Diameter	180/200mm
Manual Cutting Height Setting Through Rotary Knob	
Cutting Height	20-60mm
Highest Rmp Of Motor During Cutting	3100rpm
Self-driving Speed	0.3m/s
Rear Wheel Size	220mm(8-1/2")
Front Wheel Size	80mm(3.5")(universal wheel)
Max. Cutting Slope	45%(25°)
Maximum Slope Of Boundary	5.7°(10%)
Smartphone APP Control	IOS or Android



18V

BATTERY

4C0001a



4.0AH

4C0001b



2.0AH

■ The battery is suitable for any of the following machines

QUICK CHARGER

Input Voltage 100-240V 50/60HZ
Output Voltage 14.4-18V



4C0001e

Input Voltage 100-240V 50/60HZ
Output Voltage 14.4-18V



4C0001f

Input Voltage 100-240V 50/60HZ
Output Voltage 14.4-18V



4C0001g

POWER CHARGER

4C0001c



4C0001d



CHARGE TIME:

Charges 3.0Ah battery in 30minutes
Charges 4.0Ah battery in 40minutes
Charges 5.0Ah battery in 45minutes
Charges 6.0Ah battery in 55minutes

CHARGE TWO BATTERIES AT THE SAME TIME:

Charges 3.0Ah battery in 22minutes
Charges 4.0Ah battery in 36minutes
Charges 5.0Ah battery in 45minutes
Charges 6.0Ah battery in 55minutes

CHARGE FOUR BATTERIES AT THE SAME TIME:

Charges 1.5Ah battery in 30minutes
Charges 2.0Ah battery in 40minutes
Charges 3.0Ah battery in 60minutes
Charges 4.0Ah battery in 80minutes

36V BATTERY POWER TOOLS

36V**BATTERY
POWER TOOLS**

36V

BATTERY
POWER TOOLS

Chain Saw	1D0001
Rated Voltage	36V
Battery Capacity	2.0-5.0Ah
Working Speed	6000/8000r/min
Bar Length	14"/16"
Auto Lubricate	Yes
Double Safety Brake	Yes
Chain Speed	12/15m/s
Chain Tension	SDS
Brake Time	<0.12s
Cutting Length	340/395mm
Quantity Per Color Box	1PC
Color Box Size	45.5x22x25.5cm



Blower	1D0002
Rated Voltage	36V
Battery Capacity	2.0-5.0Ah
No-load Speed	23000r/min
Max Air Speed	56m/s
Max Wind Capacity	820m³/h
Package	color box
Quantity Per Color Box	1pc
N.W./G.W.	2.2/4kg
Color Box Size	63.5x18x29cm



Blower&Vacuum	1D0003
Rated Voltage	36V
Battery Capacity	2.0-5.0Ah
No-load Speed	16300r/min
Max Air Speed	270km/h
Max Wind Capacity	550m³/h(330CFM)
Package	color box
Quantity Per Color Box	1pc
N.W./G.W.	3.5/4.5kg
Color Box Size	47x28x36cm



36V

BATTERY
POWER TOOLS

Lawn Mower	1D0004
Rated Voltage	36V
Battery Capacity	4.0Ah
No-load Speed	3300r/min
Max Cutting Length	430mm
Cutting Height	6 settings
Front/ Rear Wheel	7"/10"
Grass Box Volume	50L
Mulching Function	yes
Quantity Per Carton	1pc
N.W./G.W.	13.5/16.5kg
Carton Size	80.4x48.4x40cm



Lawn Mower	1D0005
Rated Voltage	36V
Battery Capacity	4.0Ah
No-load Speed	3300r/min
Max Cutting Length	370mm
Cutting Height	6 settings
Front/ Rear Wheel	6"/8"
Grass Box Volume	35L
Mulching Function	yes
Quantity Per Carton	1pc
N.W./G.W.	12.5/15.5kg
Carton Size	70.5x43.5x38cm



58V

BATTERY
POWER TOOLS

58V

BATTERY
POWER TOOLS



1E0001
LAWN MOWER

Steel Deck	19 inch
Height Adjustment	25-75mm
Wheel Size (front/rear)	7 inch / 10 inch
20GP / 40GP / 40HQ	120 / 289 / 305
/	/



1E0002
LAWN MOWER

Steel Deck	21 inch
Height Adjustment	25-75mm
Wheel Size (front/rear)	7 inch / 10 inch
20GP / 40GP / 40HQ	96 / 204 / 255
/	/



1E0003
CORDLESS SNOW THROWER

Voltage	100V,5Ah
Working Width	53 cm
Throwing Distance	9 m
Working Depth	30 cm
Carton Size	90*60*50 cm/ 1 pc
G.W/N.W	30/31 kg
20GP/40GP/40HQ	84 / 180 / 225



1E0004
LINE TRIMMER

Cutting Capacity	12 in
20GP/40GP/40HQ	522 / 1044 / 1276
/	/

58V

BATTERY
POWER TOOLS



1E0005
BRUSHLESSLINE TRIMMER/BRUSH CUTTER-2 IN 1

Cutting Width	300mm
20GP / 40GP / 40HQ	780 / 1586 / 1708
/	/



1E0006
BRUSHLESS CHAIN SAW

Chain Speed	13 m/s
20GP / 40GP / 40HQ	1053 / 2115 / 2350
/	/



1E0007
POLE SAW BRUSHED

Chain Speed	7 m/s
Cutting Height	8 feet
20GP / 40GP / 40HQ	600 / 1200 / 1400



1E0008
HEDGE TRIMMER BRUSHED

Cutting Length	600mm
Cutting Capacity	28 mm
20GP / 40GP / 40HQ	440 / 880 / 968



1E0009
BRUSHLESS JET BLOWER

20GP/40GP/40HQ	660 / 1326 / 1547
/	/
/	/

10 ELECTRIC GARDEN MACHINE

DC GARDEN MACHINE



620001
CORDLESS CHAIN SAW

Battery Voltage	16.8V
Capacity	1.5Ah
Charge Time	1.5h
Chain	1/4
Chain Speed	8m/s
Bar Length	4inch
Rate of Vibration	5.5m²/s
Net Weight	1.5kg



520005
CORDLESS GARDEN PRUNER

Voltage	Lithium ,36.8V / 4.4Ah
Cutting Diameter	45mm
Carton Size	56*39*39cm / 2pcs
G.W/N.W	19/17.6 kg
20GP / 40GP / 40HQ	657 / 1361 / 1596



520009
CORDLESS GARDEN PRUNER

Battery	/
Charging Time	/
Max cutting capacity	/
G.W / N.W	/
Carton Size	/

DC

GARDEN MACHINE



420004
CORDLESS GRASS SHEAR

Voltage	10.8V1.3Ah
Charging Time	4 H
Working Width	160 mm
Working Length	220 mm
Carton Size	76*26.5*53.5cm / 8 pcs
G.W / N.W	16 / 15 kg
20GP / 40GP / 40HQ	2080 / 4320 / 5080



420001
CORDLESS GRASS SHEAR

Voltage	7.2V
Cutting Length/Width	170 / 100 mm
Running Time	35-40 mins
Carton Size	76*26.5*57cm / 8 pcs
G.W/N.W	17 / 18 kg
20GP / 40GP / 40HQ	2080 / 4320 / 5080
/	/

POWER SAVING
15%
Save Energy Tool



820010
CORDLESS LEAF BLOWER

Voltage	18V Li-battery
Wind volume	2.8m³/min
Carton Size	50*44*62cm / 4 pcs
G.W / N.W	16.6 / 15.6 kg
20GP / 40GP / 40HQ	696 / 1468 / 1728



620002
CORDLESS CHAIN SAW

Motor	Brushless
Battery Pack	Dual 20V series connection
Battery Capacity	3AH/4AH
Start-Up	Slow Start within 1.5 second
Brake Time	Switch≤1.5s,Protecting board≤0.15s
Rotating Speed	8600rpm
Chain Speed	16m/s
Chain Tensioning	Tool Free SDS
Cutting Length	355mm/400mm
Tool Weight(with bar set)	5.6kgs
Oil Feeding Speed	5.7L/min
Charging Specification	21.5V/2A
Cutting Efficiency	Up to 110 cuts per charge (On 120mm Diameter Log)
Loading Qty	982/2074/2472pcs



DC

ROBOT LAWN MOWER




140010	RMA300M	RMA500M	RMA800M	RMA1000M
Suitable for area up to sqm	300 sqm	500 sqm	800 sqm	1000 sqm
Cutting height min/max in mm	20-60 mm	20-60 mm	20-60 mm	20-60 mm
Cutting width	18 cm	18 cm	18 cm	18 cm
Float cutting	✓	✓	✓	✓
Bump sensor+buffer cover	✓	✓	✓	✓
APP /Wifi/Bluetooth	-	✓	✓	✓
User interface	keypad display	APP & keypad display	APP & keypad display	APP & keypad display
FOTA	-	✓	✓	✓
Multi-zones start points	2 points	4 points	4 points	4 points
Working schedule (settled in APP)	keypad setting	1 period	2 periods	2 periods
Max slope	20°/ 36%	20°/ 36%	20°/ 36%	20°/ 36%
Water wash	☒	✓	✓	✓
Water-proof (machine)	IPX5	IPX5	IPX5	IPX5
Water-proof (charger)	IP67	IP67	IP67	IP67
Battery type	20 V Lithium 2.5 Ah	20 V Lithium 2.5 Ah	20 V Lithium 5.0 Ah	20 V Lithium 5.0 Ah
Charger output	1.1 A	1.1 A	3.0 A	3.0 A
Charging time	2.2 h	2.2 h	1.6 h	1.6 h
Mowing time per charge cycle	2 h	2 h	3.2 h	3.2 h
Sound power level	55 dB (A)	55 dB (A)	55 dB (A)	55 dB (A)
PIN code PIN	✓	✓	✓	✓
Lift & Tilt sensor	✓	✓	✓	✓
Rain sensor	✓	✓	✓	✓
Eco mode	✓	✓	✓	✓
Robot dimensions	55*36*23 cm	55*36*23 cm	55*36*23 cm	55*36*23 cm
Certificates	CE,RED,NB,LVD	CE,RED,NB,LVD	CE,RED,NB,LVD	CE,RED,NB,LVD
Net weight	7.4 kgs	7.4 kgs	7.7 kgs	7.7 kgs

DC

ROBOT LAWN MOWER

- One time setting for permanent enjoyment
- Green energy and environment friendly
- Customized experience via smart app
- Continuous optimizable design

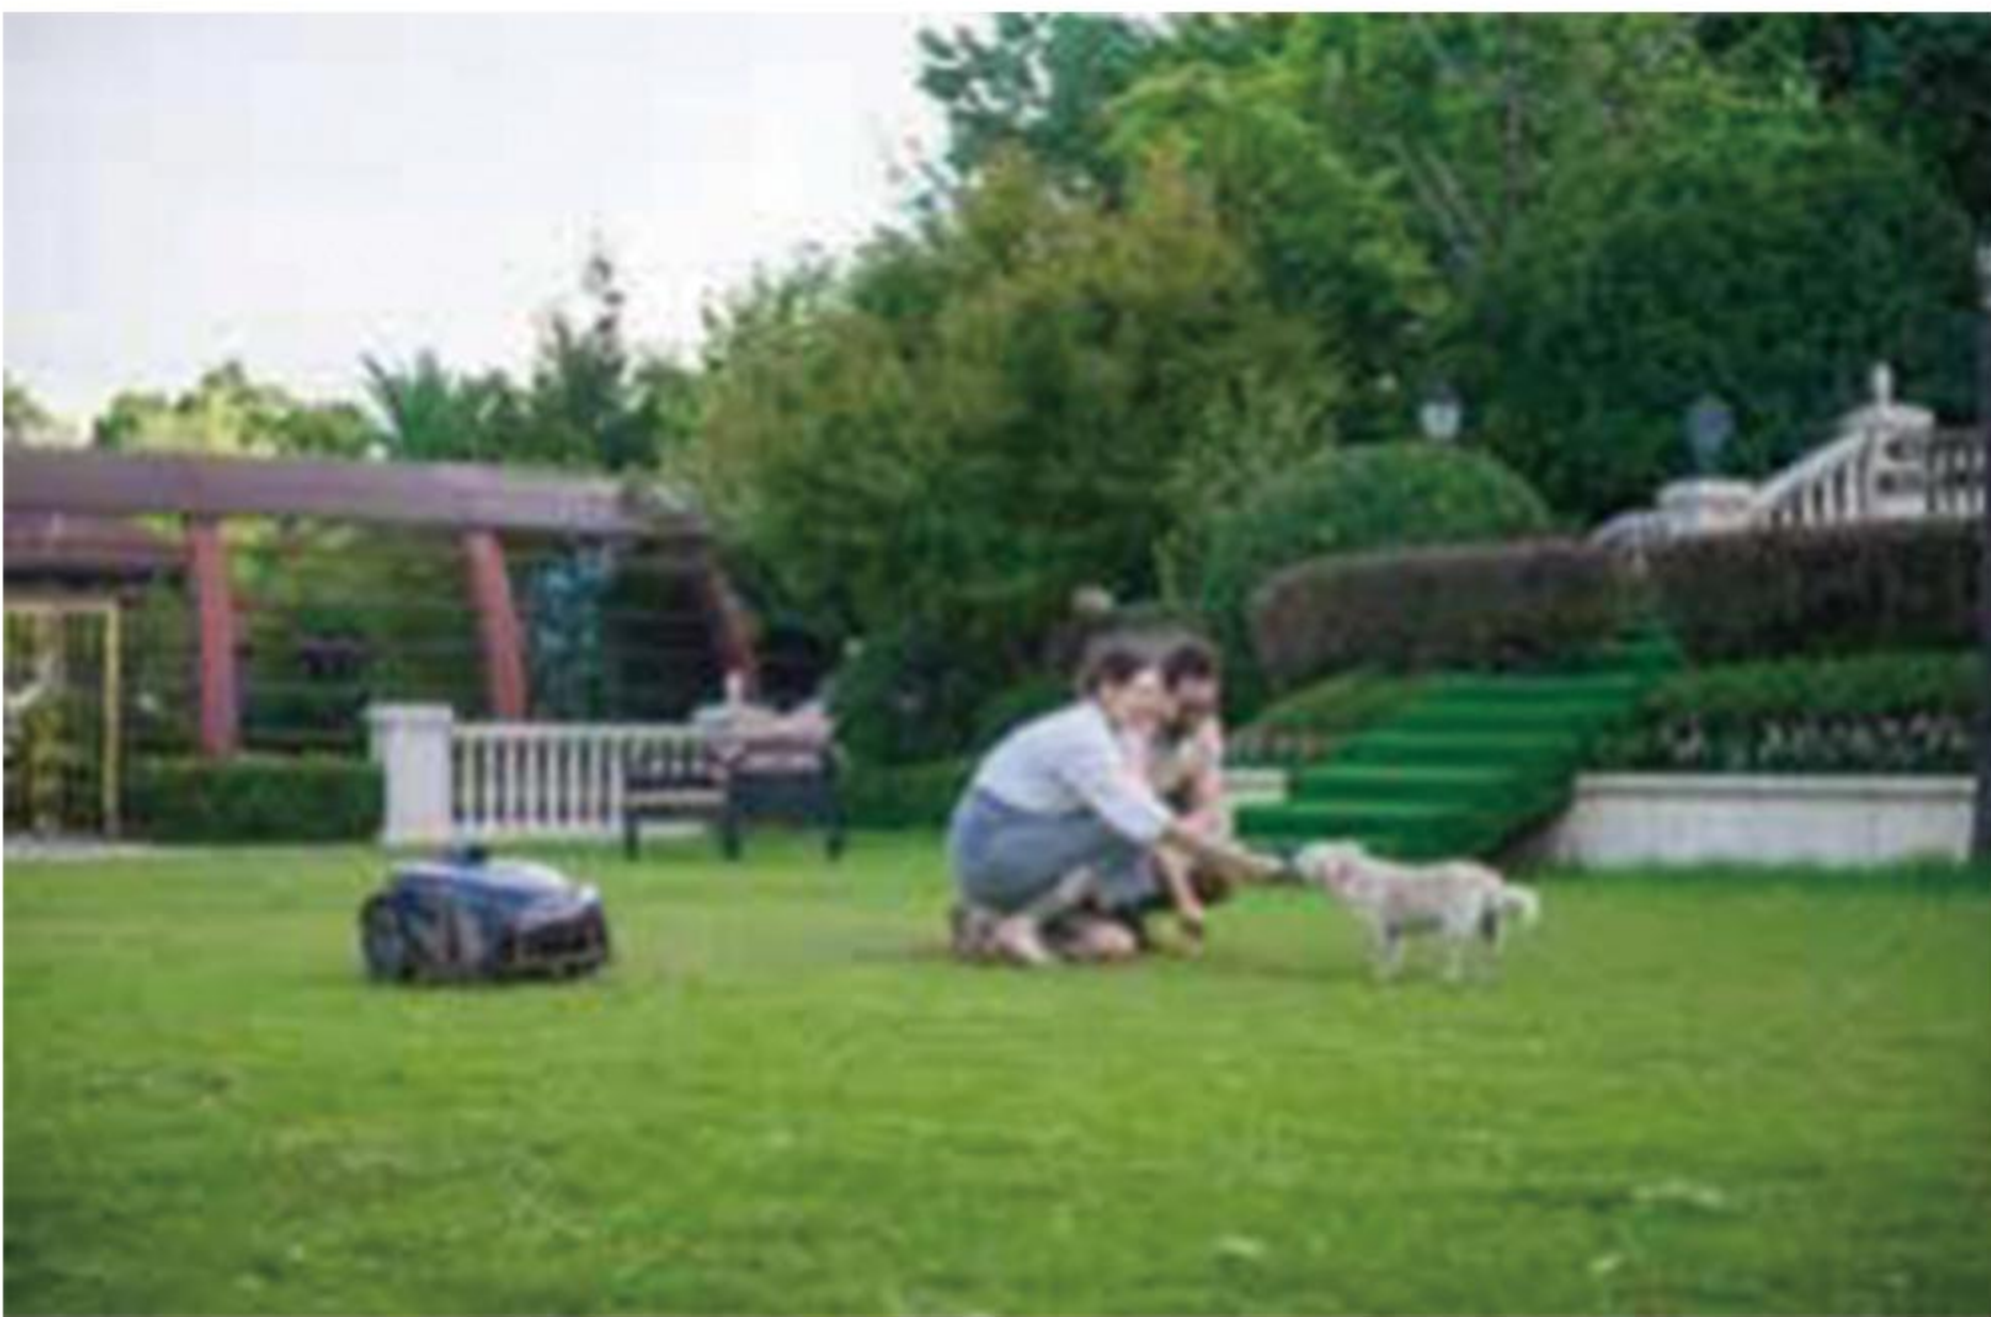


140017

Product model	M28E
Rear wheel size	9.5inch
Front wheel size	3.5inch
Machine size	673*502*382.5mm
Cutting width	11inch
Range of cutting height	30-85mm
Cutting height adjustment type	Electric
Battery capacity	18V 8.8AH
Climbing ability	35%
Q'ty of blade	4
Charging time	60min
Working time	150min
Suggested lawn size	2000 m²
Charging voltage	100-240V 50/60Hz
Mowing efficiency	400 m²/h
Water proof level	IPX5
Boundary wire	NO
Parallel Navigation	YES
Washable or not	YES
Blue Tooth connectivity	YES
4G connectivity	YES
Wi-Fi connectivity	YES
Anti theft	YES
Lift sensor	YES
Laser radar detection	YES



DC
ROBOT LAWN
TRACTOR

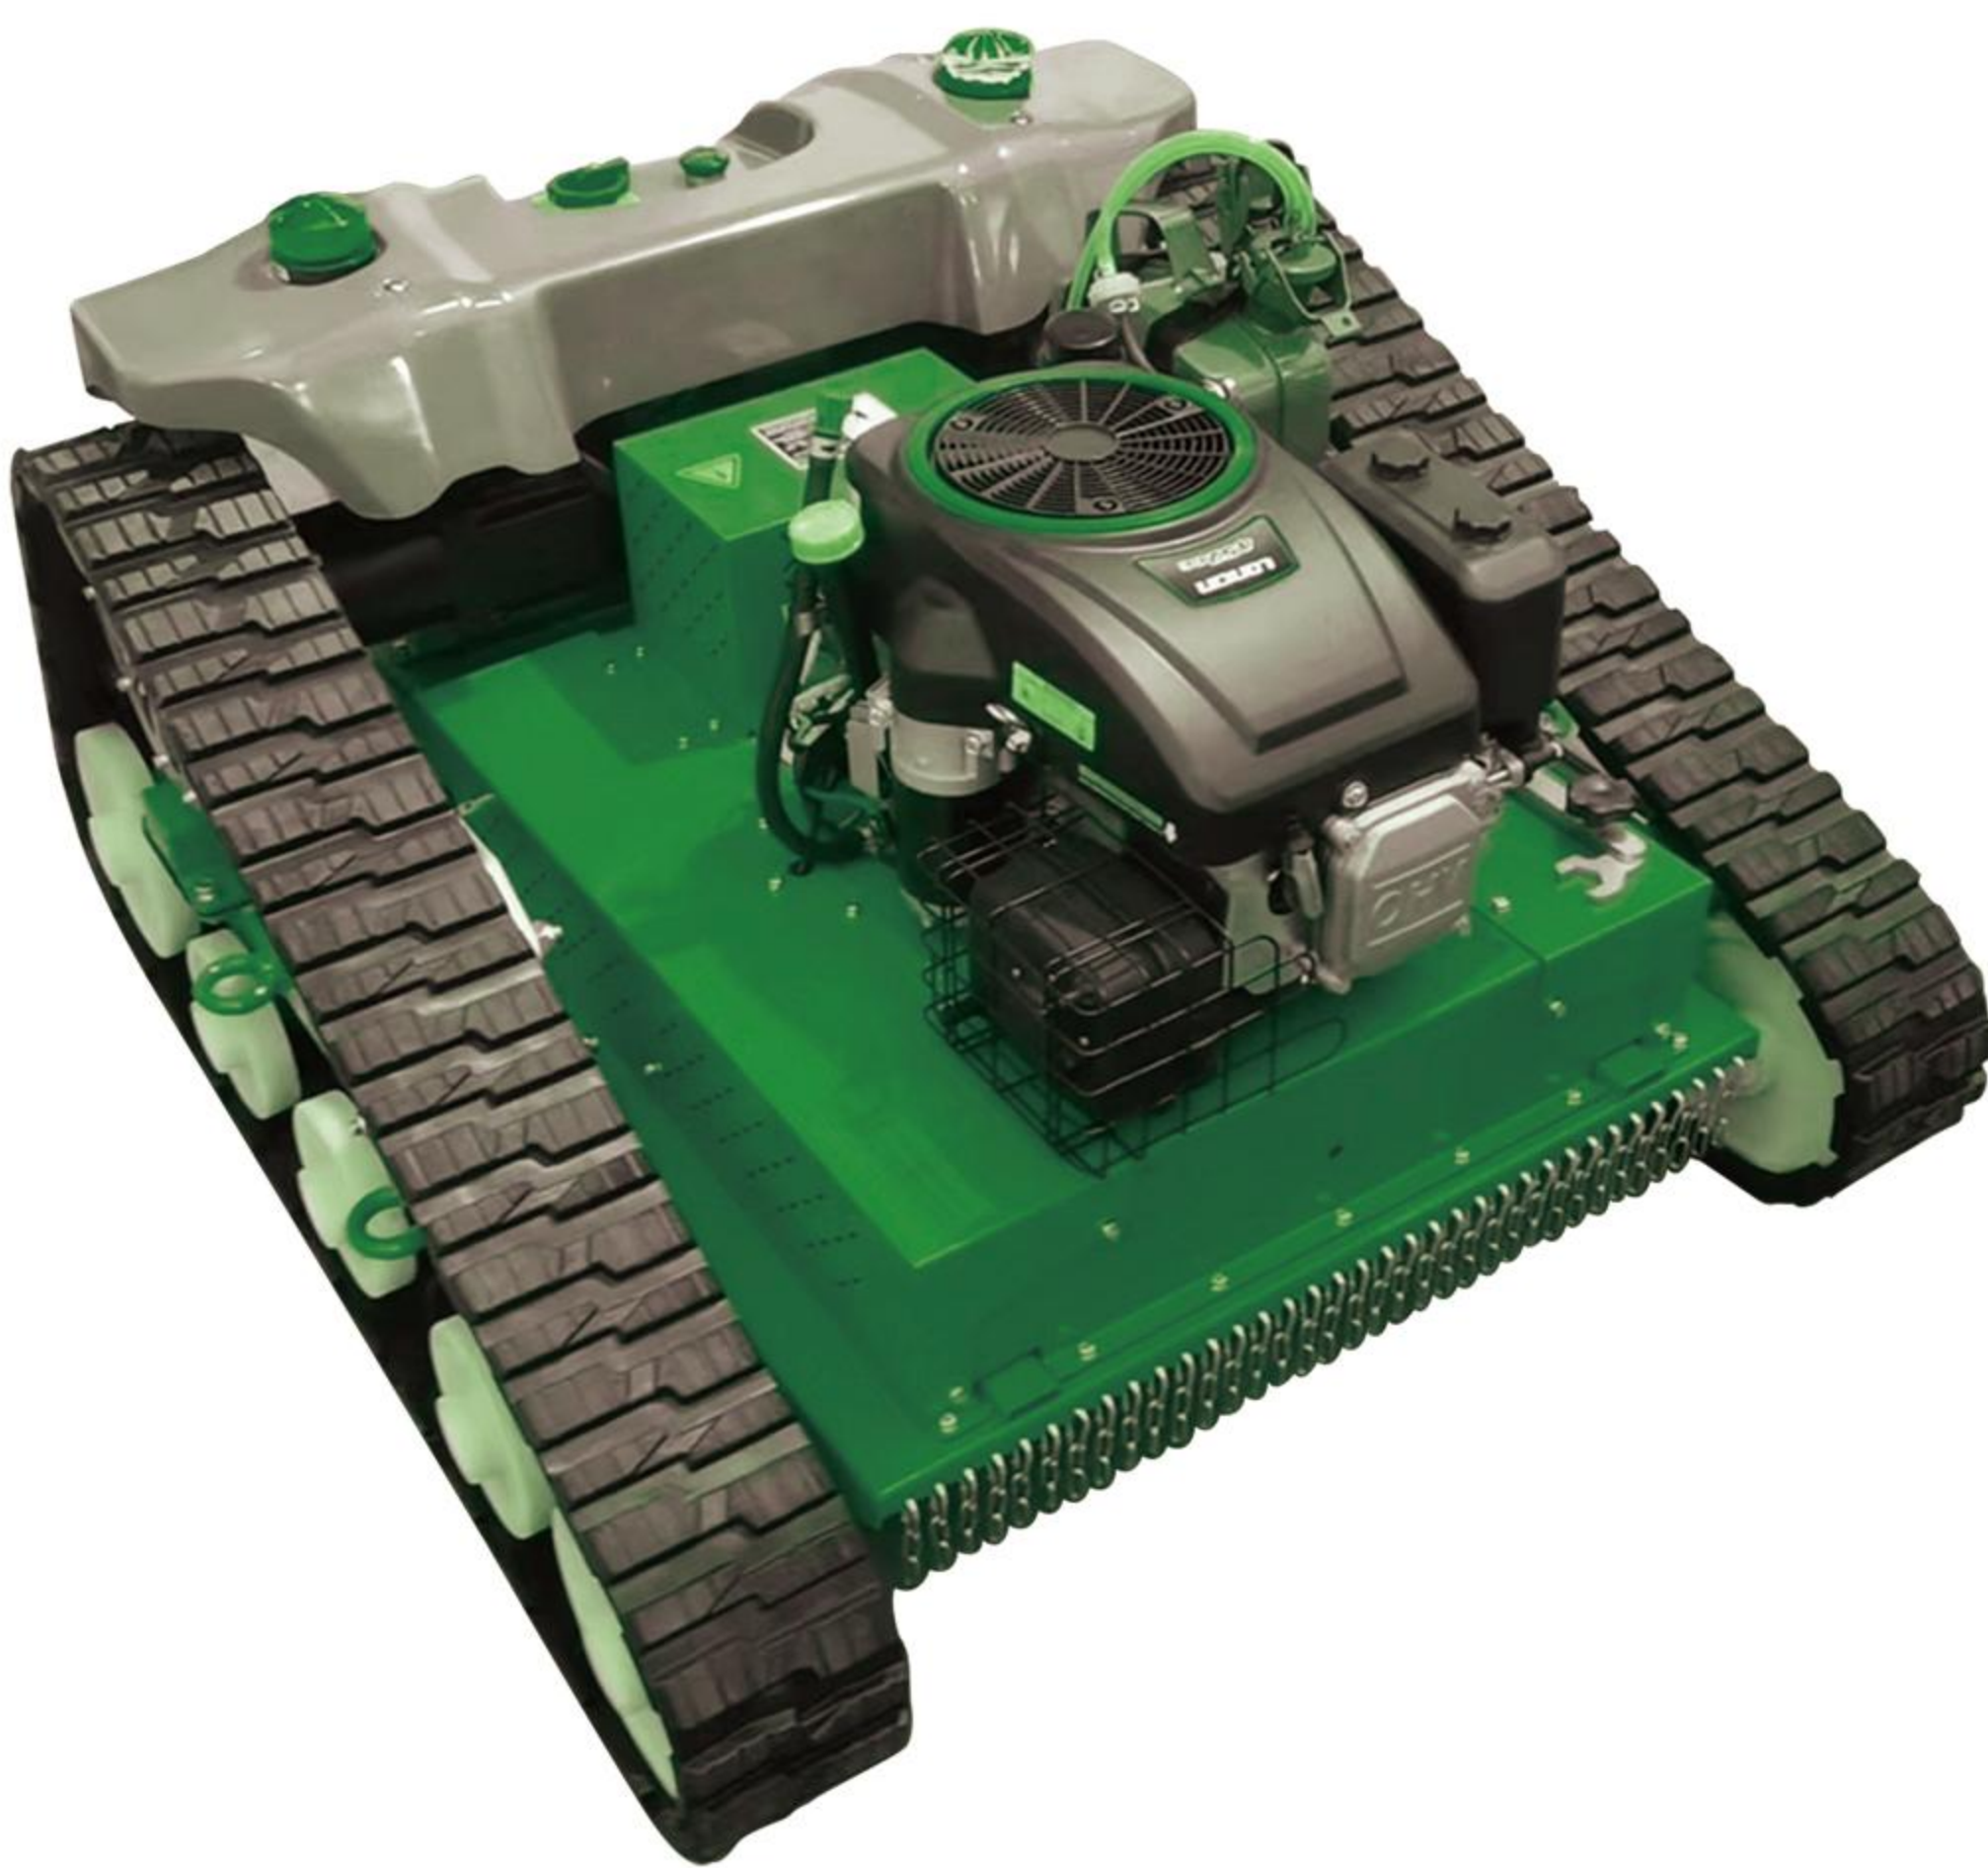

140014	
Input	100-240V, 50~60Hz, 1.2A 120VA
Battery	24V, 4.4Ah Li-ion battery
Charging Time 2A	2.5 hours
Working Time	1.5 hours
Max. Cutting Cover Area	1000m²
Gradeability	≤20°
Cutting Width	20cm
Cutting Height	2.5-5.5cm

DC
ROBOT LAWN
TRACTOR



140015	
Max Cutting Height	4IN
Min Cutting Height	1in
Power	1200W
Feature	Cordless
Power Source	Battery

DC

ROBOT LAWN
TRACTOR



140016	
Max Cutting Height	4IN
Min Cutting Height	1in
Power	1200W
Feature	Cordless
Power Source	Battery

GASOLINE

RIDING LAWN
TRACTOR



160001	
Displacement	500cc
Horsepower	17.5HP
Oil Capacity	48fl.oz
Transmission Type	Hydro-Gear
Cutting Width	1016mm
Height Adjustment	30-90mm
Catcher Volume	300L
Packaging Size	198*110*87cm
Overall Weight	240kg
40HQ	36sets

GASOLINE

RIDING MOWER
TRACTOR



160005		160005-1	
Engine	Kawasaki FR691V/Loncin 2P77F	Kawasaki FR691V/Loncin 2P77F	
Displacement	726cc/708cc	726cc/708cc	
Transmission	Hydro-Gear EZT	Hydro-Gear ZT-2800	
Starter	Eletric	Eletric	
Cutting Width	117cm/46"	127cm/50"	
Cutting Heigh Range	1.5"-4.5"(38-114mm)	1.5"-4.5"(38-114mm)	
Forward Speed	0-11km/h	0-12.4km/h	
Reverse Speed	0-5.5km/h	0-5.5km/h	
Cutting Blades	3	3	
Tires-Front	11"x4"-5"	13"x5"-6"	
Tires-Rear	18"x9.5"-8"	20"x10"-8"	
Fuel Capacity	15L	15L	
LED Head Light	standard	standard	
ROPS	standard	standard	
Package Dimensions(LxWxH)	2006x1280x864mm	2006x1280x864mm	
Net Weight(kg)	255kg	270kg	
Container load(20GP/40GP/40HQ)	8/18/27pcs	8/16/24pcs	
Certification	CE	CE	

- Professional Engine
- Visible Console Panel
- Reinforced And Fabricated Deck
- Unique Cutting Height Adjustment
- Dual LED Headlights



GASOLINE

RIDING MOWER
TRACTOR



160002	
Cutting Width:	660mm
Engine manufacturer	Loncin
Engine model	1P75F
engine power info (cc/kw/rpm)	224cc/4.5kw/2800rpm
Fuel tank volume (l)	2
Oil volume (l)	0.5
Grass catcher:	150L
Cutting height (mm)	30-75mm/ 6 positions
Cutting method	Collecting, Side discharge,Mulching
Drive system	5 forward gears / 1 backward gear
wheel size (inches)	13'/15'
Packing size	1520*770*840
Loading Qty	36 / 72 / 72 pcs



GASOLINE

RIDING MOWER
TRACTOR

Starting System
Recoil/ES/Auto choke



160004

Net Weight (kg)	115±2KG
Gross Weight (kg)	125±2KG
Assembled Length X Height XWidth (mm)	1820*740*1090
Drive Type	Rear-wheel Drive
Turning Radius (in.)	18
Displacement (cc)	224cc
Engine Model	DV224
Starting System(Recoil/ES/Auto choke)	Recoil/E-start
Power MAX(kw)	4.4KW
Rated speed	2800 rpm
Forward Speed (km/h)	1.5/2.0/4.0/6.0Km/h
Maximum Reverse Speed ((km/h)	2.4Km/h
Tires	4-ply tubeless
Front Wheel Size (in.)	10*400-4
Rear Wheel Size (in.)	13*500-6
Cutting Width	24"
Number of Blades	1
Blade speed(rpm)	Max 2700
Blade brake	Yes
Catcher capacity(L)	150L
Cutting heights(mm)	35-75mm ±5mm with 5 grades
Height adjustment	Manual
Cutting Options	Mulch, side-discharge,
Battery voltage	20V
Battery capacity	2Ah
Charger voltage (v) and charging current (A)	21.8/0.6
Charger time (h)	4.7 hours
Seat	Adjustable, integrated switch
Iron Stand Size (mm)	1480*760*865



DC

RIDING MOWER
TRACTOR



160003

30 Inch

36 Inch

Size of Yard on Full Charge	1.1acre/48,000sqft	1.5acre/65,000sqft
Start Type	Keyed electric start	Keyed electric start
Motor Type	Brushless	Brushless
Drive Type	Rear-wheel Drive	Rear-wheel Drive
Terrain Type	Climbs 15° slope with 550lb trailer	Climbs 15° slope with 550lb trailer
Transmission Type	Automatic	Automatic
Turning Radius	16-inch	16-inch
Frame	Steel tubing, welded and powder coated	Steel tubing, welded and powder coated
Deck Material	ST14	ST14
Battery Type	Lead Acid	Lead Acid
Battery Amp Hours	50Ah 48 Volt	75Ah 48 Volt
Battery Run Time (min.)	75	100
Charge Time (hours)	8A 12 hours	13A 12 hours
Maximum Forward Speed (mph)	5Mph/8kmh	5Mph/8kmh
Number of Forward Speeds	CVT	CVT
Maximum Reverse Speed (mph)	2Mph/3.2kmh	2Mph/3.2kmh
Number of Reverse Speeds	CVT	CVT
Mowing speed cutting (mph)	5Mph/8kmh	5Mph/8kmh
Cruise control	Yes	Yes
Tires	4-ply tubeless	4-ply tubeless
Tire Material	Rubber	Rubber
Front Wheel Size (in.)	13	13
Rear Wheel Size (in.)	16	16
Deck Width	31"	37"
Cutting Width	30"	36"
Number of Blades	2	2
Functions	Side Discharge/Mulch	Side Discharge/Mulch
Blade brake	Yes	Yes
Number of Deck Wheels	NA	NA
Number of Cutting Heights	7	7
Maximum Cutting Height (in.)	4.5	4.5
Minimum Cutting Height (in.)	1.5	1.5
Height adjustment	Manual	Manual
Cutting Options	Mulch, side-discharge	Mulch, side-discharge

10

DC

ELECTRIC
SPRAYER

POWER SAVING
15%
Same Quality Tool



2220001			
Tank Capacity	15L	20L	25L
Working Pressure	0.15-0.6Mpa	0.15-0.6Mpa	0.15-0.6Mpa
Battery Capacity	12Ah	12Ah	12Ah
Voltage	DC 12V	DC 12V	DC 12V
Weight	9.2kgs	9.2kgs	9.2kgs
Packing Dimension	405*290*590	405*290*640	460*290*615

DC

ELECTRIC
SPRAYER

POWER SAVING
15%
Same Quality Tool



2240001			
Capacity	16L	16L	25L
Battery	12V,8/12AH	12V,8/10/12AH	12V,8/12AH
Pressure	0.2-0.3Mpa	0.2-0.3Mpa	0.2-0.3Mpa
Size	380*250*480	380*250*485	380*200*540

AC POWER

GARDEN MACHINE



110001
ELECTRIC LAWN MOWER

Voltage	230-240V~50HZ
Power	1000 / 1200 W
Cutting Width	32 cm
Cutting Height	2.5 / 4 / 5.5 cm
Collection Box	30 L
Carton Size	30*39*29 cm / 1 pc
G.W/N.W	10 / 8.5 kgs
20GP/40GP/40HQ	410 / 850 / 970
/	/



110110
ELECTRIC LAWN MOWER

Voltage	230-240V~50HZ
Power	1600 W
Cutting Width	38 cm
No - Load Speed	3500 rpm
Cutting Height	20 - 70 mm
Collection Box	45 L
Carton Size	78*48*34 cm
G.W/N.W	16 / 14.5 kgs
20GP/40GP/40HQ	215 / 450 / 550



110003
ELECTRIC LAWN MOWER

Voltage	230-240V~50HZ
Power	1200 W
Cutting Width	32 cm
Cutting Height	2 / 3.8 / 5.6 cm
Collection Box	30 L
Carton Size	69*48.5*37.5cm / 1 pc
20GP/40GP/40HQ	480 / 992 / 1116



110002
ELECTRIC LAWN MOWER

Voltage	230-240V~50HZ
Power	1600 W
Cutting Width	40 cm
No - Load Speed	3200 / min
Cutting Height	2.5-6.5 cm
Collection Box	40 L
Carton Size	76*47*38.5 cm / 1pc
G.W/N.W	15 / 13 kgs
20GP/40GP/40HQ	230 / 463 / 524

AC POWER

GARDEN MACHINE



110007
ELECTRIC LAWN MOWER

Voltage	230-240V~50HZ
Power	1800 W
Cutting Width	40 cm
Working Depth	5(-12/-9/-6/-3/+6) mm
Collection Bag	55 L
Packing Size	60*49.5*36.8 cm
G.W/N.W	14.5 / 12.8 kg
20GP/40GP/40HQ	300 / 626 / 725
/	/



110006
ELECTRIC SCARIFIER

Voltage	230-240V~50HZ
Power	1500 W
Cutting Width	32 cm
Working Depth	4(-12/-8/-4/+4) mm
Collection Bag	30 L
Packing Size	52.5*42.5*30.8 cm
G.W/N.W	9.3 / 10.7 kgs
20GP/40GP/40HQ	399 / 860 / 1000
/	/



110008
ELECTRIC LAWN MOWER

Voltage	230-240V~50HZ
Power	1800 W
Cutting Width	46 cm
Cutting Height	2.5 - 7.5 cm
Collection Box	55 L
G.W/N.W	24.5 / 23 kgs
Packing Size	74*55*33.5 cm / 1 pc
20GP/40GP/40HQ	210 / 441 / 505
/	/



110005
ELECTRIC SCARIFIER

Voltage	230-240V~50HZ
Power	1600 W
Cutting Width	38 cm
Working Depth	5(-12/-9/-6/-3/+6) mm
Collection Bag	45 L
Packing Size	59.5*45*34.5 cm
G.W/N.W	14.5 / 12.8 kgs
20GP/40GP/40HQ	300 / 626 / 725
/	/

AC POWER

GARDEN
MACHINE



210004
GRASS TRIMMER

Voltage	230-240V~50HZ
Power	450/550 W
Cutting Width	30 cm
Carton Size	97*25*46cm / 4 pcs
G.W/N.W	12.6 / 11.6 kgs
20GP/40GP/40HQ	1080 / 2196 / 2440
/	/



210001
ELECTRIC GRASS TRIMMER

Voltage	230-240V~50HZ
Power	250 W
Cutting Width	22 cm
Carton Size	65*39*42cm / 12 pcs
G.W/N.W	19 / 18 kgs
20GP/40GP/40HQ	3060 / 6120 / 7344
/	/



210002
ELECTRIC GRASS TRIMMER

Voltage	230-240V~50HZ
Power	350 W
Cutting Width	25 cm
Carton Size	86.5*45*45cm / 8 pcs
G.W/N.W	19 / 17.6 kgs
20GP/40GP/40HQ	1288 / 2688 / 3208
/	/



210008
ELECTRIC WEED SWEEPER

Voltage	230-240V~50HZ
Power	400 W
Max Brush Diameter	11 cm
Carton Size	96.5*33*46 cm / 6pcs
G.W/N.W	22 / 20.4 kgs
20GP/40GP/40HQ	1152 / 2400 / 2700
/	/

AC POWER

GARDEN
MACHINE



210005
REAR MOTOR GRASS TRIMMER

Voltage	230-240V~50HZ
Power	1000 W
Cutting Size	35 cm
Carton Size	83.5*51*35 cm / 4 pcs
G.W/N.W	24/19.2 kgs
20GP/40GP/40HQ	708 / 1520 / 1760
/	/



210010
ELECTRIC GRASS BURNER

Voltage	230-240V~50HZ
Power	2000 W
2 Temperature Setting	50°C/ 600°C
Packing Size	64*36*49 cm / 16 pcs
G.W/N.W	19 / 18 kgs
20GP/40GP/40HQ	3968 / 8219 / 9637
/	/



210022
REAR MOTOR GRASS TRIMMER

Motor Power	1300W
Electric Voltage	220V-240V
Frequency	50Hz
No-load Speed	6500/min
Cutting Width	35cm
Line Diameter	nylon line 2.0mm*5m
Color Box	205x138x905mm
Carton Box	215x290x915mm
Container Loading(20GP/40GP/40HQ)	1000/2100/2400pcs



210011
ELECTRIC WEED SWEEPER

Voltage	230-240V~50HZ
Power	500 W
No - Load Speed	600-1200 rpm
Carton Size	59.5*29.5*19.5 cm / 1pc
G.W/N.W	4.5/3 kgs
20GP/40GP/40HQ	818 / 1694 / 1986
/	/

AC POWER

GARDEN
MACHINE



310002
ELECTRIC HEDGE TRIMMER

Voltage	230-240V~50HZ
Power	1300 W
Cleaning Width	15-30 mm
Throwing Distance	6 m
Carton Size	80*34*24 cm / 1pc
G.W/N.W	6.5 / 5 kgs
20GP/40GP/40HQ	428 / 864 / 1000



710002
ELECTRIC HEDGE TRIMMER

Voltage	230-240V~50HZ
Power	1300 W
Cleaning Width	15-41 mm
Throwing Distance	6 m
Carton Size	57*49*53 cm / 1pc
G.W/N.W	12 / 10 kgs
20GP/40GP/40HQ	176 / 384 / 456

710004
ELECTRIC HEDGE TRIMMER

Voltage	230-240V~50HZ
Power	1600 / 2000 W
Cleaning Width	25-50 mm
Throwing Distance	9 m
Carton Size	57*52*52 cm / 1pc
G.W/N.W	16/14 kgs
20GP/40GP/40HQ	176 / 352 / 424



AC POWER

GARDEN
MACHINE



810001
ELECTRIC CHAIN SAW

Voltage	230-240V~50HZ
Power	1250 W
Chain Speed	13 m/s
No - Load Speed	7000 /min
Oil Tank Capacity	180 ml
Cable Length	0.35 m
Packing Size	47.5*25.5*37.5 cm



810002
ELECTRIC CHAIN SAW

Voltage	230-240V~50HZ
Power	1800 W
Length of Blade	350 / 400 mm
Chain Speed	13.5 m/s
Engine Oil Tank Capacity	150 ml
Weight	5.5 kgs
20GP/40GP/40HQ	1216 / 2516 / 2800 (SDS:1150 / 2358 / 2758)



810003
ELECTRIC CHAIN SAW

Voltage	230-240V~50HZ
Power	2200 W
Length of Blade	400 mm
Chain Speed	13.5 m/s
Engine Oil Tank Capacity	150 ml
Weight	5.5 kgs
20GP/40GP/40HQ	1150 / 2384 / 2640



810004
ELECTRIC CHAIN SAW

Voltage	230-240V~50HZ
Power	2300 W
Length of Blade	400 mm
Chain Speed	15 m/s
Engine Oil Tank Capacity	150 ml
Weight	4.9 kgs
20GP/40GP/40HQ	1080 / 2250 / 2516

AC POWER

GARDEN
MACHINE



610009	
Voltage/Frequency	230-240V/50HZ
No-load Speed	7400rpm±10%
Chain Speed	15m/s
Power	1600W/1800W/2000W/2200W/2400W/2500W
Cutting Length	406mm/355mm
Chain Adjustment	Tool Free Chain Adjustment
Net Weight	4.95kgs
Approval	GS/EMC/CE
Loading Qty(20'/40'/40'HQ_)	1254/2650/3100pcs



610010	
Voltage/Frequency	230-240V/50HZ
No-load Speed	7400rpm±10%
Chain Speed	15m/s
Power	1600W/1800W/2000W/2200W/2400W/2500W
Cutting Length	406mm/355mm
Chain Adjustment	Manual Adjustment
Net Weight	4.75kgs
Approval	GS/EMC/CE
Loading Qty(20'/40'/40'HQ_)	1350/2850/3300pcs



610011	
Voltage/Frequency	230-240V/50HZ
No-load Speed	7400rpm±10%
Chain Speed	15m/s
Power	1600W/1800W/2000W/2200W/2400W/2500W
Cutting Length	406mm/355mm
Chain Adjustment	Manual Adjustment
Net Weight	4.8kgs
Approval	GS/EMC/CE
Loading Qty(20'/40'/40'HQ_)	1524/3220/3728pcs



610012	
Voltage/Frequency	230-240V/50HZ
No-load Speed	7400rpm±10%
Chain Speed	15m/s
Power	1600W/1800W/2000W/2200W/2400W/2500W
Cutting Length	406mm/355mm
Chain Adjustment	Tool Free Chain Adjustment
Net Weight	4.95kgs
Approval	GS/EMC/CE
Loading Qty(20'/40'/40'HQ_)	1524/3220/3728pcs

AC POWER

GARDEN
MACHINE



610013	
Voltage/Frequency	220-240V/50HZ 120V/60HZ
Rated Power	1600W/1800W/2000W/2200W/2400W/2500W
Cutting Length	355mm/406mm/450mm
Oil Volume	230ml
Chain Speed	15m/s
No-load Speed	7400rpm±10%
Chain Adjustment System	Tool Free Chain Adjustment(SDS)
Net Weight	4.8kgs
Loading Qty(20'/40'/40'HQ_)	1254/2650/3100pcs
Approval	GS/EMC/CE/ETL

AC POWER

GARDEN
MACHINE



710002
ELECTRIC SNOW THROWER

Voltage	230-240V~50HZ
Power	1300 W
Cleaning Width	15-41 mm
Throwing Distance	6 m
Carton Size	57*49*53 cm / 1pc
G.W/N.W	12 / 10 kgs
20GP/40GP/40HQ	176 / 384 / 456



710004
ELECTRIC SNOW THROWER

Voltage	230-240V~50HZ
Power	2300 W
Cleaning Width	500 mm
Working Depth	250 mm
Carton Size	57*50*56.5 cm / 1pc
G.W/N.W	16.2/13.3 kgs
20GP/40GP/40HQ	176/368/424



710001
ELECTRIC SNOW THROWER

Voltage	230-240V~50HZ
Power	1300 W
Cleaning Width	15-30 mm
Throwing Distance	6 m
Carton Size	80*34*24 cm / 1pc
G.W/N.W	6.5 / 5 kgs
20GP/40GP/40HQ	428 / 864 / 1000



AC POWER

GARDEN
MACHINE



810001
ELECTRIC BLOWER

Voltage	230-240V~50HZ
Power	900 W
Speed	300 km/h
Carton Size	39*44*62 cm / 4 pcs
G.W/N.W	12.5/11.5 kgs
20GP/40GP/40HQ	1032 / 2160 / 2536
/	/



810004
ELECTRIC BLOWER VACUUM

Voltage	230-240V~50HZ
Power	2000 W
Speed	270 km/h
Function	blow&suction&shredding
Dust Bag	40 L
Carton Size	44.5*26*28 cm / 1 pc
G.W/N.W	3.9/3.3 kgs
20GP/40GP/40HQ	900 / 1900 / 2150
/	/



810003
ELECTRIC BLOWER VACUUM

Voltage	230-240V~50HZ
Power	2400 / 3000 W
Speed	210km/h
Function	blow&suction&shredding
Dust Bag	35 L
Carton Size	82*19*25 cm / 1pc
G.W/N.W	4.5 / 4 kgs
20GP/40GP/40HQ	750 / 1500 / 1800
/	/



AC POWER

GARDEN
MACHINE



1010001
ELECTRIC TILLER

Voltage	230-240V~50HZ
Power	800 W
No-load Speed(rpm)	400
Working Width	360 mm
Working Depth	220 mm
Blade Length	205 mm
Carton Size	50.5*38.5*30.5 cm
G.W/N.W	7.4/8.65 kgs
20GP/40GP/40HQ	428/950/1050



1010002
ELECTRIC TILLER

Voltage	230-240V~50HZ
Power	1050 W
No-load Speed(rpm)	400
Working Width	360 mm
Working Depth	220 mm
Blade Length	205 mm
Carton Size	50.5*38.5*30.5 cm
G.W/N.W	8.15/9.4 kgs
20GP/40GP/40HQ	428/950/1050



1010004
ELECTRIC TILLER

Voltage	230-240V~50HZ
Power	1500 W
No-load Speed(rpm)	400
Working Width	400 mm
Working Depth	220 mm
Blade Length	205 mm
Carton Size	57.5*41.5*32.2 cm
G.W/N.W	9.85/11.5 kgs
20GP/40GP/40HQ	364/770/880



1010005
HANDHELD ELECTRIC TILLER/CULTIVATOR

Voltage	230-240V~50HZ
Power	300 W
No-load Speed	250 rpm
Working Width	160 mm
Packing Size	118*25.5*22.7 cm
20GP/40GP/40HQ	409 / 849 / 995
/	/

AC POWER

GARDEN
MACHINE



1810001
ELECTRIC CHAIN SAW SHARPENER

Voltage	230-240V~50HZ
Power	85 W
Grind Wheel	104*22.2*3.2 / 4.5 mm
Carton Size	39*27*38 cm / 4 pcs
G.W/N.W	9.6 / 7.6 kgs
20GP/40GP/40HQ	2748 / 5744 / 6744
/	/

1810006
ELECTRIC CHAIN SAW SHARPENER

Voltage	230-240V~50HZ
Power	85 W
Grind Wheel	100*10*3.4 1/4" / 100*10*4.5 3/8"
Carton Size	56.5*28*41.5 cm / 6 pcs
G.W/N.W	13 / 12 kgs
20GP/40GP/40HQ	2580 / 5200 / 6214
/	/



AC POWER

GARDEN
MACHINE



1210004
ELECTRIC SHREDDER

Voltage	230-240V~50HZ
Power	2800 W
Max Cutting Dia	44 mm
Volume of Collection Bag	50 L
Weight	22 kg
20GP/40GP/40HQ	260 / 530 / 625
/	/

AC POWER

GARDEN
MACHINE



1210003
ELECTRIC SHREDDER

Voltage	230-240V~50HZ
Power	2500 W
Max Cutting Dia	40 mm
Volume of Collection Bag	50 L
Weight	16 kg
20GP/40GP/40HQ	280 / 580 / 660
/	/



1210001
ELECTRIC SHREDDER

Voltage	230-240V~50HZ
Power	2000 W
Max Cutting Dia	40 mm
Carton Size	73*32*42 cm / 1 pc
G.W/N.W	14 / 12.5 kgs
20GP/40GP/40HQ	296 / 600 / 660
/	/

GARDEN
MACHINE

Electric Reel Mower 920003

Voltage	40V 2.5Ah
Cutting Height	15-50mm
Cutting Width	40.6cm
Carton Size	63*41*37.5cm/1pc
G.W./N.W.	19/18kgs
20GP/40GP/40HQ	270/540/540



Reel Mower	900001	900004	900002	900007
Cutting Width	12"/13"/14"	12"/13"/14"	12"/13"/14"	12"/13"/14"
Height Adjustment	11-38mm	11-38mm	11-38mm	11-38mm
Carton Size	55*46*23cm/1pc	55*46*23cm/1pc	55*46*23cm/1pc	55*46*23cm/1pc
G.W./N.W.	9.8/8.5kgs	9.8/8.5kgs	9.8/8.5kgs	9.8/8.5kgs
20GP/40GP/40HQ	480/990/1100	480/990/1100	480/990/1100	480/990/1100

GARDEN
MACHINE

Leaf Sweeper 900013

Cutting Width	535mm(21-inch)
Wheel	Front 250mm
Number of Leaf Brush	4pcs
Catcher Volume	103L
Catcher Material	PE
Stepless Speed Regulation	70-120mm
Casing Material	PP+10%GF
Wheel Material	PP
Handle Material	q195(with sponge)



Hand Push Sweeper	1600001	1600002	1600004
Container Capacity	14L	40L	12L
Speed	4kph	4kph	4kph
Area Swept	2800m²/H	/	2800m²/H
Operation Width	700mm	800mm	680mm
Carton Size	/	70*34*88cm/1pc	/
G.W./N.W.	/	14.4/12.3kgs	/
20GP/40GP/40HQ	/	133/270/323	/

11

GASOLINE GARDEN MACHINE

GASOLINE

GARDEN MACHINE

2 STROKE



630001
GASOLINE CHAINSAW

Displacement	25.4cc
Max power	0.9kw / 7000rpm
Idling speed	3000±200rpm
Fuel tank capacity	230ml
Oil tank capacity	160ml
Oil Mixture ratio	25:1
/	/



630002
GASOLINE CHAINSAW

Displacement	37.2cc
Max power	1.2kw / 7000rpm
Idling speed	3000±200rpm
Fuel tank capacity	310ml
Oil tank capacity	210ml
Oil Mixture ratio	25:1
/	/



630003
GASOLINE CHAINSAW

Displacement	45cc	52cc	58cc
Max power	1.7kw / 7000rpm	2.0kw / 7000rpm	2.3kw / 7000rpm
Idling speed	3000±200rpm	3000±200rpm	3000±200rpm
Fuel tank capacity	550ml	550ml	550ml
Oil tank capacity	260ml	260ml	260ml
Oil Mixture ratio	25:1	25:1	25:1
/	/	/	/

Powerful long - lasting
High temperature performance
Particularly suitable for medium
density wood felling.

GASOLINE

GARDEN
MACHINE

2 STROKE



630004
GASOLINE CHAINSAW

Displacement	61.5cc
Max power	2.5kw / 7000rpm
Idling speed	3000±200rpm
Fuel tank capacity	550ml
Oil tank capacity	260ml
Oil Mixture ratio	25:1
/	/



630005
GASOLINE CHAINSAW

Displacement	45cc	52cc	58cc
Max power	1.7kw / 7000rpm	2.0kw / 7000rpm	2.3kw / 7000rpm
Idling speed	3000±200rpm	3000±200rpm	3000±200rpm
Fuel tank capacity	550ml	550ml	550ml
Oil tank capacity	260ml	260ml	260ml
Oil Mixture ratio	25:1	25:1	25:1
/	/	/	/



630006
GASOLINE CHAINSAW

Displacement	45cc	52cc	58cc
Max power	1.7kw / 7000rpm	2.0kw / 7000rpm	2.3kw / 7000rpm
Idling speed	3000±200rpm	3000±200rpm	3000±200rpm
Fuel tank capacity	550ml	550ml	550ml
Oil tank capacity	260ml	260ml	260ml
Oil Mixture ratio	25:1	25:1	25:1
/	/	/	/

Poworful long - lasting,high tempera-
ture performance
Particularly suitable for medium density
wood felling.

GASOLINE

GARDEN
MACHINE

2 STROKE



230009
BRUSH CUTTER

Displacement	41.5cc
Max power	1.5kw / 7000rpm
Idling speed	3000±200rpm
Fuel tank capacity	1000ml
Oil Mixture ratio	25:1



230011
BRUSH CUTTER

Displacement	31cc
Max power	0.7kw / 7000rpm
Idling speed	3000±200rpm
Fuel tank capacity	700ml
4 stroke oil 92# fuel	



230010
BRUSH CUTTER

Displacement	62cc
Max power	2.0kw / 7000rpm
Idling speed	3000±200rpm
Fuel tank capacity	1200ml
Oil Mixture ratio	25:1



230012
BRUSH CUTTER

Displacement	35cc
Max power	0.9kw / 7000rpm
Idling speed	3000±200rpm
Fuel tank capacity	650ml
4 stroke oil 92# fuel	

GASOLINE

GARDEN
MACHINE

2 STROKE



230013
BRUSH CUTTER

Displacement	25.4cc
Max power	0.7kw / 7000rpm
Idling speed	3000±200rpm
Fuel tank capacity	650ml
Oil Mixture ratio	25:1



230014
BRUSH CUTTER

Displacement	25.4cc
Max power	0.7kw / 7000rpm
Idling speed	3000±200rpm
Fuel tank capacity	650ml
Oil Mixture ratio	25:1



230015
BRUSH CUTTER

Displacement	32.6cc
Max power	0.9kw / 7000rpm
Idling speed	3000±200rpm
Fuel tank capacity	1000ml
Oil Mixture ratio	25:1



230016
BRUSH CUTTER

Displacement	32.6cc
Max power	0.9kw / 7000rpm
Idling speed	3000±200rpm
Fuel tank capacity	1000ml
Oil Mixture ratio	25:1

GASOLINE

GARDEN
MACHINE

2 STROKE



230017
BRUSH CUTTER

Displacement	40.2cc
Max power	1.4kw / 6500-7000rpm
Idling speed	3000±200rpm
Fuel tank capacity	950ml
Oil Mixture ratio	25:1



230018
BRUSH CUTTER

Displacement	42.7cc	52cc
Max power	1.47kw / 6500-7000rpm	1.65kw / 6500-7000rpm
Idling speed	3000±200rpm	3000±200rpm
Fuel tank capacity	1200ml	1200ml
Oil Mixture ratio	25:1	25:1



230019
BRUSH CUTTER

Displacement	40.2cc
Max power	1.4kw / 6500-7000rpm
Idling speed	3000±200rpm
Fuel tank capacity	950ml
Oil Mixture ratio	25:1



230020
BRUSH CUTTER

Displacement	42.7cc	52cc
Max power	1.47kw / 6500-7000rpm	1.65kw / 6500-7000rpm
Idling speed	3000±200rpm	3000±200rpm
Fuel tank capacity	1200ml	1200ml
Oil Mixture ratio	25:1	25:1

GASOLINE

GARDEN
MACHINE

2 STROKE



230021
BRUSH CUTTER

Displacement	42.7cc	52cc
Max power	1.47kw / 6500-7000rpm	1.65kw / 6500-7000rpm
Idling speed	3000±200rpm	3000±200rpm
Fuel tank capacity	1200ml	1200ml
Oil Mixture ratio	25:1	25:1



230022
BRUSH CUTTER

Displacement	42.7cc	52cc
Max power	1.47kw / 6500-7000rpm	1.65kw / 6500-7000rpm
Idling speed	3000±200rpm	3000±200rpm
Fuel tank capacity	1200ml	1200ml
Oil Mixture ratio	25:1	25:1



230023
BRUSH CUTTER

Displacement	42.7cc	52cc
Max power	1.47kw / 6500-7000rpm	1.65kw / 6500-7000rpm
Idling speed	3000±200rpm	3000±200rpm
Fuel tank capacity	1200ml	1200ml
Oil Mixture ratio	25:1	25:1



230024
BRUSH CUTTER

Displacement	42.7cc	52cc
Max power	1.47kw / 6500-7000rpm	1.65kw / 6500-7000rpm
Idling speed	3000±200rpm	3000±200rpm
Fuel tank capacity	1200ml	1200ml
Oil Mixture ratio	25:1	25:1

GASOLINE

GARDEN
MACHINE

2 STROKE



250001
BRUSH CUTTER

Displacement	32.6cc	42.7cc	52cc	31cc	35cc
Max power	0.9kw / 6500rpm	1.47kw / 6500-7000rpm	1.65kw / 6500-7000rpm	0.7kw / 6500-7000rpm	0.9kw / 6500-7000rpm
Idling speed	3000±200rpm	3000±200rpm	3000±200rpm	3000±200rpm	3000±200rpm
Fuel tank capacity	1000ml	1200ml	1200ml	700ml	650ml
Oil Mixture ratio	25:1	25:1	25:1	4 stroke oil 92# fuel	4 stroke oil 92# fuel



GASOLINE

GARDEN
MACHINE

2 STROKE



330001
HEDGE TRIMMER

Displacement	22.5cc
Max power	0.65kw / 6500-7000rpm
Idling speed	3000±200rpm
Fuel tank capacity	500ml
Oil Mixture ratio	25:1



330002
HEDGE TRIMMER

Displacement	22.5cc
Max power	0.65kw / 6500-7000rpm
Idling speed	3000±200rpm
Fuel tank capacity	500ml
Oil Mixture ratio	25:1



GASOLINE

GARDEN
MACHINE

2 STROKE



2030001
GASOLINE WATER PUMP

Displacement	32.6cc	40.2cc
Max power	0.9kw / 6500-7000rpm	1.4kw / 6500-7000rpm
Flow	8m³/h	8m³/h
Suction height	8m	8m
Lift height	30m	30m
Connection system	1 inch	1 inch
Oil Mixture ratio	25:1	25:1



2030002
GASOLINE WATER PUMP

Displacement	35cc	52cc
Max power	0.9kw / 6500-7000rpm	1.65kw / 6500-7000rpm
Flow	8m³/h	8m³/h
Suction height	8m	8m
Lift height	30m	35m
Connection system	1 inch	1 inch
Oil Mixture ratio	4 stroke oil 92# fuel	25:1



GASOLINE

GARDEN
MACHINE

2 STRØKE



230025
GASOLINE MINI TILLER

Displacement	52cc
Max power	1.65kw / 6500-7000rpm
Idling speed	3000±200rpm
Fuel tank capacity	1200ml
Oil Mixture ratio	25:1



1030024
GASOLINE HAND-PUSH BRUSH CUTTER

Displacement	52cc
Max power	1.65kw / 6500-7000rpm
Idling speed	3000±200rpm
Fuel tank capacity	1200ml
Oil Mixture ratio	25:1

GASOLINE

GARDEN
MACHINE

2 STRØKE



EARTH AUGER

	2330001	2330002	2330003	2330004
Displacement	52cc	52cc	52cc	52cc
Max power	1.65kw / 6500-7000rpm	1.65kw / 6500-7000rpm	1.65kw / 6500-7000rpm	1.65kw / 6500-7000rpm
Idling speed	3000±200rpm	3000±200rpm	3000±200rpm	3000±200rpm
Fuel tank capacity	1200ml	1200ml	1200ml	1200ml
Oil Mixture ratio	25:1	25:1	25:1	25:1

GASOLINE

AIR-COOLED
OUTBOARD MOTO



2130001	
Motor Type	Air-cooled Outboard
Specification	2.5HP
Displacement	52cc
Rated Output	6500rpm
Fuel Tank Capacity	1.2L
Propeller Dimension	180mm
Diameter for the tube	28mm
Packing Dimension	108*32*30/13cm
G.W./N.W.	9.6/8.2kgs
360°rotary handle with self-lock	
It can run 42 minutes with a full tank(1.2L)	

2130002	
Motor Type	Air-cooled Outboard
Specification	2.5HP
Displacement	52cc
Rated Output	6500rpm
Fuel Tank Capacity	1.2L
Propeller Dimension	180mm
Diameter for the tube	28mm
Packing Dimension	108*32*30/13cm
G.W./N.W.	9.6/8.2kgs
360°rotary handle with self-lock	
It can run 42 minutes with a full tank(1.2L)	

2130003	
Motor Type	Air-cooled Outboard
Specification	9HP
Displacement	224cc
Rated Output Power	6.6KW
Bore*Stroke	72*55mm
Max.Engine Speed	3600/min
Fuel Tank Capacity	2.2L
Oil Tank Capacity	0.5L
Shaft Length	70cm
Handle Length	46cm
Propeller Diameter	200mm
Start System	manual start
New gearbox, with very fast speed	

GASOLINE

AIR-COOLED
OUTBOARD MOTO



2130004		2130005		2130006		2130007	
Type	Air-cooled Outboard	Type	Jet Type Outboard	Type	Water-Cooled Outboard	Type	Water-Cooled Outboard
Specification	9HP	Specification	3.5HP	Specification	6.0HP	Specification	40HP
Displacement	224cc	Displacement	63cc	Displacement	112cc	Displacement	703cc
Rated Output Power	6.6KW	Rated Output Power	6500rpm	Bore*Stroke	62*46cm	Bore*Stroke	80*70cm
Bore*Stroke	75*50.8mm	Fuel Tank Capacity	1500ml	Max. Output Power	4.41KW/6.0HP	Gear Ratio	2.08(27/13)
Max.Engine Speed	3600/min	Propeller Diameter	80mm	Idling Speed(Neutral)	1450-1550rpm	Max. Range	5500rpm
Fuel Tank Capacity	2.2L	Packing Dimension	86*34*35cm	Full Throttle Operating Range	4000-5000rpm	Max. Output	29.4KW/5000rpm
Oil Tank Capacity	0.5L	G.W./N.W.	10.1/8.4kgs	Transom Plate Height	44cm	Max. Speed	5500rpm
Transom Length	44cm	360°rotary handle with self-lock		Gear Ratio	2.08(27/13)	G.W./N.W.	81/78Kgs
Propeller Diameter	190.5mm	It can run 42 minutes with a full tank(1.2L)		Gear Position	F-N-R		
				Fuell Tank Capacity	1.3L		
				Oil Tank Capacity	0.6L		
				G.W./N.W.	27/24.5Kgs		

GASOLINE
GASOLINE
BLOWER&VACUUM



1
BLOWER



830001	
Engine drive	Air cooling,2-stroke,single cylinder gasoline
Engine Model	1E34FC
Displacement	25.4cc
Engine Power	0.75kw/7500r/min
Carburetor	Diaphragm type
Mixed fuel ratio	25:1
Flow	0.17cbm/s
Outlet speed	68M/S
Fuel tank capacity	400ml
Storage bag capacity	45L

2
VACUUM



GASOLINE
GASOLINE
BLOWER



830002	
Engine drive	Air cooling,2-stroke,single cylinder gasoline
Engine Model	1E51F
Displacement	75.6cc
Engine Power	3.1kw/7000r/min
Carburetor	Diaphragm
Flow	1740cbm/h
Outlet speed	92.2M/S
Igniting mode	No touch
Method of start	Recoil starting
Mixed fuel ratio	25:1

830003	
Engine drive	Air cooling,2-stroke,single cylinder gasoline
Engine Model	1E40F-5B
Displacement	42.7cc
Engine Power	1.25kw/7000r/min
Carburetor	Diaphragm type
Fuel tank capacity	1.3L
Flow	0.2cbm/s
Outlet speed	73M/S
Igniting mode	No touch
Method of start	Recoil starting
Mixed fuel ratio	25:1

GASOLINE

HAIR
DRYER

POWER SAVING

15%

Low Battery Test

72

CONTINUOUS WORK DOES NOT TURN OFF



830004
TECHNICAL KEY DATA

Displacement	25.4cc	42.7cc	42.7cc
Power	0.75kw / 7000rpm	1.25kw / 7000rpm	1.25kw / 7000rpm
Fuel tank capacity	400ml	1300ml	1300ml
Air outlet flow	0.17m³/s	0.22m³/s	0.22m³/s
Air outlet speed	68 m/s	70 m/s	70 m/s
Net weight	4kg	7.3kg	7.6kg
/	/	/	/

TECHNICAL KEY DATA

Displacement	75.6cc	76cc
Power	3.1kw / 7000rpm	2.6kw / 7000rpm
Fuel tank capacity	2300ml	1900ml
Air outlet flow	0.45m³/s	0.4m³/s
Air outlet speed	77 m/s	72 m/s
Net weight	10.5kg	10.6kg
/	/	/

GASOLINE

MIST
DUSTER

POWER SAVING

15%

Low Battery Test

72

CONTINUOUS WORK DOES NOT TURN OFF

The whole machine is made of corrosion-resistant plastic, rubber or aluminum alloy, which prolongs the service life of the machine.

The large-mouth medicine box is convenient for adding liquid medicine, and the pesticides in bags can also be poured directly.



The strap and back pad are made of foam plastic, with little vibration and soft and comfortable carrying.

Using a high-power two-stroke gasoline engine, it is small in size, light in weight and stable in operation.

All-plastic structure, low weight, low center of gravity, good stability.

2260001
TECHNICAL KEY DATA

Displacement	41.5cc	42.7cc
Standard Power	2.13kw / 7500rpm	1.25kw / 6500rpm
Mixed Fuel Ratio	25:1	25:1
Fan Rotation Speed	7500 r/min	6500 r/min
Range	≥12m	≥12m
Tank Capacity	14/20L	14/20L
Net Weight	11/11.5kg	10/10.5kg

GASOLINE

MIST
DUSTER

2260002
TECHNICAL KEY DATA

Tank Capacity	15/20L
Range	≥10m
Power of engine	1.6HP,1.18kw/5000rpm
Discharging Volume	50,3cc
Mixed Fuel Ratio	25:1
N./G. weight	11/12kgs
Dimension	490*415*730



2260003
TECHNICAL KEY DATA

Tank Capacity	12L
Range	≥15m
Power of engine	4.2HP,3KW / 6500rpm
Discharging Volume	77cc
Mixed Fuel Ratio	25 : 1
N.W./G.W.	10.5 / 11.5Kgs
Dimension	690*450*330



GASOLINE

MIST
DUSTER



2260004
TECHNICAL KEY DATA

Tank Capacity	26L	26L	26L	26L
Range	≥12m	≥12m	≥12m	≥12m
Power of engine	0.7kw / 6500rpm	0.9kw / 6500rpm	2.9HP,2.13kw / 7500rpm	1.25kw / 6500rpm
Discharging Volume	31.5cc	37.7cc	41.5cc	42.7cc
Mixed Fuel Ratio	/	25 : 1	25 : 1	25 : 1
N.W./G.W.	11/12Kgs	11/12Kgs	11/12Kgs	11/12Kgs
Dimension	490*415*800	490*415*800	490*415*800	490*415*800

TECHNICAL KEY DATA

Tank Capacity	26L	26L	26L
Range	≥12/15m	≥12m	≥12/17m
Standard Power	1.0kw / 6500rpm	2.13kw / 7500rpm	2.13kw / 6500rpm
Discharging	37.7cc	41.5cc	41.5cc
Mixed Fuel Ratio	/	25 : 1	25 : 1
Fan Rotation Speed	6500 r/min	7500 r/min	7500 r/min
Net Weight	10.5kg	11.5kg	12kg

GASOLINE

MIST
DUSTER



2230001
TECHNICAL KEY DATA

Tank Capacity	20/25L	23/30L	20/25L	25L	25L
Range	≥12m	/	/	/	/
Power of engine	1.2HP,0.7kw/7000rpm	0.7kw/7000rpm	/	/	/
Discharging Volume	25.6cc	31.5cc	31cc	31cc	37.7cc
Weight	10kgs	12kgs	10.5/11kgs	9.5kgs	11.5kgs
Standard Power	/	/	0.7kw / 6500rpm	0.75kw / 7500rpm	1.0kw / 6500rpm
Mixed Fuel Ratio	/	/	/	25:1	/
Work pressure	/	/	1.0-2.5Mpa	1.0-2.5Mpa	1.0-2.5Mpa
Packing Dimension	405*340*610/640	490*395*615	/	/	/

GASOLINE

MIST
DUSTER



2230002
TECHNICAL KEY DATA

Tank Capacity	25L	25L	25L	25L
Power of engine	1.2HP,0.7KW / 7000rpm	0.75KW / 7000rpm	1.2HP,0.7KW / 7000rpm	1.2HP,0.7KW / 7000rpm
Discharging Volume	25.6cc	25.6cc	25.6cc	25.6cc
N.W./G.W.	12Kgs	10Kgs	12Kgs	12Kgs
Dimension	425*385*665	405*330*640	490*330*615	420*330*620

TECHNICAL KEY DATA

Tank Capacity	25L	25L	25L	25L
Power of engine	0.75KW / 7000rpm	1.2HP,0.7KW / 7000rpm	0.7KW / 7000rpm	0.7KW / 7000rpm
Discharging Volume	25.6cc	31.5cc	31.5cc	31.5cc
N.W./G.W.	10Kgs	10Kgs	12Kgs	13Kgs
Dimension	420*330*620	405*330*640	490*395*615	415*380*555

TECHNICAL KEY DATA

Tank Capacity	25L	25L	25L	25L
Power of engine	0.9KW / 7000rpm	0.9KW / 7000rpm	0.9KW / 7000rpm	0.9KW / 7000rpm
Discharging Volume	37.7cc	37.7cc	37.7cc	37.7cc
N.W./G.W.	12Kgs	13Kgs	13Kgs	13Kgs
Dimension	405*395*640	405*395*640	425*385*665	425*385*665

TECHNICAL KEY DATA

Tank Capacity	25L	25L
Power of engine	0.9KW / 7000rpm	1.25KW / 7000rpm
Discharging Volume	37.7cc	42.7cc
N.W./G.W.	12Kgs	12Kgs
Dimension	405*395*640	405*395*640

AGRICULTURAL
DRONES



FOLDED



SPEADED



2250001											
Tank Volume	5L	10L	16L	16L	16L	20L	20L	25L	30L	50L	60L
Battery	6S 16000mA*2	12S 16000mA*1	12S 22000mA*1	14S 10000mA*1	12S 22000mA*1	14S 20000mA*1	14S 20000mA*1	14S 28000mA*2	14S 28000mA*1	14S 28000mA*2	lithium 6000mA*4
UAV Frame	4 axis carbon fiber + AL tube	4 axis carbon fiber + AL tube	4 axis carbon fiber + AL tube	4 axis carbon fiber + AL tube	6 axis carbon fiber + AL tube	4 axis carbon fiber + AL tube	6 axis carbon fiber + AL tube	6 axis carbon fiber + AL tube	6 axis carbon fiber + AL tube	6 axis carbon fiber + AL tube	6 axis carbon fiber + AL tube
Flight Control	WEIKE V7-AG	WEIKE V7-AG	WEIKE V7-AG	WEIKE V7-AG	WEIKE V7-AG	WEIKE V7-AG	WEIKE V7-AG	WEIKE V7-AG	WEIKE V7-AG	WEIKE V7-AG	WEIKE V7-AG
Remote control	H12 remote control	H12 remote control	H12 remote control	H12 remote control	H12 remote control	H12 remote control	H12 remote control	H12 remote control	H12 remote control	H12 remote control	H12 remote control
	(with a 5.5" screen)	(with a 5.5" screen)	(with a 5.5" screen)	(with a 5.5" screen)	(with a 5.5" screen)	(with a 5.5" screen)	(with a 5.5" screen)	(with a 5.5" screen)	(with a 5.5" screen)	(with a 5.5" screen)	(with a 5.5" screen)
	and includes a video and three-in-one camera	and includes a video and three-in-one camera	and includes a video and three-in-one camera	and includes a video and three-in-one camera	and includes a video and three-in-one camera	and includes a video and three-in-one camera	and includes a video and three-in-one camera	and includes a video and three-in-one camera	and includes a video and three-in-one camera	and includes a video and three-in-one camera	and includes a video and three-in-one camera
Power System	Hao Ying X6 power set	Hao Ying X8 power set	Hao Ying X8 power set	Hao Ying X9 power set	Hao Ying X8 power set	Hao Ying X0PLUS power set	Hao Ying X8 power set	Hao Ying X9 power set	Hao Ying X9 power set	Hao Ying X9-MAX power set	Hao Ying X8 power set
Charger	Tiankong PC1080	Tiankong PC1500	Tiankong PC1500	Jili 6KW generator	Tiankong PC1500	Tiankong PC1500	Tiankong PC1500	Tiankong PC1500	Tiankong PC1500	Tiankong PC3000	Zongshen 340CC/16kw
Woden Box	Export wooden box	Export wooden box	Export wooden box	Export wooden box	Export wooden box	Export wooden box	Export wooden box	Export wooden box	Export wooden box	Export wooden box	Export wooden box
Front obstacle avoidance radar	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional
Rear obstacle avoidance radar	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional
Mine-like radar	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional
RTK(Base station edition)	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional
Other accessories	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional

GASOLINE

LAWN MOWER



Powerful Engines Developed For High Performance And Maximum Reliability
4 in 1 Function Bag Collection-Side Discharge-Rear Discharge-Mulching
Self-Propelled Machine For Maximum Control With Minimum Effort
Textile Grass Catcher With Plastic Cover With 62L Large Volume



Lawn Mower	130012	130013	130014
Engine Type	Sinharbour-SG475OHV	Sinharbour SG575OHV	Sinharbour SG575,OHV
Cylinder Capacity	139cc	173cc	173cc
Engine Power	2.3kW@2800rpm	3.2kW@2800rpm	3.2kW@2800rpm
Drivetype	Self-propelled	Hand push	Self-propelled
Working width	46cm(18inch)	51cm(20inch)	51cm(20inch)
Housing	steel	steel	steel
Cutting heght	25-75mm(8 position central)	25-75mm(8 position centra)	25-75mm(8 position centra)
Whee size	7"/10"	8"/11"or 7"/10°	8"/11"or 7"/10°
Grass Catcher Voume	62L	62L	62L
Carton Size L"W"H(cm)	77*56.5*50	83*57*50	83*57*50
Loading Qty(20/40/40HQ)	120/248/310	104/224/280	104/224/280

GASOLINE

LAWN MOWER



Lawn Mower	130015	130016	130017	130018
Engine Type	Sinharbour N196OHV	Sinharbour N196,OHV	Sinharbour SG575,OHV	Sinharbour N196,OHV
Cylinder Capacity	196cc	196cc	173cc	196cc
Engine Power	3.2kW@2800rpm	3.6kW@2800rpm	3.2kW@2800rpm	3.6kW@2800rpm
Drivetype	Self-propelled	Self-propelled	Self-propelled	Self-propelled
Working width	51cm(20inch)	51cm(20inch)	53cm(21inch)	53cm(21inch)
Housing	steel	steel	steel	steel
Cutting heght	25-75mm(8 position centra)	25-75mm(8 position centra)	25-75mm(8 postion central)	25-75mm(8 postion central)
Whee size	8"/11"or 7"/10°	8"/11"or 7"/10°	8"/11"or 7"/10°	8"/11"or 7"/10°
Grass Catcher Voume	62L	62L	62L	62L
Carton Size L"W"H(cm)	83*57*50	83*57*50	85*58*50	85*58*50
Loading Qty(20/40/40HQ)	104/224/280	104/224/280	104/216/270	104/216/270



Lawn Mower	130019	130020	130021	130022
Engine Type	Sinharbour N196,OHV	Sinharbour-SG575,OHV	Sinharbour N196,OHV	Sinharbour N196,OHV
Cylinder Capacity	196cc	173cc	196cc	196cc
Engine Power	3.6kW@2800rpm	3.2kW@2800rpm	3.6kW@2800rpm	3.6kW@2800rpm
Drivetype	Self-propelled	Self-propelled	Self-propelled	Self-propelled
Working width	53cm(21inch)	56cm (22inch)	56cm (22inch)	56cm (22inch)
Housing	steel	steel	steel	steel
Cutting heght	25-75mm(8 postion central)	30-80mm(8 position central)	25-75mm(8 position central)	25-75mm(8 position central)
Whee size	8"/11"or 7"/10°	8"/11"	8"/11"	8"/11"
Grass Catcher Voume	62L	62L	62L	62L
Carton Size L"W"H(cm)	85*58*48	92*62*50	92*62*50	92*62*50
Loading Qty(20/40/40HQ)	104/216/270	84/176/220	84/176/220	84/176/220

12
ELECTRIC
GENERATOR

PURE SINE WAVE

POWER
GENERATOR

- air-cooled
- one pull to start
- lightweight
- stable voltage



2430001

Type	Forced Air-Cooled, 2-Stroke
Displacement	42.7 cc
Ignition system	C.D.I
start method	Recoil start
Engine speed	3300-4500 RPM
Fuel tank capacity	3.5 L
Fuel	Unleaded gasoline
Fuel consumption	550 g/KW*h
Continuous operating hours(70% of rated load)	4 h
Noise (7m away)	65 dba
Rated output frequency	50/60 HZ
Rated A.C. Output	110/120/230/240 V
D. C. Output	N
Rated power output(KVA)	0.8 KW
Max. power output(KVA)	1.0 KVA
Length*Width*Height	320*250*330 mm
Net weight / Gross weight	8.5/10 kg
Packing size(mm)	330*270*370 mm
Fuel gauge	N
Auto voltage adjustor	on board
Low oil alert	N
Circuit protector	on board
2*USB socket	N
Parallel connection	N



2430002

Type	Air-Cooled, 4-Stroke, OHV
Displacement	79.7 cc
Ignition system	C.D.I
start method	Recoil start
Engine speed	3300-4500 RPM
Fuel tank capacity	4 L
Fuel	Unleaded gasoline
Fuel consumption	400 g/KW*h
Continuous operating hours(70% of rated load)	6 h
Noise (7m away)	59 dba
Rated output frequency	50/60 HZ
Rated A.C. Output	110/120/230/240 V
D. C. Output	12 V, 8.3 A
Rated power output(KVA)	1.7 KW
Max. power output(KVA)	1.9 KW
Length*Width*Height	480*285*420 mm
Net weight / Gross weight	21/24 kg
Packing size(mm)	520*330*465 mm
Fuel gauge	Y
Auto voltage adjustor	on board
Low oil alert	Y
Circuit protector	on board
2*USB socket	optional (+5 USD)
Parallel connection	optional (+5 USD)

PURE SINE WAVE
POWER
GENERATOR

- air-cooled
- one pull to start
- lightweight
- stable voltage



2430003	
Type	Air-Cooled, 4-Stroke, OHV
Displacement	142.6 cc
Ignition system	C.D.I
start method	Recoil start
Engine speed	3300-4500 RPM
Fuel tank capacity	4 L
Fuel	Unleaded gasoline
Fuel consumption	400 g/KW*h
Continuous operating hours(70% of rated load)	5 h
Noise (7m away)	59 dba
Rated output frequency	50/60 HZ
Rated A.C. Output	110/120/230/240 V
D. C. Output	12 V, 8.3 A
Rated power output(KVA)	2.7 KW
Max. power output(KVA)	3.0 KW
Length*Width*Height	480*285*420 mm
Net weight / Gross weight	23/26 kg
Packing size(mm)	520*330*465 mm
Fuel gauge	Y
Auto voltage adjustor	on board
Low oil alert	Y
Circuit protector	on board
2*USB socket	optional (+5 USD)
Parallel connection	optional (+5 USD)



2430004	
Type	Air-Cooled, 4-Stroke, OHV
Displacement	142.6 cc
Ignition system	C.D.I
start method	Recoil start + Electric start
Engine speed	3300-4500 RPM
Fuel tank capacity	15 L
Fuel	Unleaded gasoline
Fuel consumption	400g/kw.h
Continuous operating hours(70% of rated load)	11 h
Noise (7m away)	60 dba
Rated output frequency	50/60 HZ
Rated A.C. Output	110/120/230/240 V
D. C. Output	12 V, 8.3 A
Rated power output(KVA)	2.7 KW
Max. power output(KVA)	3.0 KW
Length*Width*Height	710*420*515 mm
Net weight / Gross weight	41/46 kg
Packing size(mm)	735*475*615 mm
Fuel gauge	Y
Auto voltage adjustor	on board
Low oil alert	Y
Circuit protector	on board
2*USB socket	optional (+5 USD)
Parallel connection	optional (+5 USD)

PURE SINE WAVE
POWER
GENERATOR

- air-cooled
- one pull to start
- lightweight
- stable voltage



2430005	
Type	Air-Cooled, 4-Stroke, OHV
Displacement	119 cc
Ignition system	C.D.I
start method	Recoil start
Engine speed	2800-3800 rpm
Fuel tank capacity	10 L
Fuel	Unleaded gasoline
Fuel consumption	550g/kw.h
Continuous operating hours(70% of rated load)	8 h
Noise (7m away)	65 dba
Rated output frequency	50/60 HZ
Rated A.C. Output	110/120/230/240 V
D. C. Output	N
Rated power output(KVA)	1.8 KW
Max. power output(KVA)	2.0 KW
Length*Width*Height	455*385*435 mm
Net weight / Gross weight	21/23kg
Packing size(mm)	480*390*465 mm
Fuel gauge	Y
Auto voltage adjustor	on board
Low oil alert	Y
Circuit protector	on board
2*USB socket	optional (+5 USD)
Parallel connection	optional (+5 USD)



2430006	
Type	Air-Cooled, 4-Stroke, OHV
Displacement	212 cc
Ignition system	C.D.I
start method	Recoil start
Engine speed	2800-3800 RPM
Fuel tank capacity	13 L
Fuel	Unleaded gasoline
Fuel consumption	450g/kw.h
Continuous operating hours(70% of rated load)	8 h
Noise (7m away)	69 dba
Rated output frequency	50/60 HZ
Rated A.C. Output	110/120/230/240 V
D. C. Output	12 V, 8.3 A
Rated power output(KVA)	3.2 KW
Max. power output(KVA)	3.5 KW
Length*Width*Height	520*440*470 mm
Net weight / Gross weight	34/37 kg
Packing size(mm)	560*480*500 mm
Fuel gauge	Y
Auto voltage adjustor	on board
Low oil alert	Y
Circuit protector	on board
2*USB socket	optional (+5 USD)
Parallel connection	optional (+5 USD)

PURE SINE WAVE

POWER GENERATOR



2430007	
Type	Air-Cooled, 4-Stroke, OHV
Displacement	236 cc
Ignition system	C.D.I
start method	Recoil start / Electric start
Engine speed	3500-4400 RPM
Fuel tank capacity	18 L
Fuel	Unleaded gasoline
Fuel consumption	400g/kw.h
Continuous operating hours(70% of rated load)	9 h
Noise (7m away)	75 dba
Rated output frequency	50/60 HZ
Rated A.C. Output	110/120/230/240 V
D. C. Output	12 V, 8.3 A
Rated power output(KVA)	4.8 KW
Max. power output(KVA)	5.2 KW
Length*Width*Height	550*450*500 mm
Net weight / Gross weight	43/47 kg
Packing size(mm)	590*490*520 mm
Fuel gauge	Y
Auto voltage adjustor	on board
Low oil alert	Y
Circuit protector	on board
2*USB socket	optional (+5 USD)
Parallel connection	optional (+5 USD)



PURE SINE WAVE

POWER GENERATOR




2430008	
Type	Air-Cooled, 4-Stroke, OHV
Displacement	79.7 cc
Ignition system	C.D.I
start method	Recoil start
Engine speed	3300-4500 RPM
Fuel tank capacity	4 L
Fuel	Unleaded gasoline
Fuel consumption	400 g/KW*h
Continuous operating hours(70% of rated load)	6 h
Noise (7m away)	59 dba
Rated output frequency	50/60 HZ
Rated A.C. Output	110/120/230/240 V
D. C. Output	12 V, 8.3 A
Rated power output(KVA)	1.7 KW
Max. power output(KVA)	1.9 KW
Length*Width*Height	480*285*440 mm
Net weight / Gross weight	21/24 kg
Packing size(mm)	545*335*465 mm
Fuel gauge	Y
Auto voltage adjustor	on board
Low oil alert	Y
Circuit protector	on board
2*USB socket	optional (+5 USD)
Parallel connection	optional (+5 USD)

How Inverter Generator Work

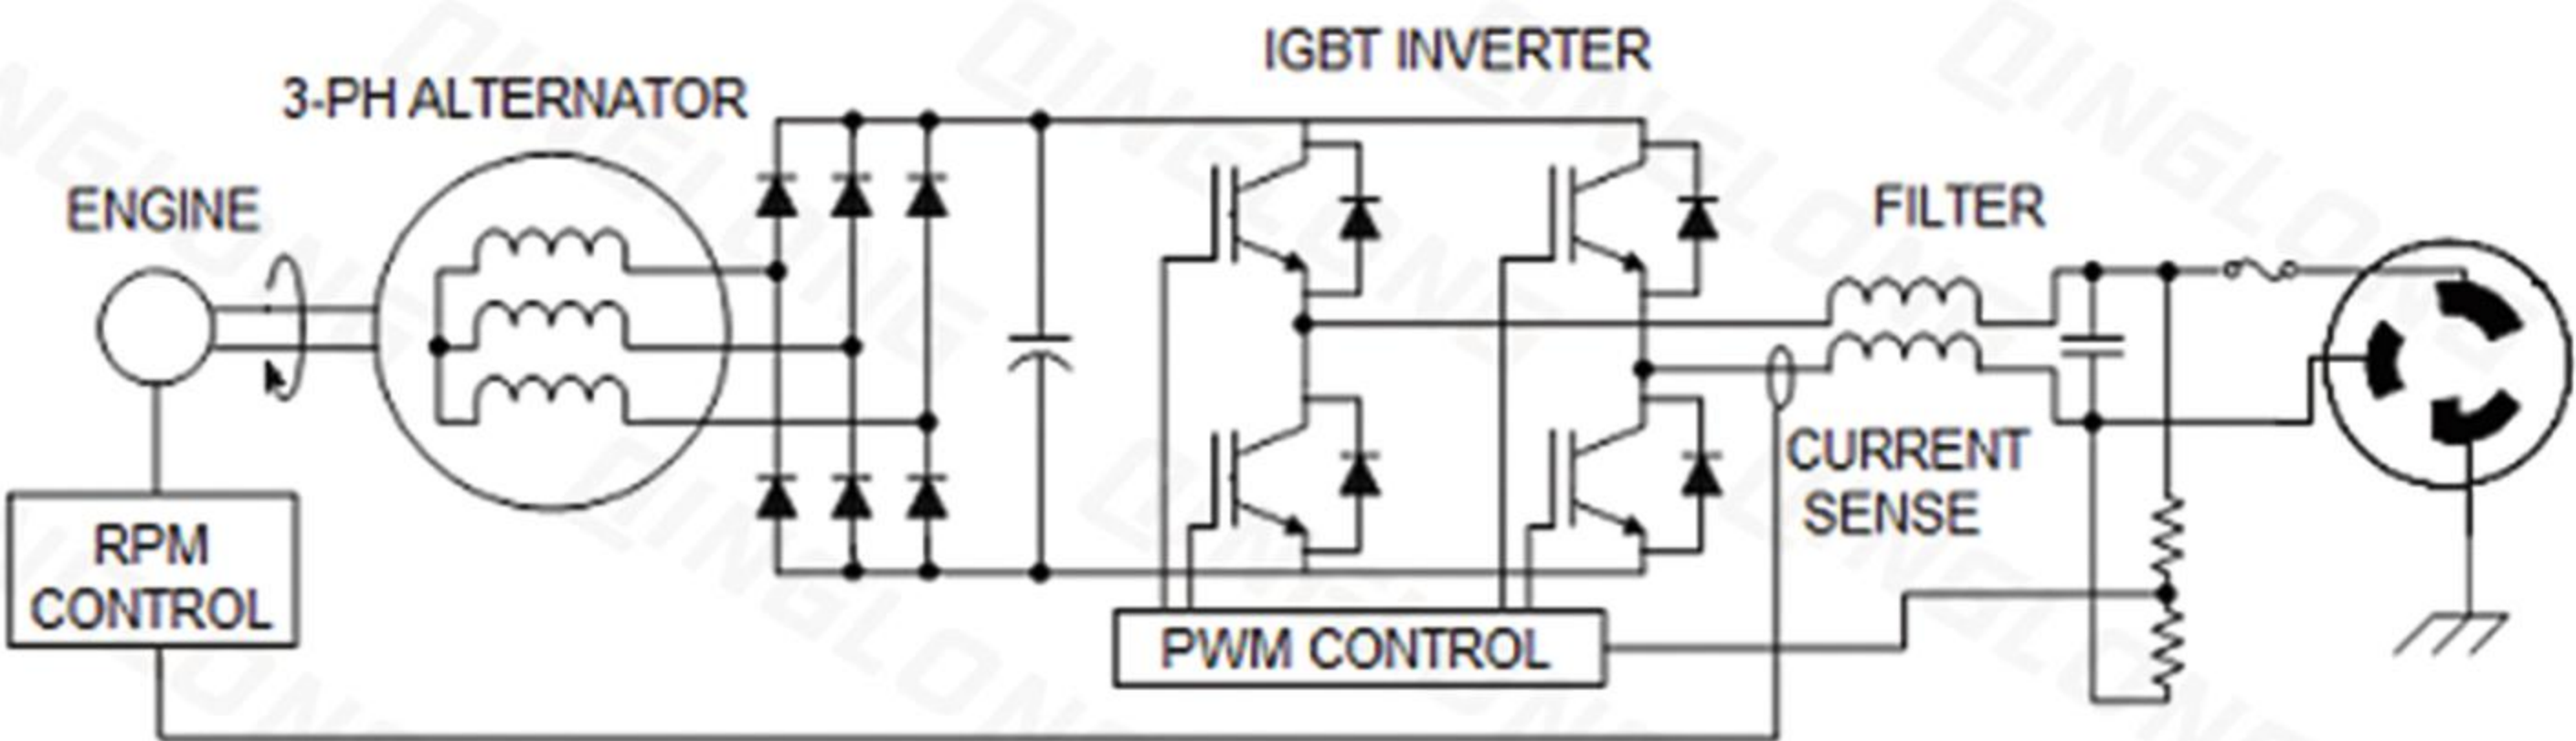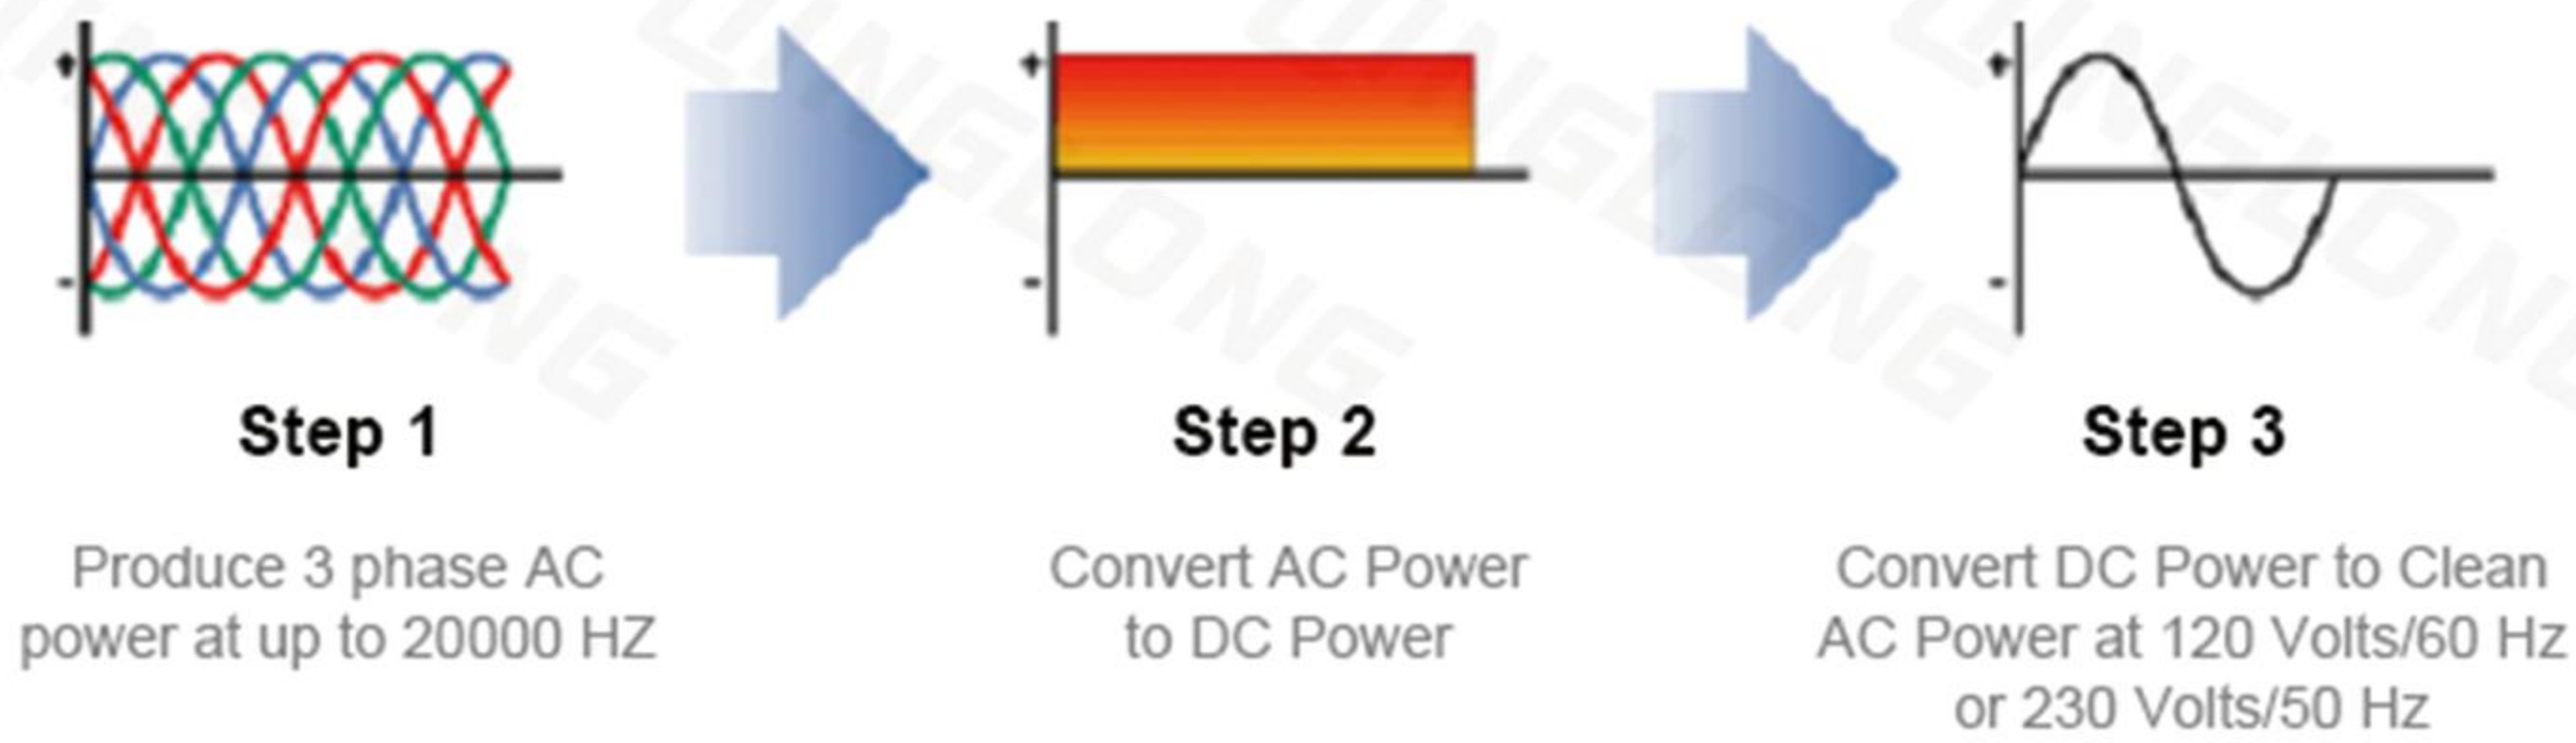

Conventional Generators: 3000 RPM (50 Hz) or 3600 RPM (60 Hz)
Inverter Generators: engine speed controlled by the inverter unit, changing with the load.
(up to 5000 RPM)

Why Inverter Generators Are Better

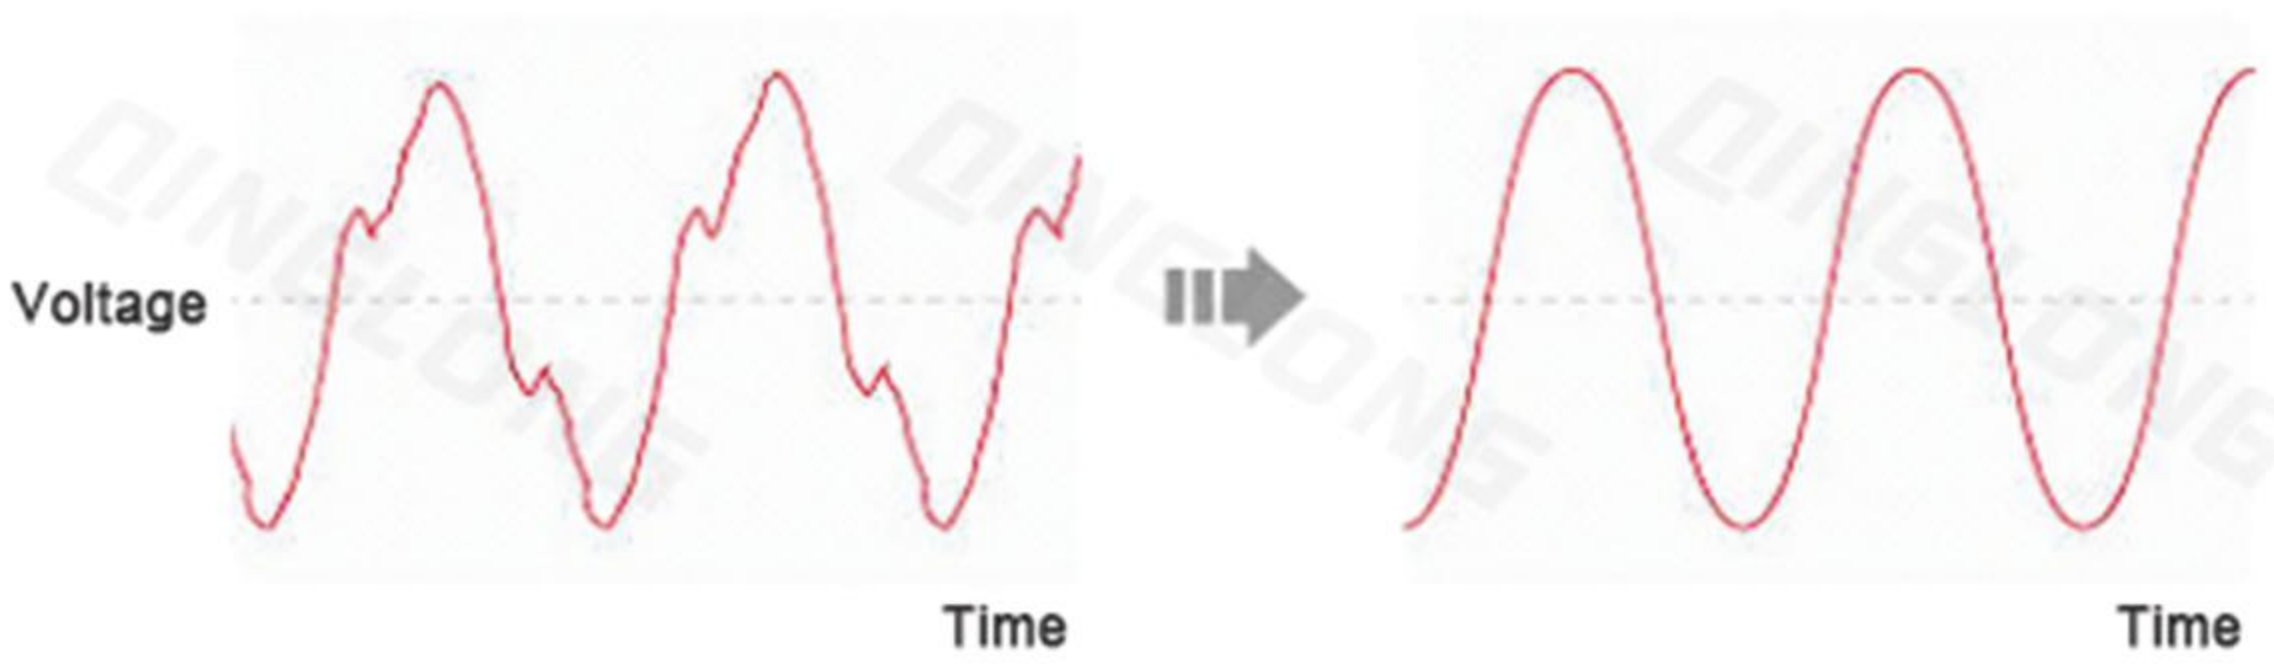

Qinglong Inverter generators produce pure sine wave power, which can be used to some sensitive devices like computers, phones, TVs, stereos, even some power tools. Using power that isn't "clean" can make these devices malfunction, or even damage them.



1 WATER PUMP

FOR DIRTY WATER

GARDEN WATER PUMP




CONTINUOUS WORK DOES NOT TURN OFF

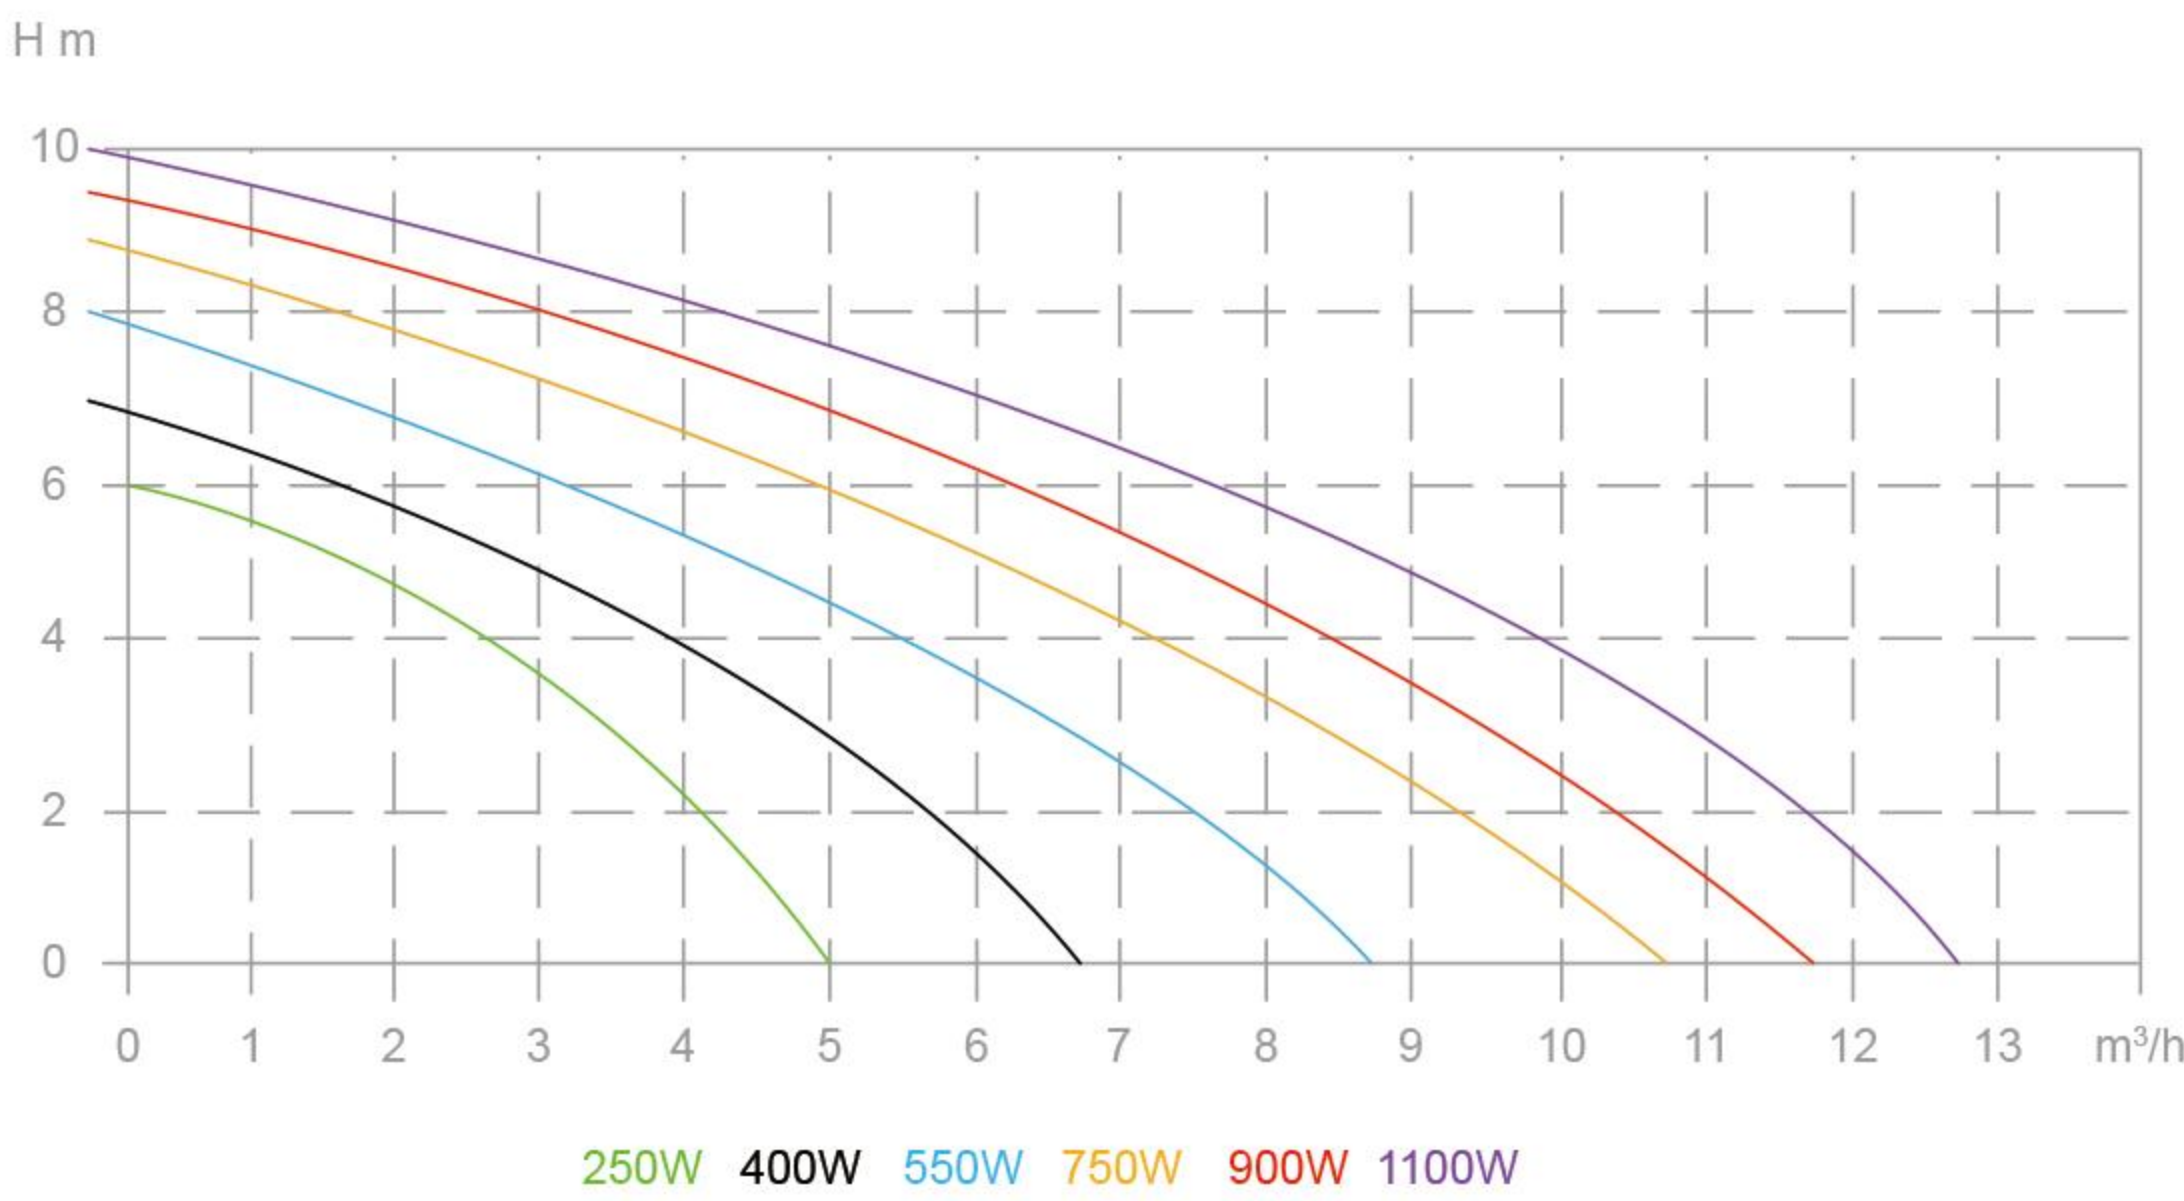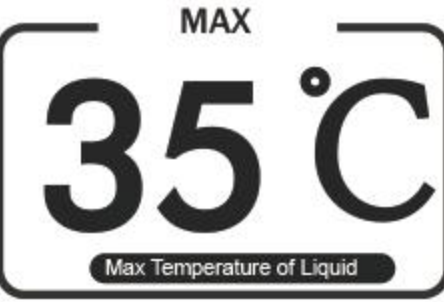

2010001

Motor	Voltage / Frequency	Max Head	Max Flow	Max Suct	Inner Diameter	Pipe Diameter	Cable Length _m	Product Size	Packing Size / 4pcs	20'Gp
250W	230V / 50HZ	6m	5000l/h	5m	5mm	1", G1", 1-1/2"mm	H05RN 0.75	22*16*31cm	46*34*33cm	2300
400W	230V / 50HZ	7m	7000l/h	7m	5mm	1", G1", 1-1/2"mm	H05RN 0.75	22*16*31cm	46*34*33cm	2300
550W	230V / 50HZ	8m	9000l/h	7m	5mm	1", G1", 1-1/2"mm	H05RN 0.75	22*16*31cm	46*34*33cm	2300
750W	230V / 50HZ	9m	11000l/h	7m	5mm	1", G1", 1-1/2"mm	H07RN 1.0	22*16*34cm	46*34*36cm	2040
900W	230V / 50HZ	9.5m	12000l/h	7m	5mm	1", G1", 1-1/2"mm	H07RN 1.0	22*16*34cm	46*34*36cm	2040
1100W	230V / 50HZ	10m	13000l/h	7m	5mm	1", G1", 1-1/2"mm	H07RN 1.0	22*16*34cm	46*34*36cm	2040

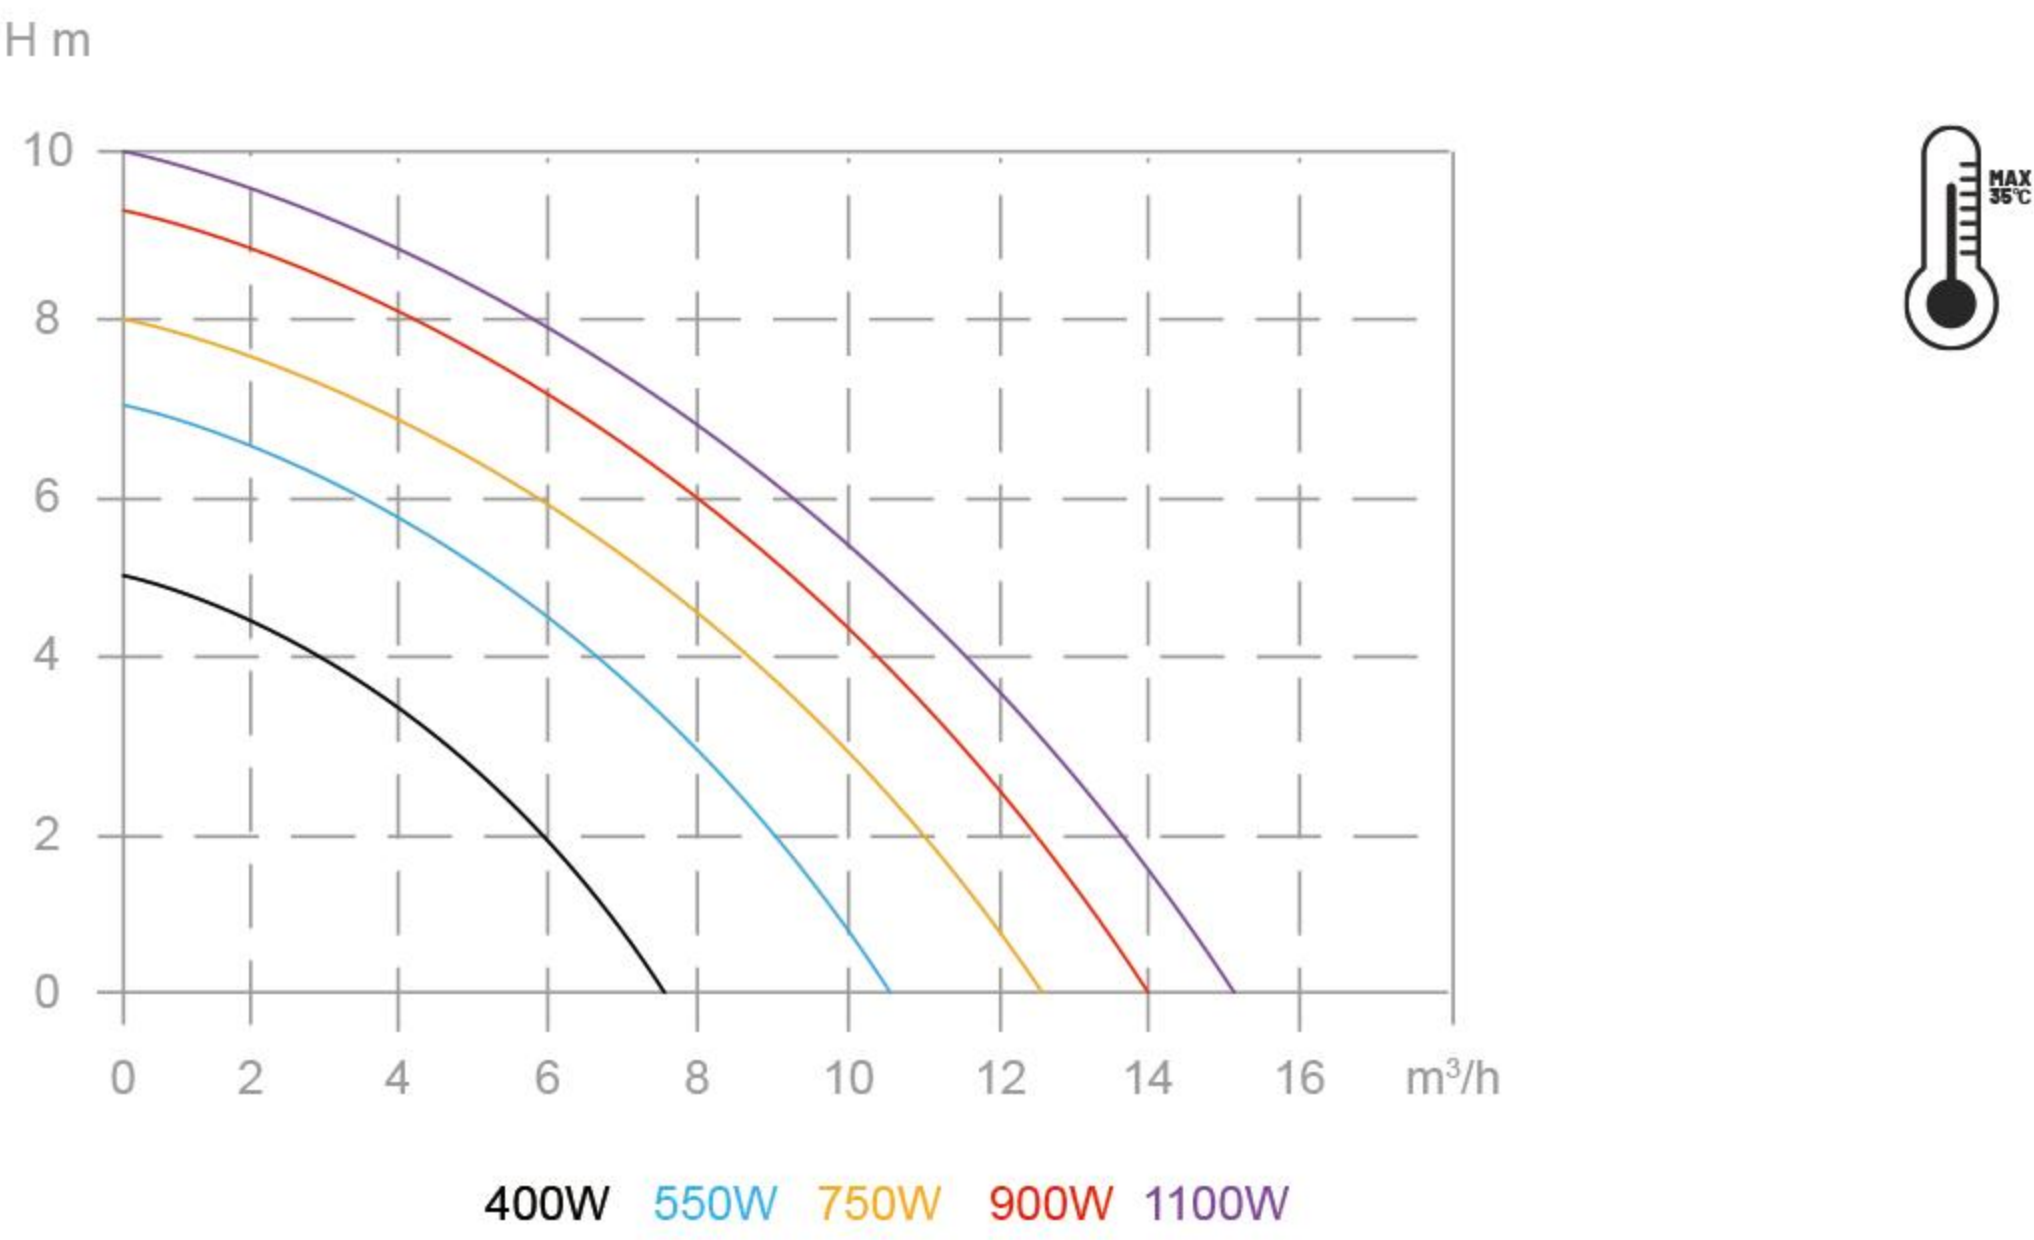

2010002



Motor	Voltage / Frequency	Max Head	Max Flow	Max Suct	Inner Diameter	Pipe Diameter	Cable Length _m	Product Size	Packing Size / 4pcs	20'Gp
400W	230V / 50HZ	5m	7500l/h	5m	35mm	1", G1", 1-1/2"mm	H05RN 0.75	22*16*34cm	46*34*36cm	2040
550W	230V / 50HZ	7m	10500l/h	7m	35mm	1", G1", 1-1/2"mm	H05RN 0.75	22*16*34cm	46*34*36cm	2040
750W	230V / 50HZ	8m	12500l/h	7m	35mm	1", G1", 1-1/2"mm	H07RN 1.0	22*16*37cm	46*34*38.5cm	2040
900W	230V / 50HZ	9m	14000l/h	7m	35mm	1", G1", 1-1/2"mm	H07RN 1.0	22*16*37cm	46*34*38.5cm	1900
1100W	230V / 50HZ	9.5m	15000l/h	7m	35mm	1", G1", 1-1/2"mm	H07RN 1.0	22*16*37cm	46*34*38.5cm	1900
/	/	/	/	/	/	/	/	/	/	/

FOR DIRTY WATER

GARDEN
WATER
PUMP




CONTINUOUS WORK DOES
NOT TURN OFF

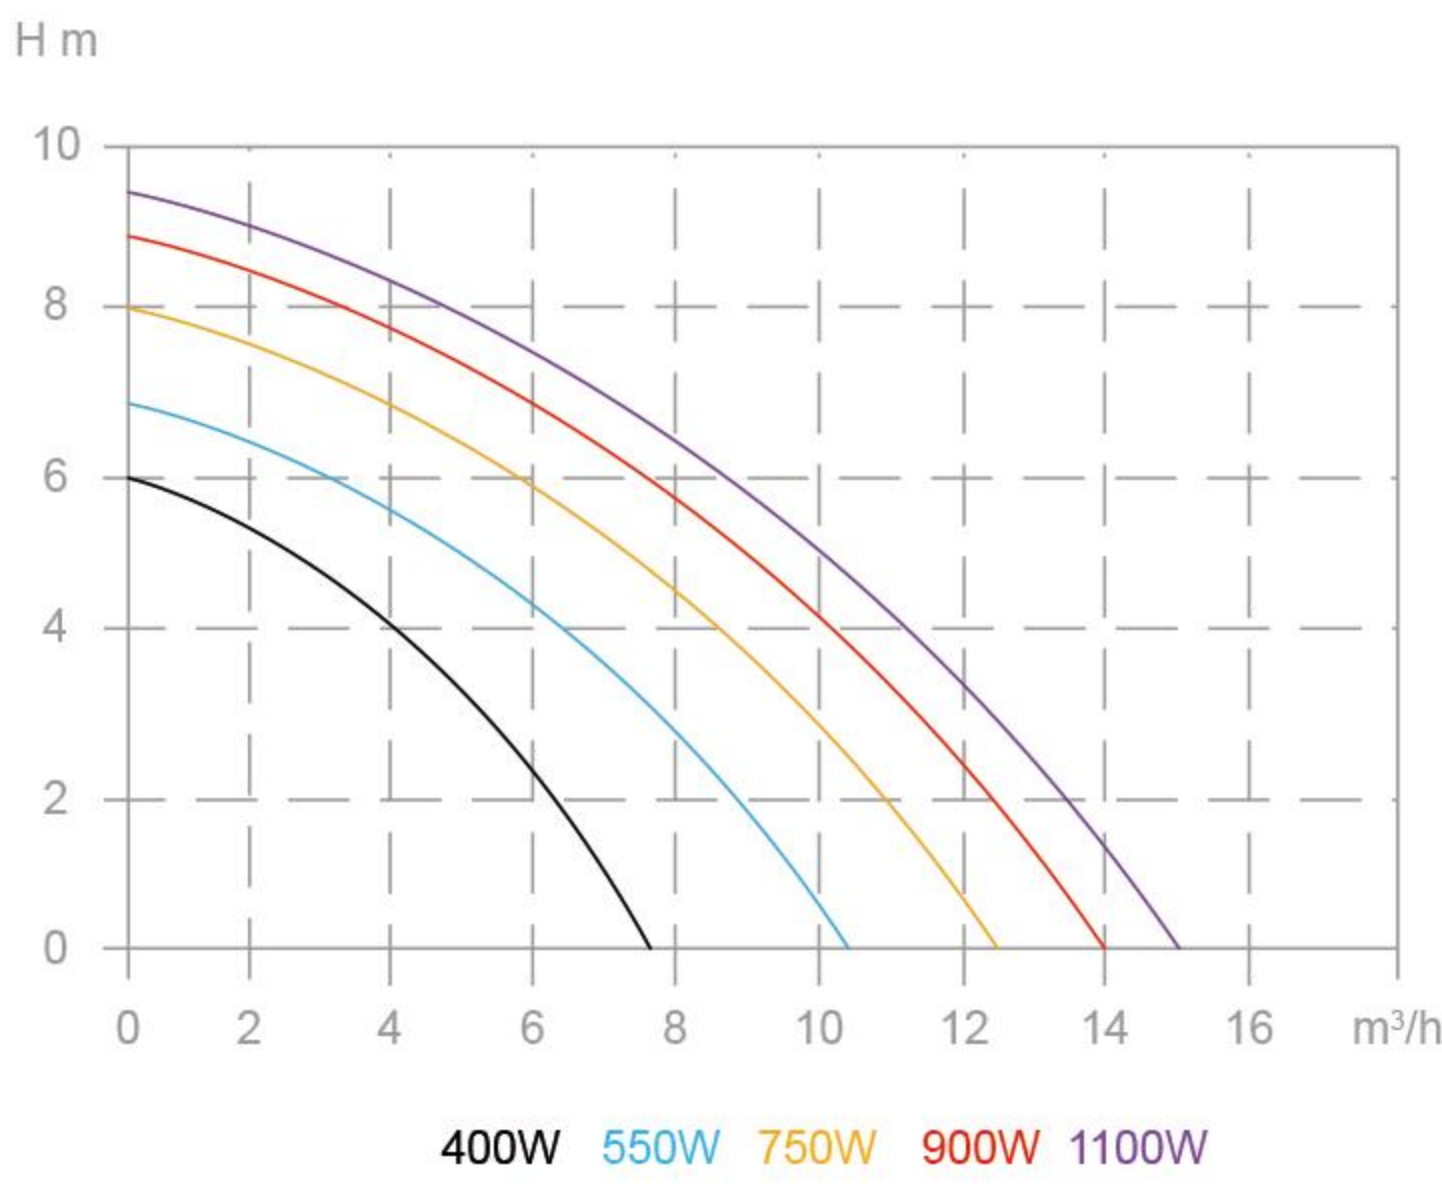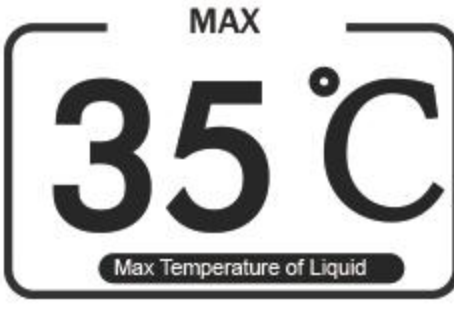

2010003

Motor	Voltage / Frequency	Max Head	Max Flow	Max Suct	Inner Diameter	Pipe Diameter	Cable Length _m	Product Size	Packing Size / 4pcs	20"Gp
400W	360V / 50HZ	6m	7500l/h	5m	35mm	1",G1",1-1/2"mm	H05RN 0.75	22*16*31cm	46*34*33cm	2040
500W	360V / 50HZ	7m	10500l/h	7m	35mm	1",G1",1-1/2"mm	H05RN 0.75	22*16*31cm	46*34*33cm	2040
750W	360V / 50HZ	8m	12500l/h	7m	35mm	1",G1",1-1/2"mm	H07RN 1.0	22*16*34cm	46*34*36cm	2040
900W	360V / 50HZ	9m	14000l/h	7m	35mm	1",G1",1-1/2"mm	H07RN 1.0	22*16*34cm	46*34*36cm	1900
1100W	360V / 50HZ	9.5m	15000l/h	7m	35mm	1",G1",1-1/2"mm	H07RN 1.0	22*16*34cm	46*34*36cm	1900
/	/	/	/	/	/	/	/	/	/	/

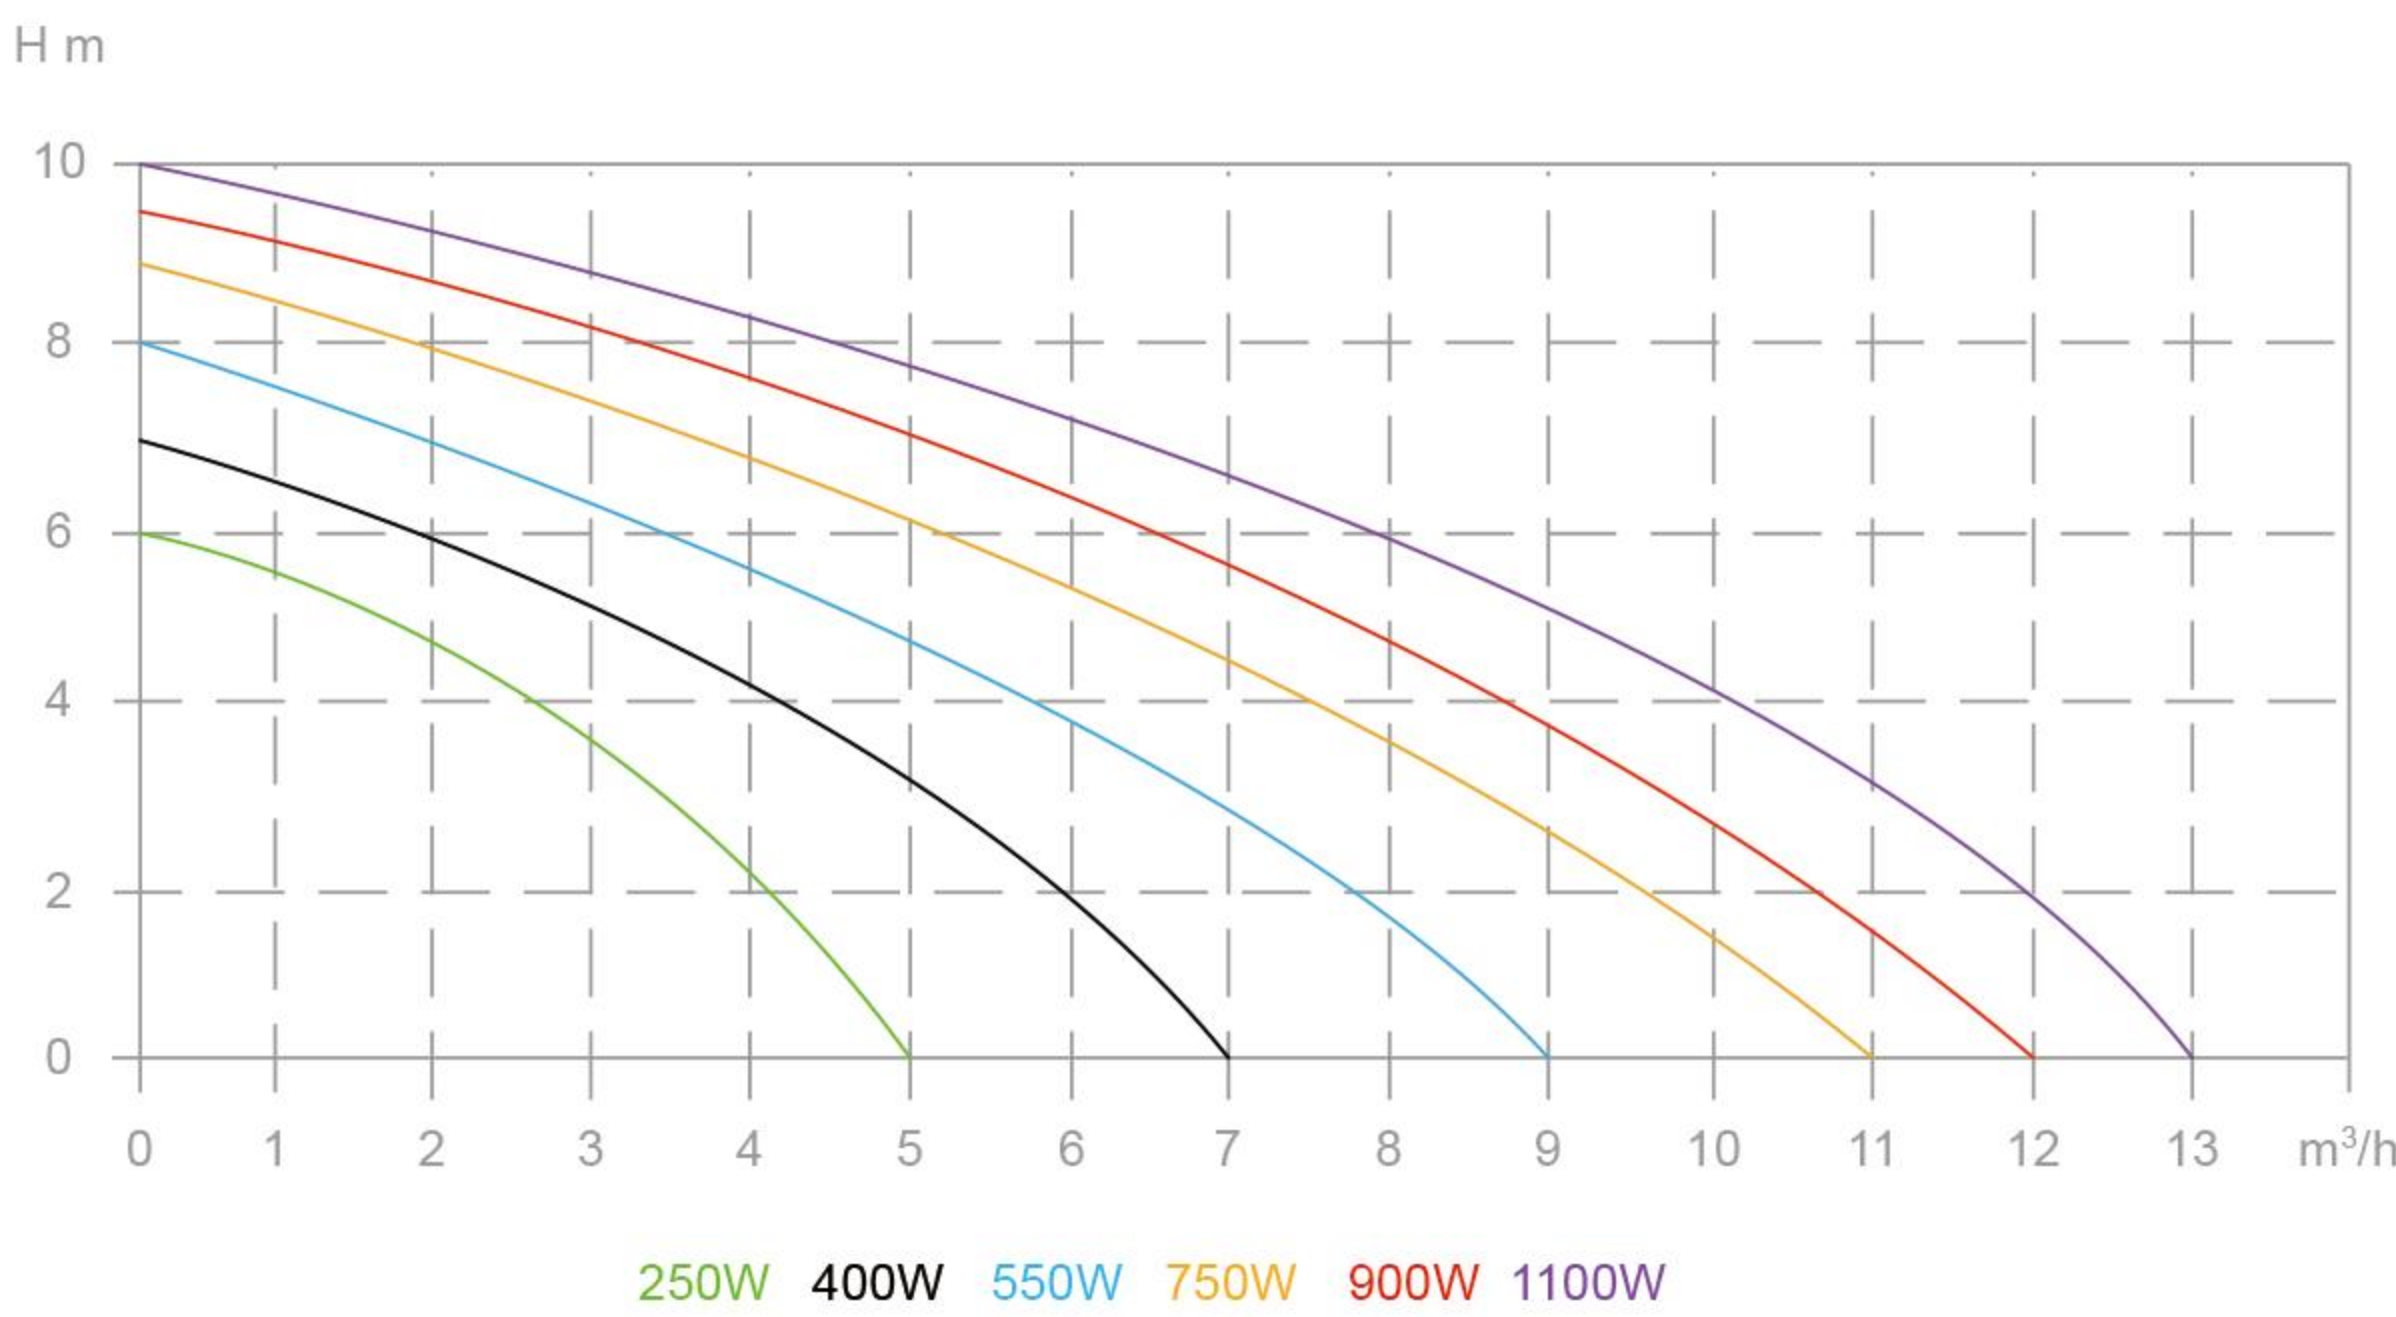

2010004



Motor	Voltage / Frequency	Max Head	Max Flow	Max Suct	Inner Diameter	Pipe Diameter	Cable Length _m	Product Size	Packing Size / 4pcs	20"Gp
400W	230V / 50HZ	5m	7500l/h	5m	35mm	1",G1",1-1/2"mm	H05RN 0.75	22*16*34cm	46*34*36cm	2040
550W	230V / 50HZ	7m	10500l/h	7m	35mm	1",G1",1-1/2"mm	H05RN 0.75	22*16*34cm	46*34*36cm	2040
750W	230V / 50HZ	8m	12500l/h	7m	35mm	1",G1",1-1/2"mm	H07RN 1.0	22*16*37cm	46*34*38.5cm	2040
900W	230V / 50HZ	9m	14000l/h	7m	35mm	1",G1",1-1/2"mm	H07RN 1.0	22*16*37cm	46*34*38.5cm	1900
1100W	230V / 50HZ	9.5m	15000l/h	7m	35mm	1",G1",1-1/2"mm	H07RN 1.0	22*16*37cm	46*34*38.5cm	1900
/	/	/	/	/	/	/	/	/	/	/

FOR DIRTY WATER

GARDEN
WATER
PUMP




CONTINUOUS WORK DOES
NOT TURN OFF

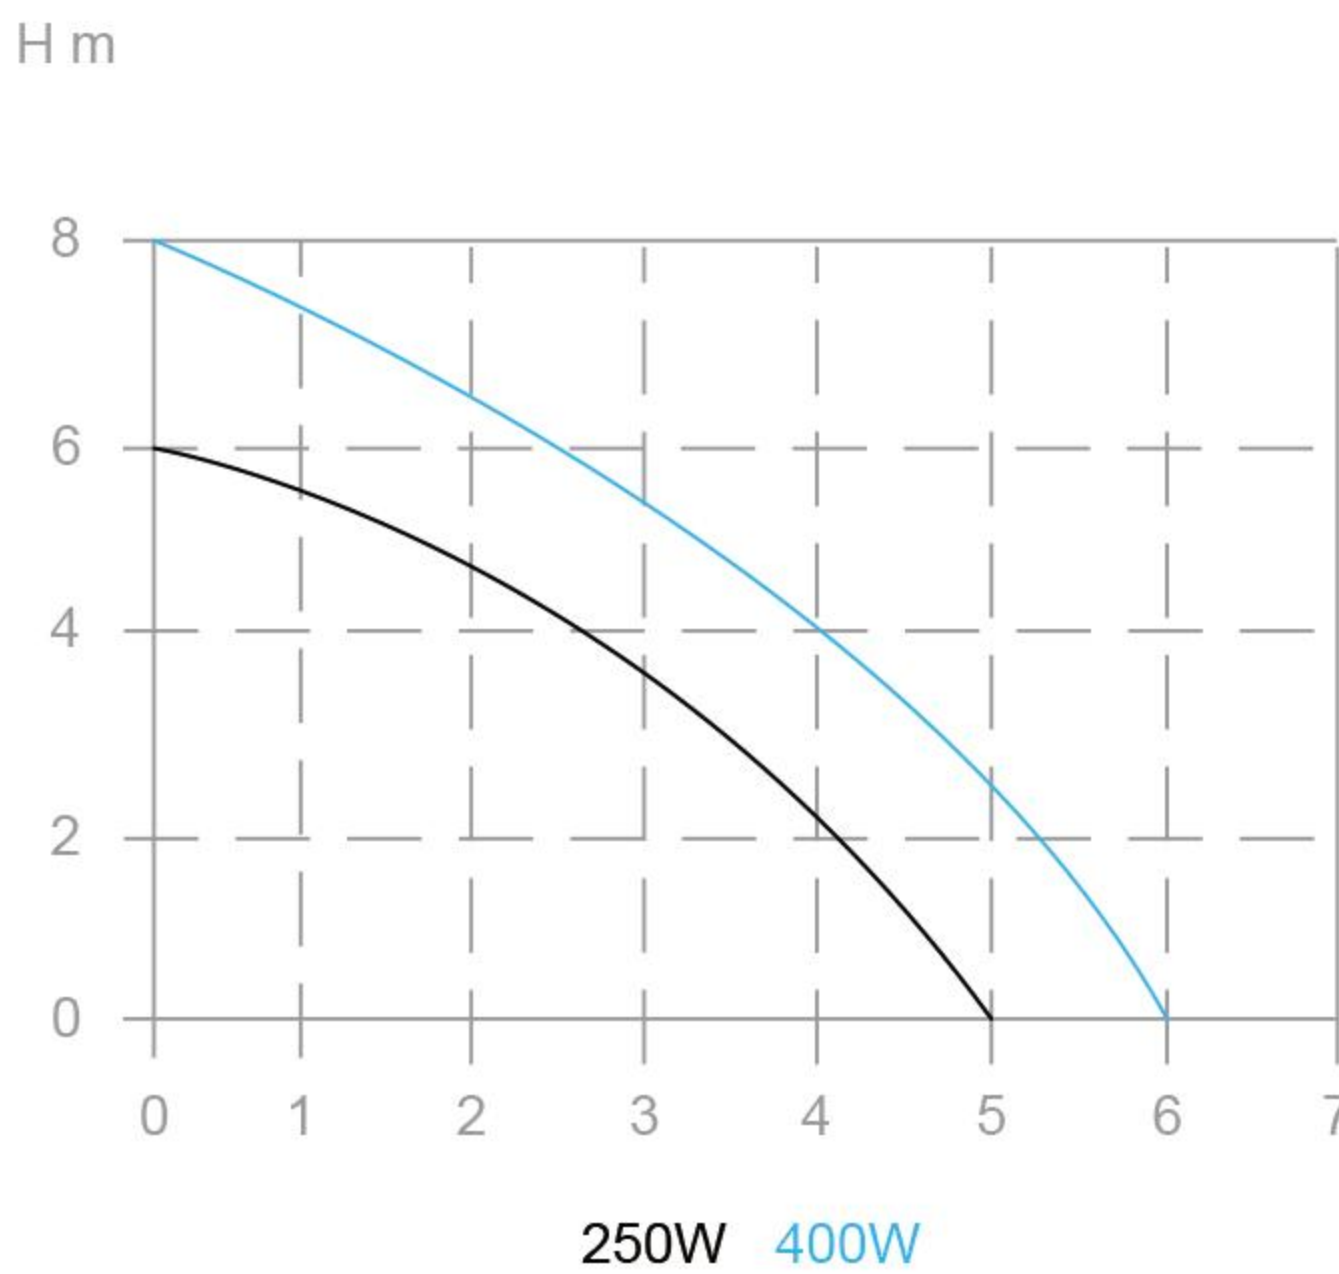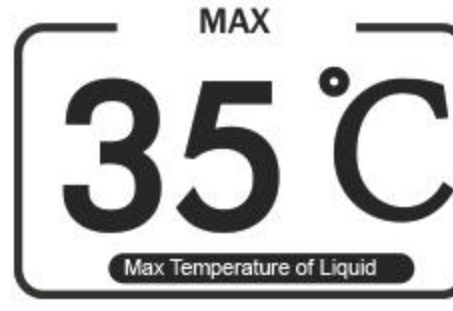

2010005

Motor	Voltage / Frequency	Max Head	Max Flow	Max Suct	Inner Diameter	Pipe Diameter	Cable Length _m	Product Size	Packing Size / 4pcs	20"Gp
250W	230V / 50HZ	6m	5000l/h	5m	5mm	1",G1",1-1/2"mm	H05RN 0.75	22*16*31cm	46*34*33cm	2300
400W	230V / 50HZ	7m	7000l/h	7m	5mm	1",G1",1-1/2"mm	H05RN 0.75	22*16*31cm	46*34*33cm	2300
550W	230V / 50HZ	8m	9000l/h	7m	5mm	1",G1",1-1/2"mm	H05RN 0.75	22*16*31cm	46*34*33cm	2300
750W	230V / 50HZ	9m	11000l/h	7m	5mm	1",G1",1-1/2"mm	H07RN 1.0	22*16*34cm	46*34*36cm	2040
900W	230V / 50HZ	9.5m	12000l/h	7m	5mm	1",G1",1-1/2"mm	H07RN 1.0	22*16*34cm	46*34*36cm	2040
1100W	230V / 50HZ	10m	13000l/h	7m	5mm	1",G1",1-1/2"mm	H07RN 1.0	22*16*34cm	46*34*36cm	2040

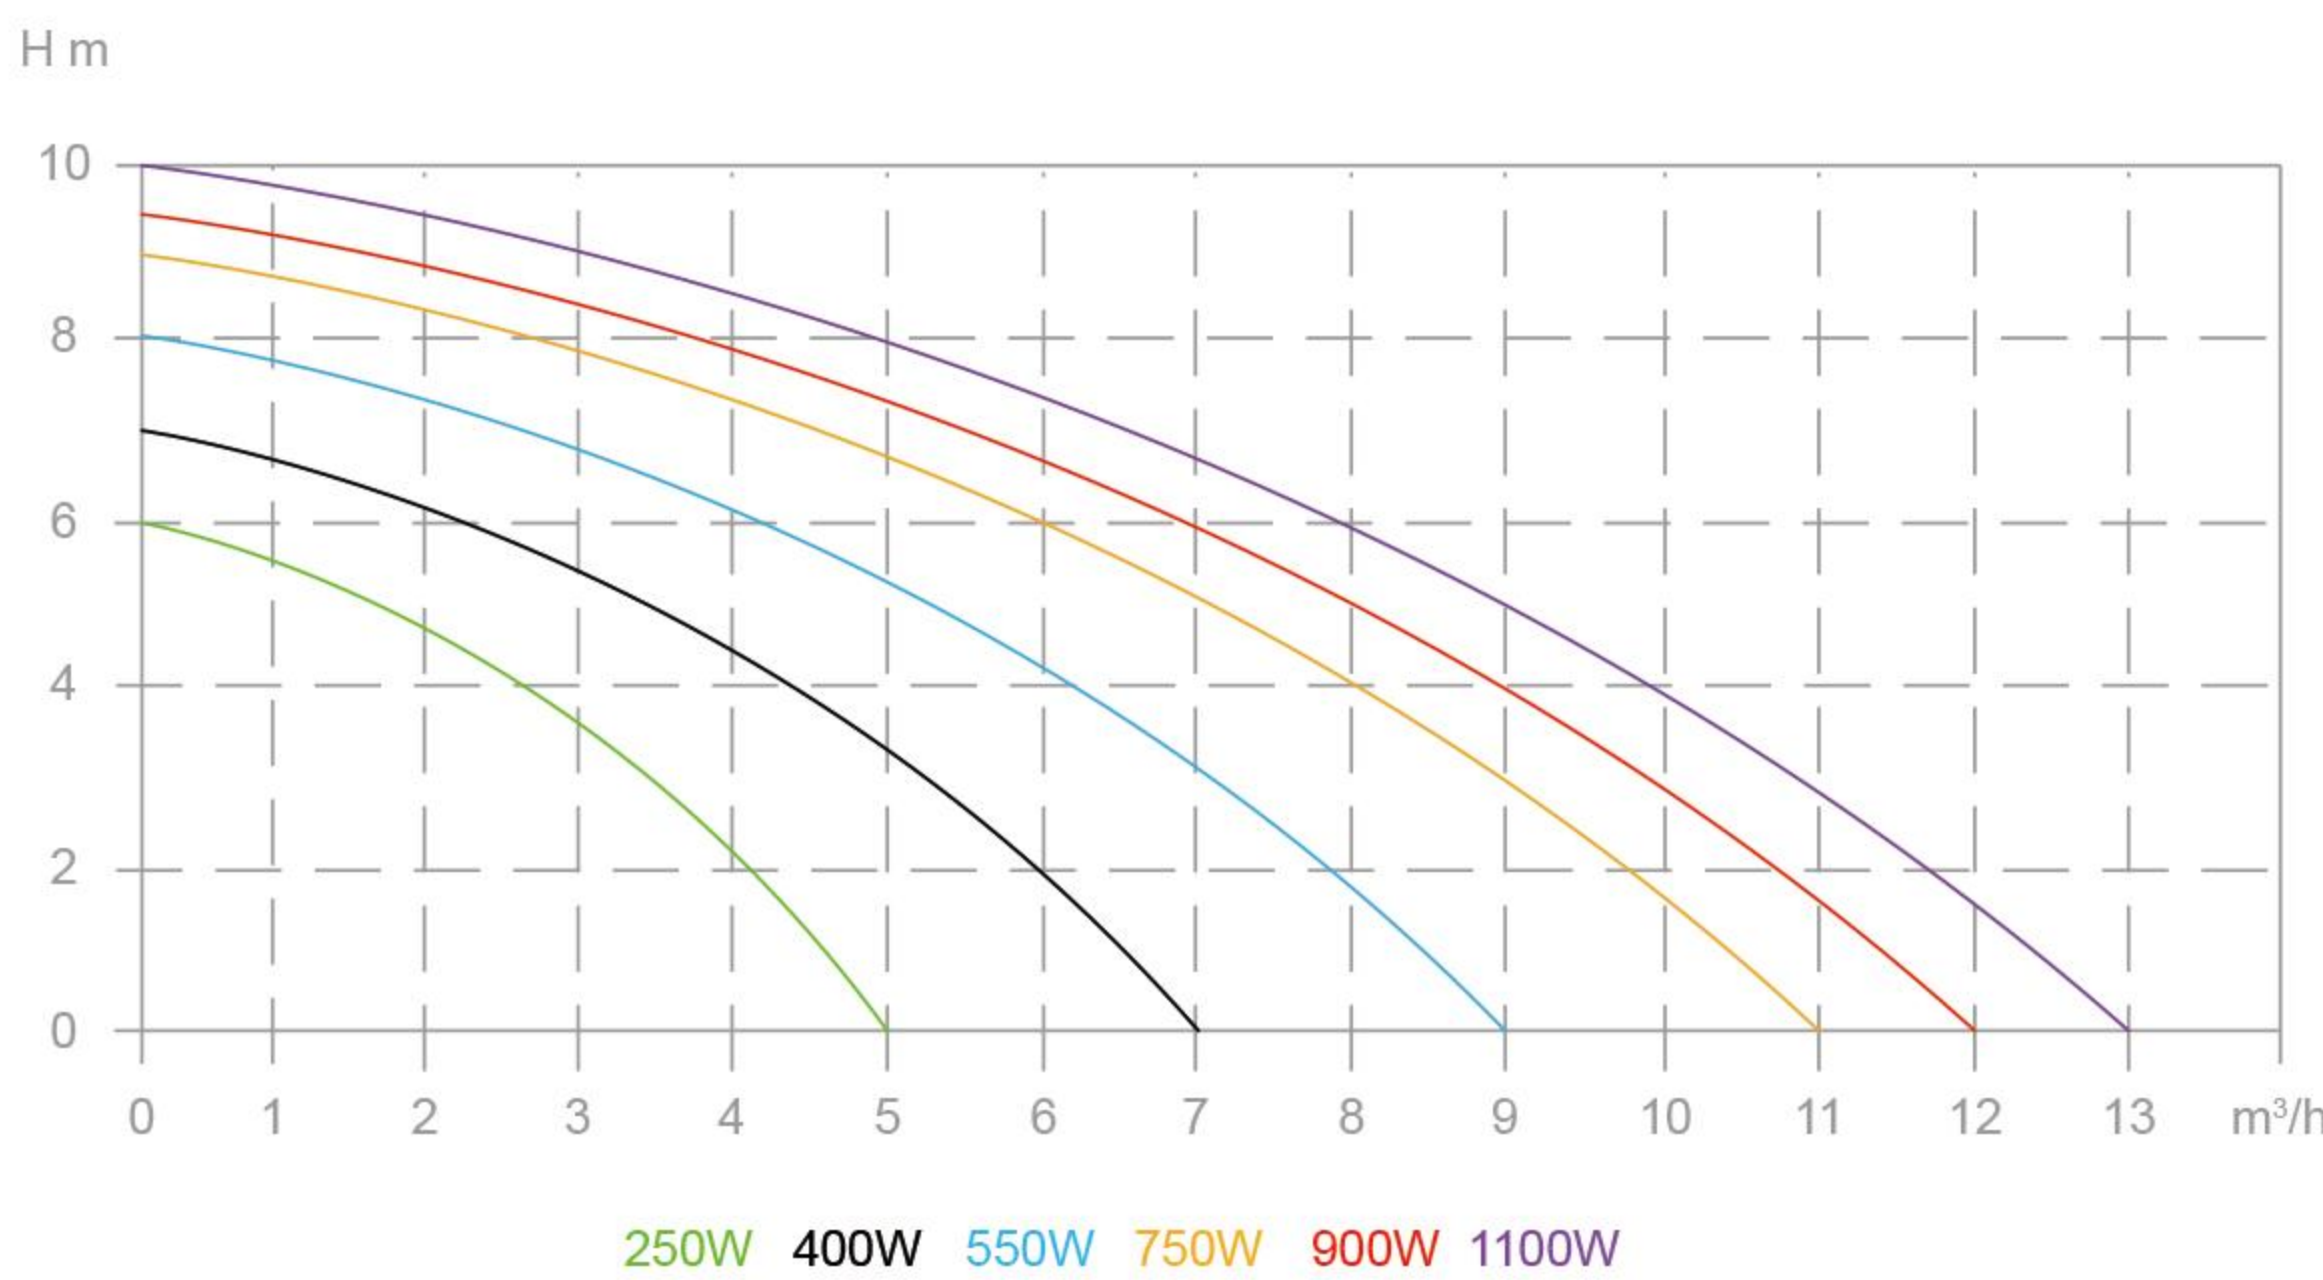

2010006


Motor	Voltage / Frequency	Max Head	Max Flow	Max Suct	Inner Diameter	Pipe Diameter	Cable Length _m	Product Size	Packing Size / 4pcs	20"Gp
250W	230V / 50HZ	6m	5000l/h	5m	5mm	1",G1",1-1/2"mm	H05RN 0.75	22*16*31cm	46*34*33cm	2040
400W	230V / 50HZ	7m	7000l/h	7m	5mm	1",G1",1-1/2"mm	H05RN 0.75	22*16*31cm	46*34*33cm	2040
550W	230V / 50HZ	8m	9000l/h	7m	5mm	1",G1",1-1/2"mm	H05RN 0.75	22*16*31cm	46*34*33cm	2040
750W	230V / 50HZ	9m	11000l/h	7m	5mm	1",G1",1-1/2"mm	H07RN 1.0	22*16*34cm	46*34*36cm	2040
900W	230V / 50HZ	9.5m	12000l/h	7m	5mm	1",G1",1-1/2"mm	H07RN 1.0	22*16*34cm	46*34*36cm	1950
1100W	230V / 50HZ	10m	13000l/h	7m	5mm	1",G1",1-1/2"mm	H07RN 1.0	22*16*34cm	46*34*36cm	1900

FOR DIRTY WATER


GARDEN
WATER
PUMP



CONTINUOUS WORK DOES
NOT TURN OFF

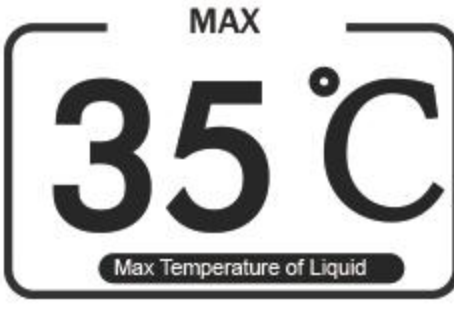


2010007

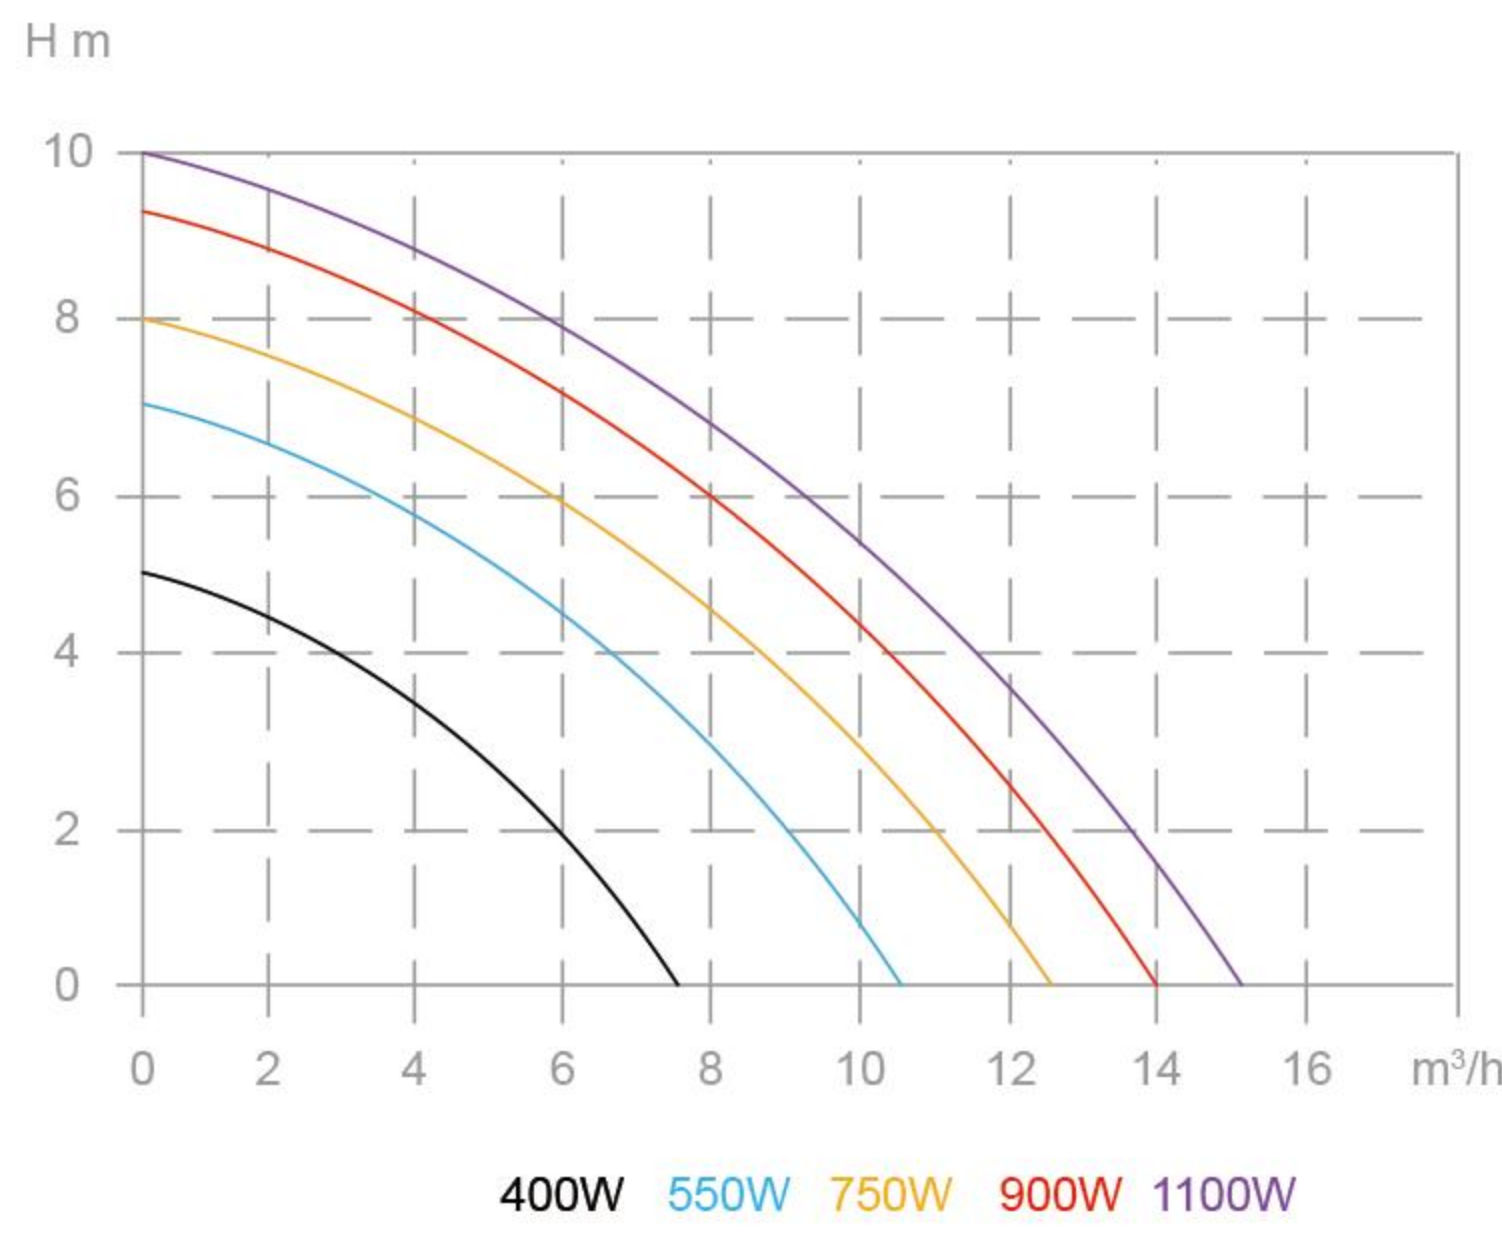

Motor	Voltage / Frequency	Max Head	Max Flow	Max Suct	Inner Diameter	Pipe Diameter	Cable Length _m	Product Size	Packing Size / 4pcs	20"Gp
400W	360V / 50HZ	6m	7500l/h	5m	35mm	1",G1",1-1/2"mm	H05RN 0.75	22*16*31cm	46*34*33cm	2040
500W	360V / 50HZ	7m	10500l/h	7m	35mm	1",G1",1-1/2"mm	H05RN 0.75	22*16*31cm	46*34*33cm	2040
750W	360V / 50HZ	8m	12500l/h	7m	35mm	1",G1",1-1/2"mm	H07RN 1.0	22*16*34cm	46*34*36cm	2040
900W	360V / 50HZ	9m	14000l/h	7m	35mm	1",G1",1-1/2"mm	H07RN 1.0	22*16*34cm	46*34*36cm	1900
1100W	360V / 50HZ	9.5m	15000l/h	7m	35mm	1",G1",1-1/2"mm	H07RN 1.0	22*16*34cm	46*34*36cm	1900
/	/	/	/	/	/	/	/	/	/	/



2010008

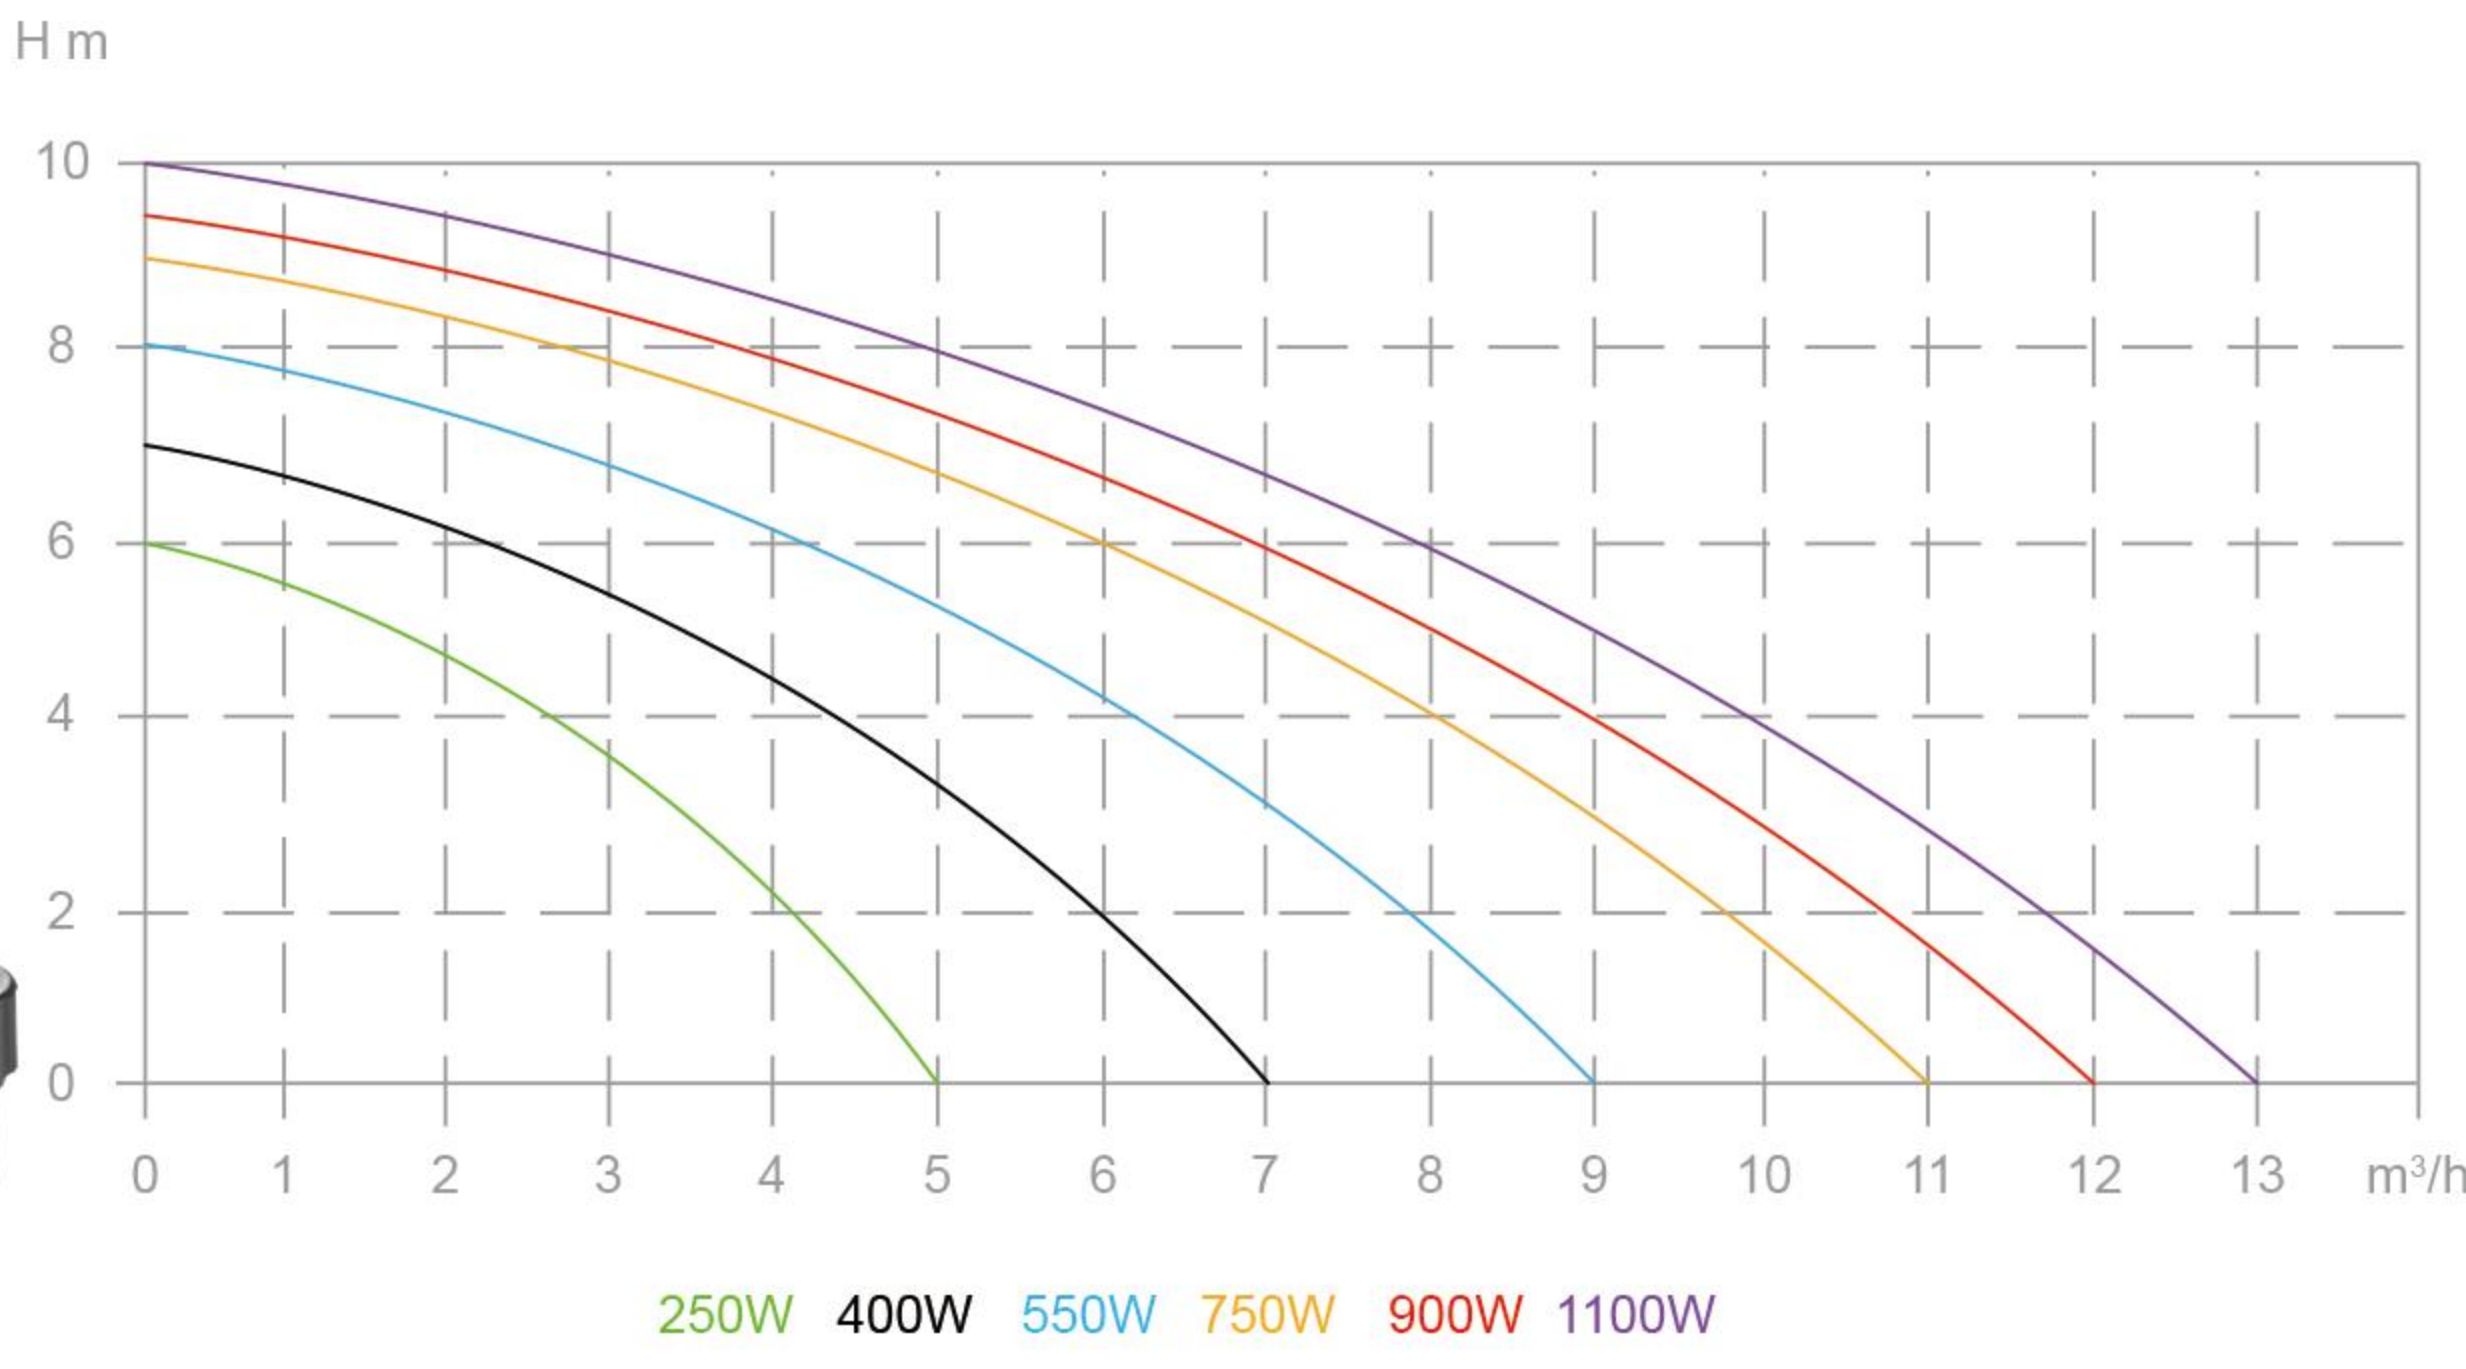


Motor	Voltage / Frequency	Max Head	Max Flow	Max Suct	Inner Diameter	Pipe Diameter	Cable Length _m	Product Size	Packing Size / 4pcs	20"Gp
250W	230V / 50HZ	6m	5000l/h	5m	5mm	1",G1",1-1/2"mm	H05RN 0.75	22*16*31cm	46*34*33cm	2040
400W	230V / 50HZ	7m	7000l/h	7m	5mm	1",G1",1-1/2"mm	H05RN 0.75	22*16*31cm	46*34*33cm	2040
550W	230V / 50HZ	8m	9000l/h	7m	5mm	1",G1",1-1/2"mm	H05RN 0.75	22*16*31cm	46*34*33cm	2040
750W	230V / 50HZ	9m	11000l/h	7m	5mm	1",G1",1-1/2"mm	H07RN 1.0	22*16*34cm	46*34*36cm	2040
900W	230V / 50HZ	9.5m	12000l/h	7m	5mm	1",G1",1-1/2"mm	H07RN 1.0	22*16*34cm	46*34*36cm	1950
1100W	230V / 50HZ	10m	13000l/h	7m	5mm	1",G1",1-1/2"mm	H07RN 1.0	22*16*34cm	46*34*36cm	1900

FOR DIRTY WATER


GARDEN
WATER
PUMP



CONTINUOUS WORK DOES
NOT TURN OFF

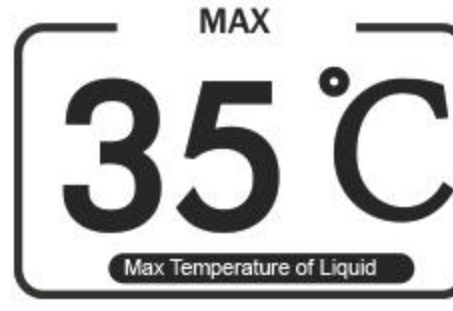


2010009

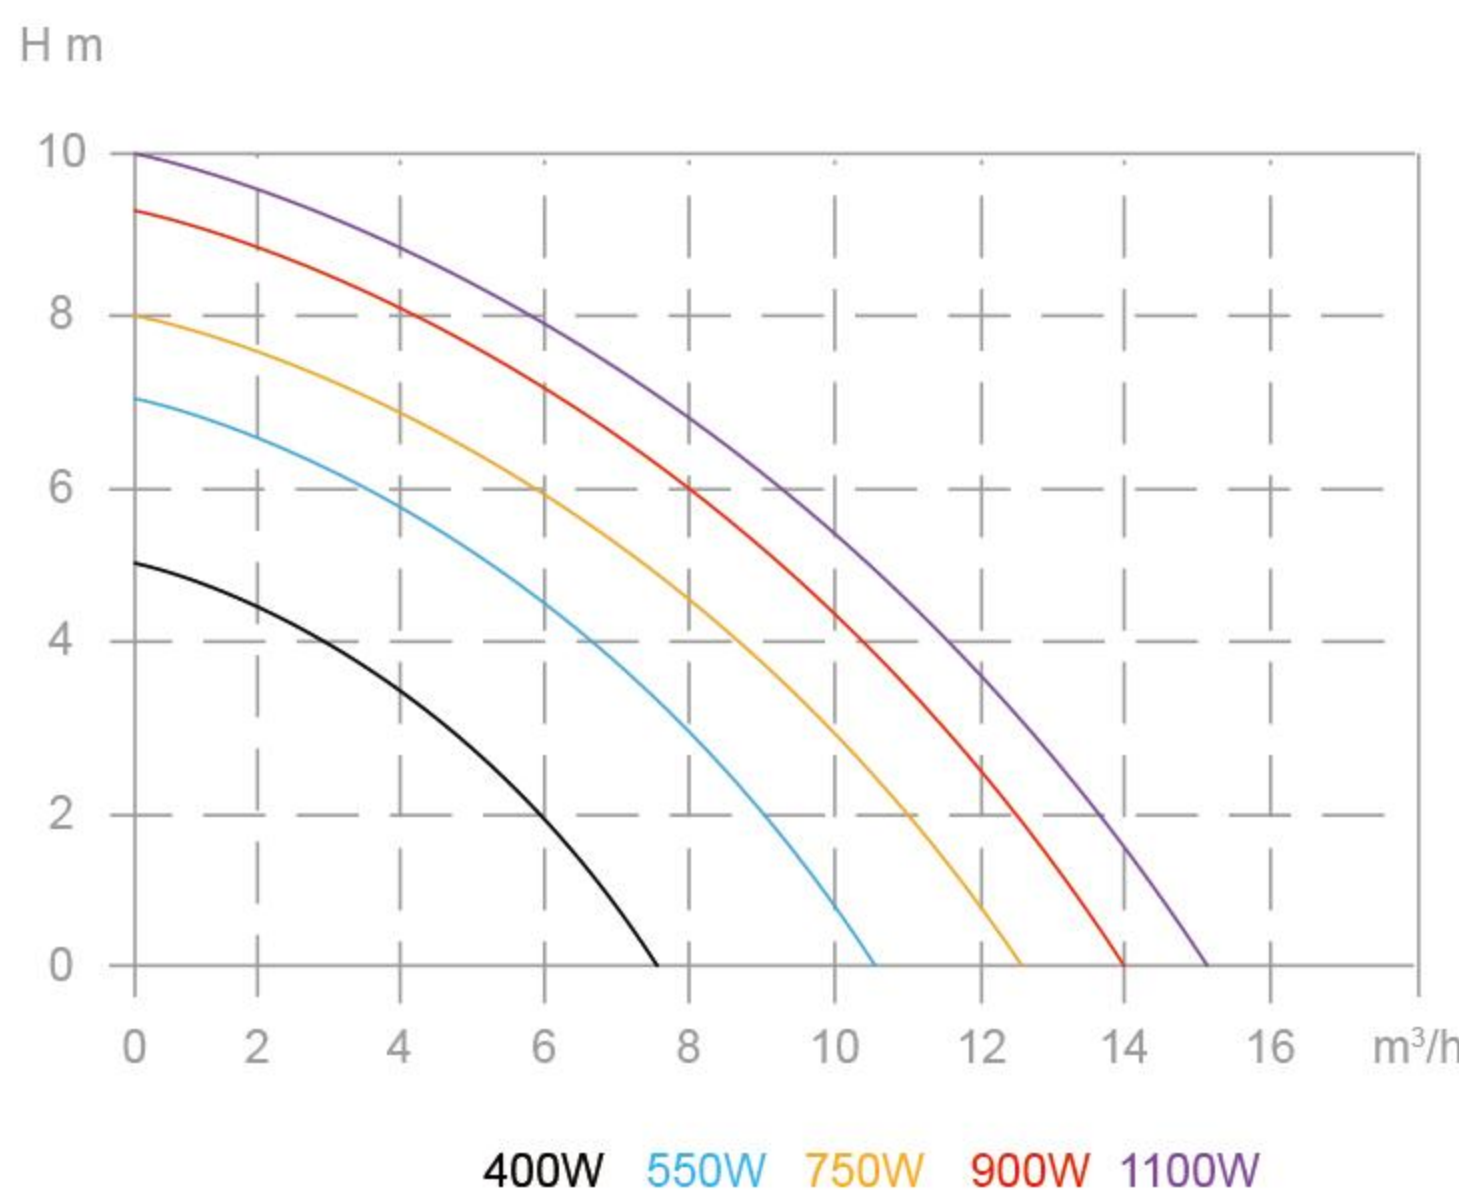

Motor	Voltage / Frequency	Max Head	Max Flow	Max Suct	Inner Diameter	Pipe Diameter	Cable Length _m	Product Size	Packing Size / 4pcs	20"Gp
400W	230V / 50HZ	5m	7500l/h	5m	35mm	1",G1",1-1/2"mm	H05RN 0.75	22*16*34cm	46*34*36cm	2040
550W	230V / 50HZ	7m	10500l/h	7m	35mm	1",G1",1-1/2"mm	H0RN5 0.75	22*16*34cm	46*34*36cm	2040
750W	230V / 50HZ	8m	12500l/h	7m	35mm	1",G1",1-1/2"mm	H0RN7 1.0	22*16*37cm	46*34*38.5cm	2040
900W	230V / 50HZ	9m	14000l/h	7m	35mm	1",G1",1-1/2"mm	H07RN 1.0	22*16*37cm	46*34*38.5cm	1900
1100W	230V / 50HZ	9.5m	15000l/h	7m	35mm	1",G1",1-1/2"mm	H07RN 1.0	22*16*37cm	46*34*38.5cm	1900
/	/	/	/	/	/	/	/	/	/	/



2010010

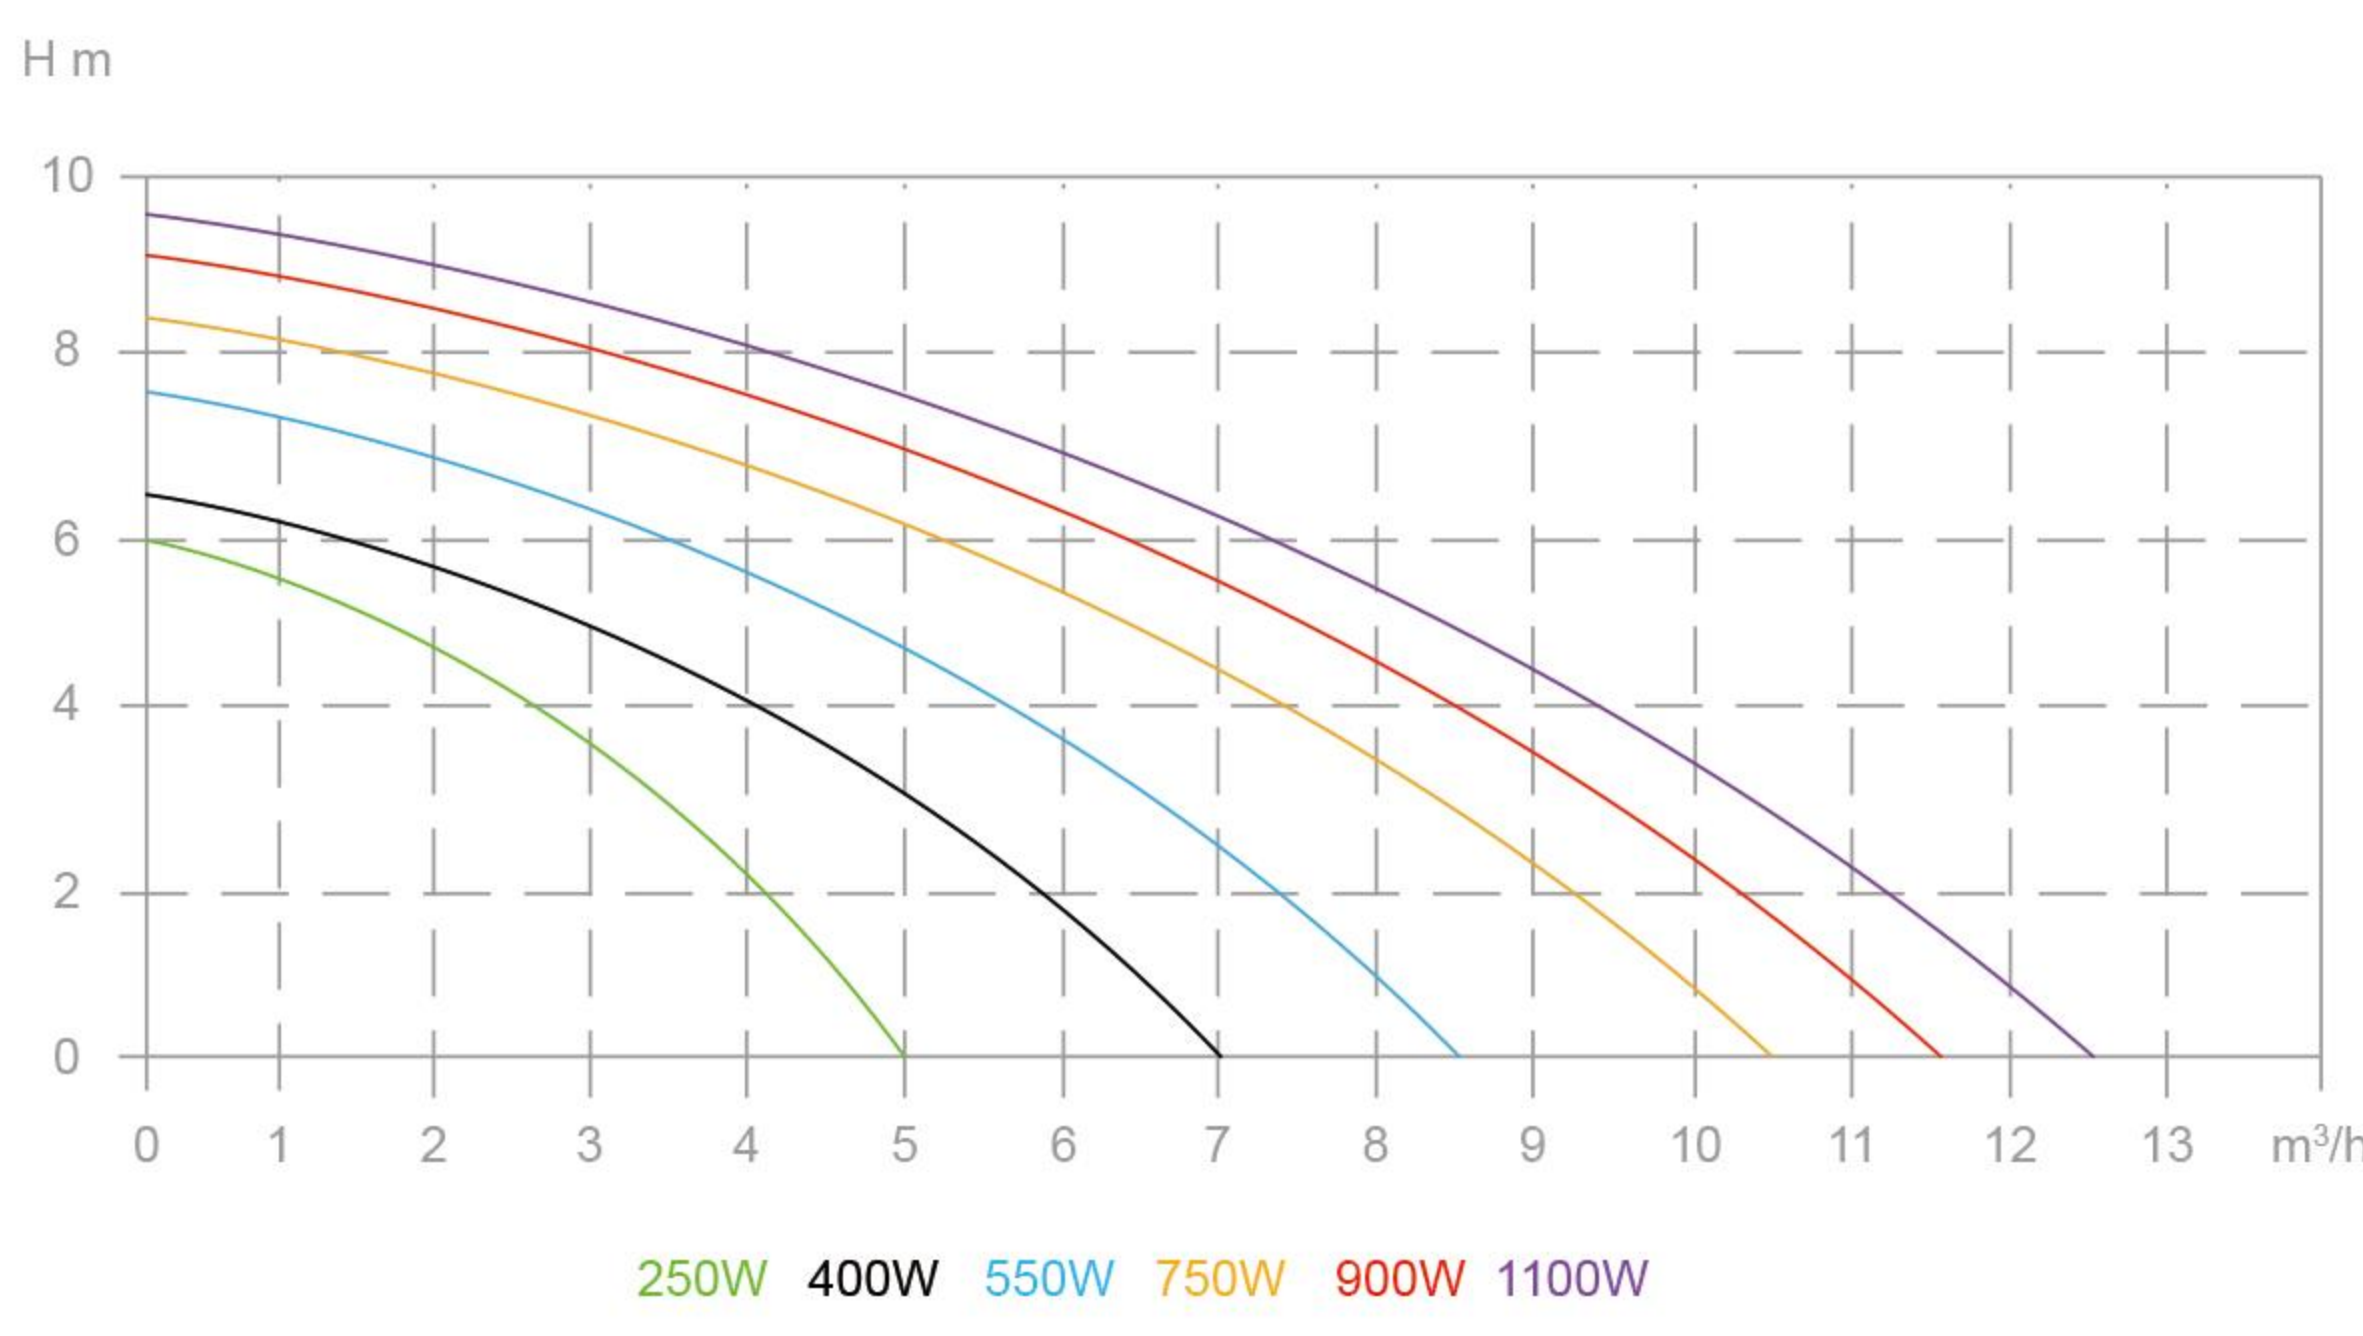


Motor	Voltage / Frequency	Max Head	Max Flow	Max Suct	Inner Diameter	Pipe Diameter	Cable Length _m	Product Size	Packing Size / 4pcs	20"Gp
250W	230V / 50HZ	6m	5000l/h	5m	5mm	1",G1",1-1/2"	H05RN 0.75	22*18*31cm	46*38*33cm	2300
400W	230V / 50HZ	6.5m	7000l/h	7m	5mm	1",G1",1-1/2"	H05RN 0.75	22*18*31cm	46*38*33cm	2300
550W	230V / 50HZ	7.5m	8500l/h	7m	5mm	1",G1",1-1/2"	H05RN 0.75	222*18*31cm	46*38*33cm	2300
750W	230V / 50HZ	8.5m	10500l/h	7m	5mm	1",G1",1-1/2"	H07RN 1.0	22*18*31cm	46*38*36cm	2040
900W	230V / 50HZ	9m	11500l/h	7m	5mm	1",G1",1-1/2"	H07RN 1.0	22*18*31cm	46*38*36cm	2040
1100W	230V / 50HZ	9.5m	12500l/h	7m	5mm	1",G1",1-1/2"	H07RN 1.0	22*18*31cm	46*38*36cm	2040

1

MULTI
FUNCTION

TRACTOR


GEAR DRIVEN
MULTI-FUNCTIONAL
MACHINE

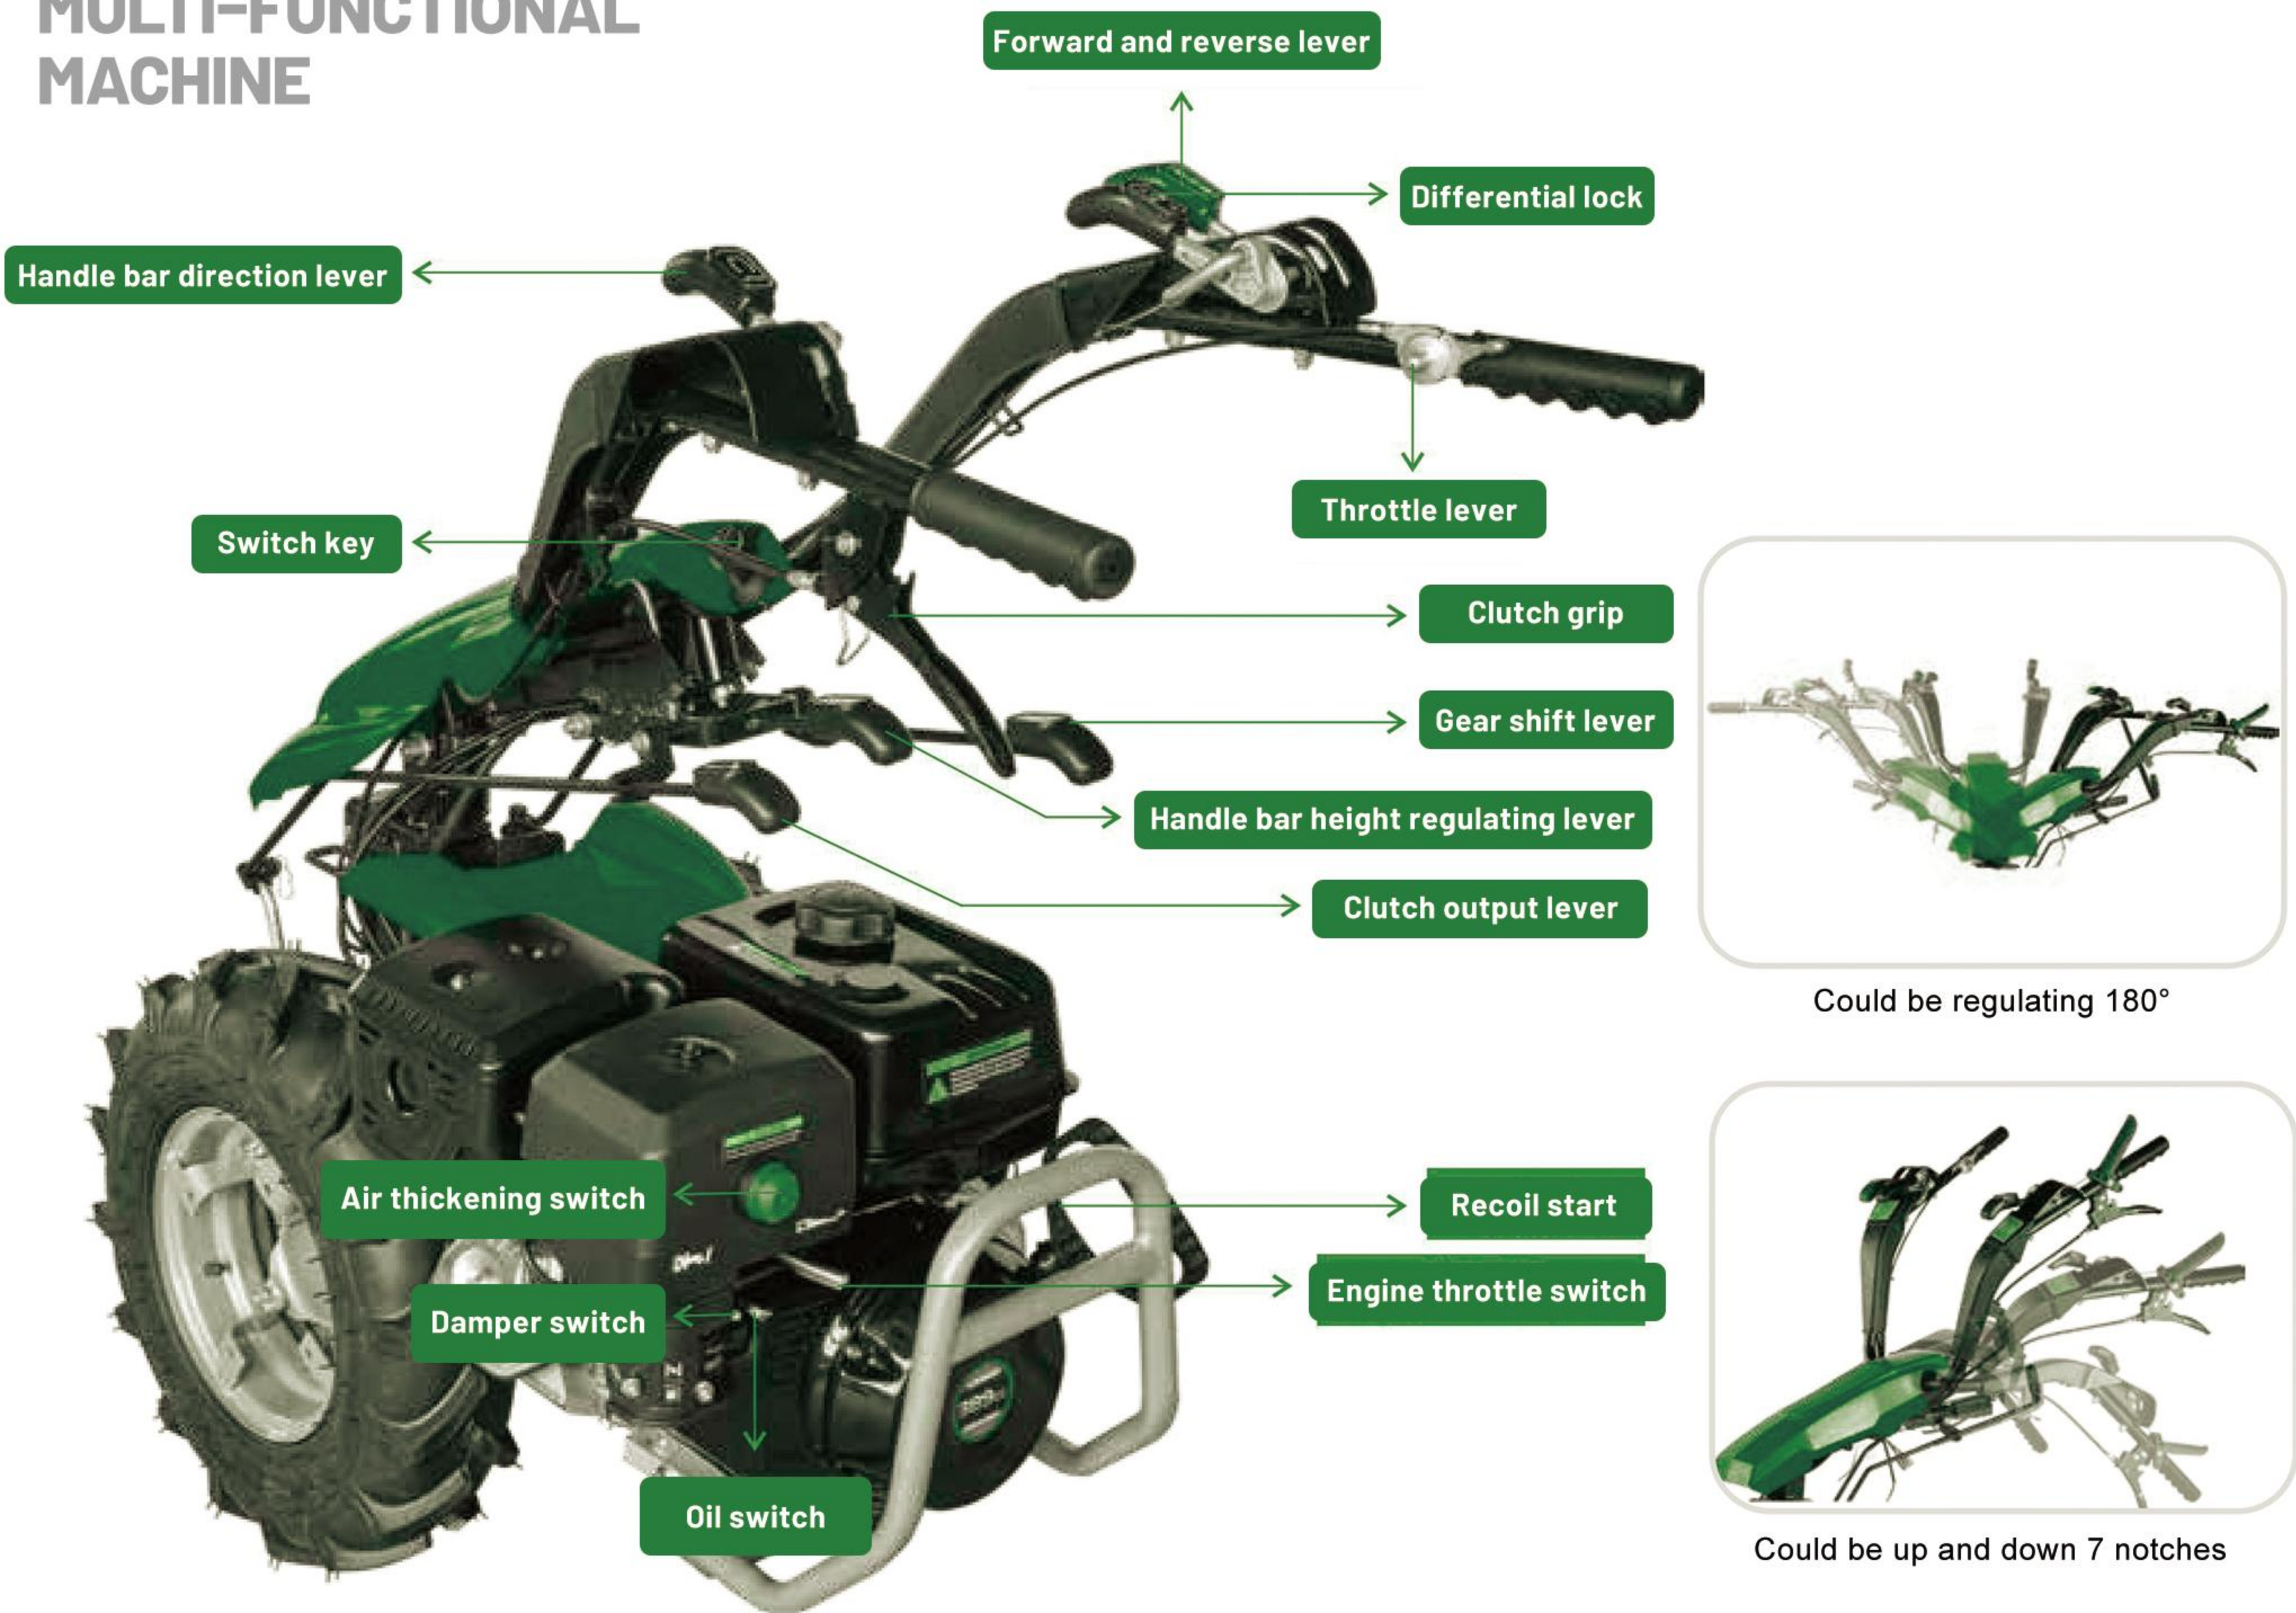

1030025

Output Power	15.0hp	14.0hp	15.0hp	15.0hp	15.0hp
Displacement	420cc	429cc	420cc	420cc	420cc
Oil Tank Capacity	6.5L	7.3L	6.5L	6.5L	6.5L
Hours per tank	3.0-4.0H				
Fuel Type	gasoline				diesel
Oil Type	4 Stroke Antifreeze Oil				
Gear Oil Type	SEA 80W90				
Start Mode	recoil+electric start				
Transmission Type	gear transmission				
clutch Mode	dry clutch or hydraulic wet clutch				
Gear Shift	3 forward+3 reverse or 3 forward+2 reverse				
Speed	3F+2R, F1:1.18, F2:2.76, F3:12.67/R1:1.24, R2:2.91kph/3F+3R, F1:1.30, F2:3.00, F3:4.40/R1:1.4, R2:3.2, R3:4.7kph				
TyreType	500-10/400-10/Triangle Track				
Emergency stop Switch	Optional				
Heat Grip	Optional				
Snow Tyres	Optional				
Lamp	Optional				
Seat	Optional				
Packing	Crate				
G.W./N.W.	132/122kg				

GEAR DRIVEN MULTI-FUNCTIONAL MACHINE

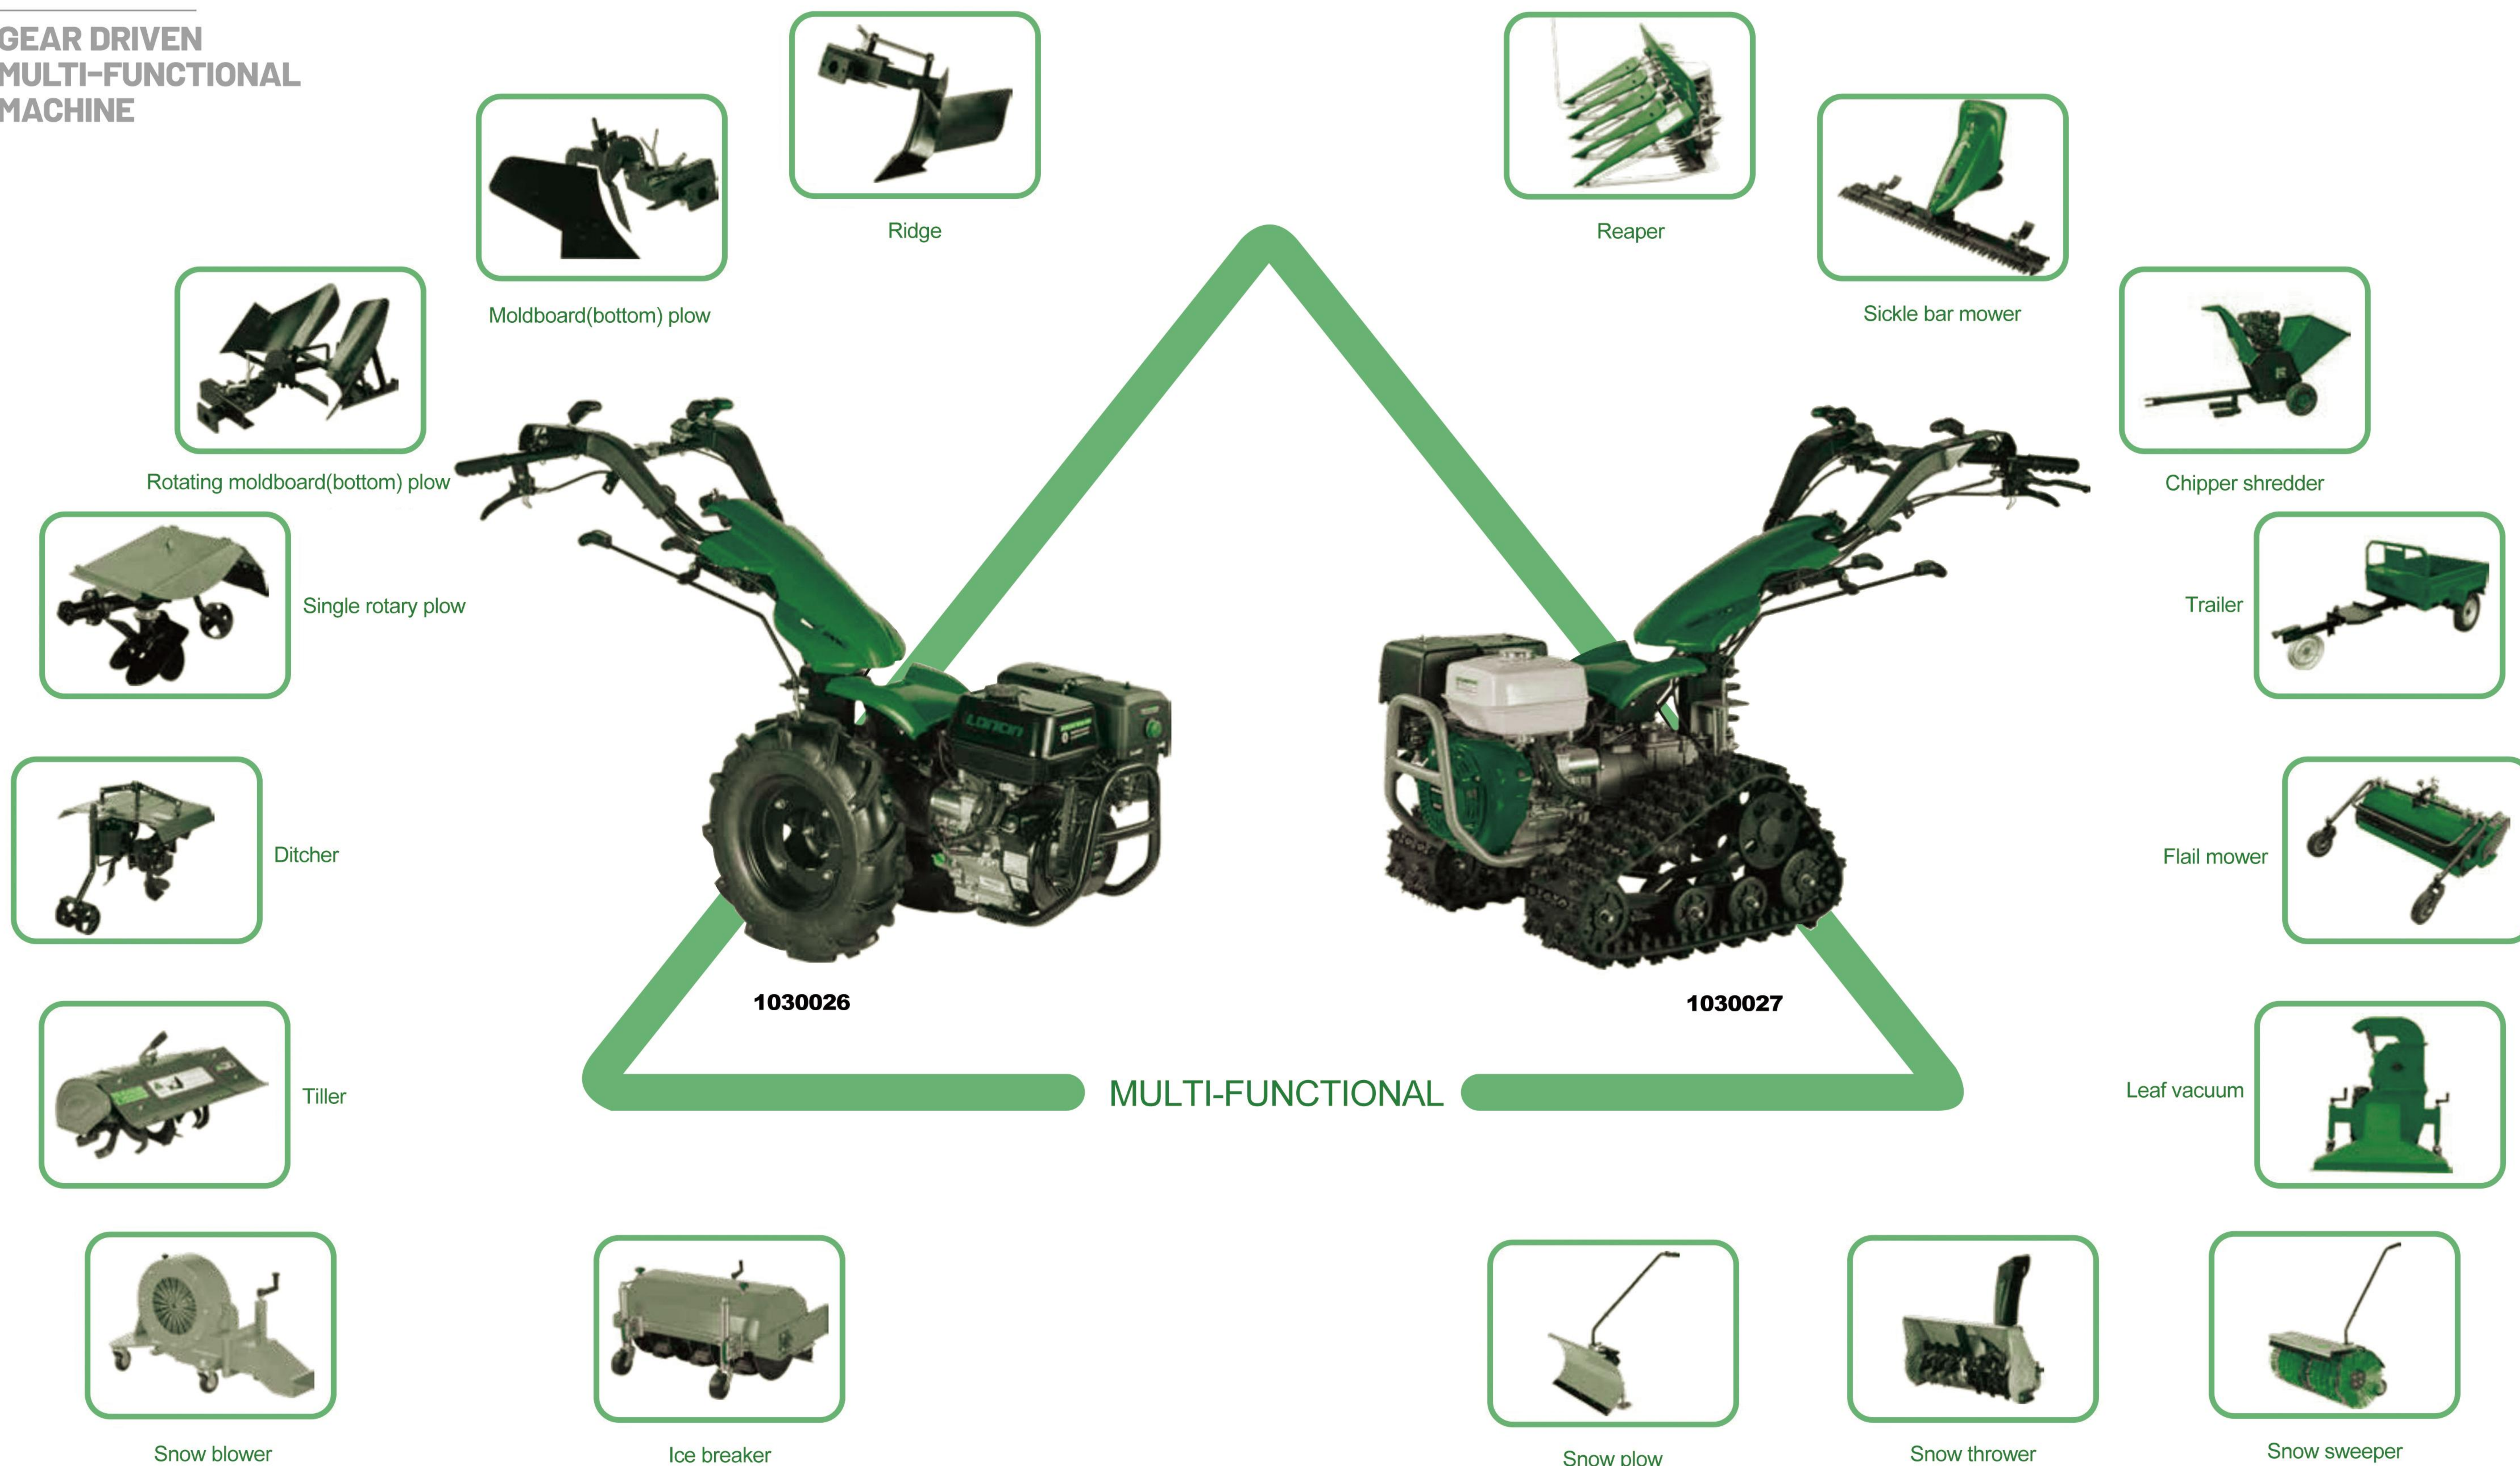


Accessory
Quick
Connect

360° Adjustable
Hand grip
Direction


Use in Multiple
Scenarios

Low Power
Consumption
&
Longbattery Life

MULTI-FUNCTION
TRACTOR

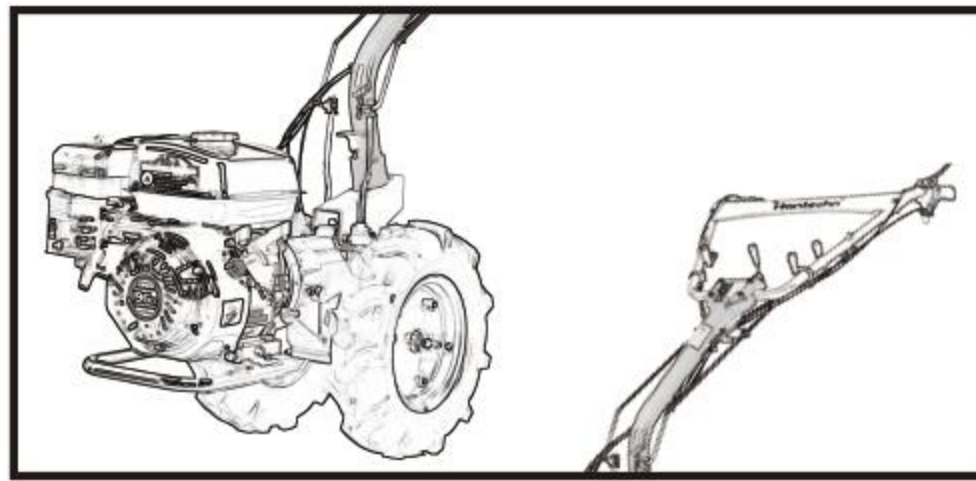

Brand New Design

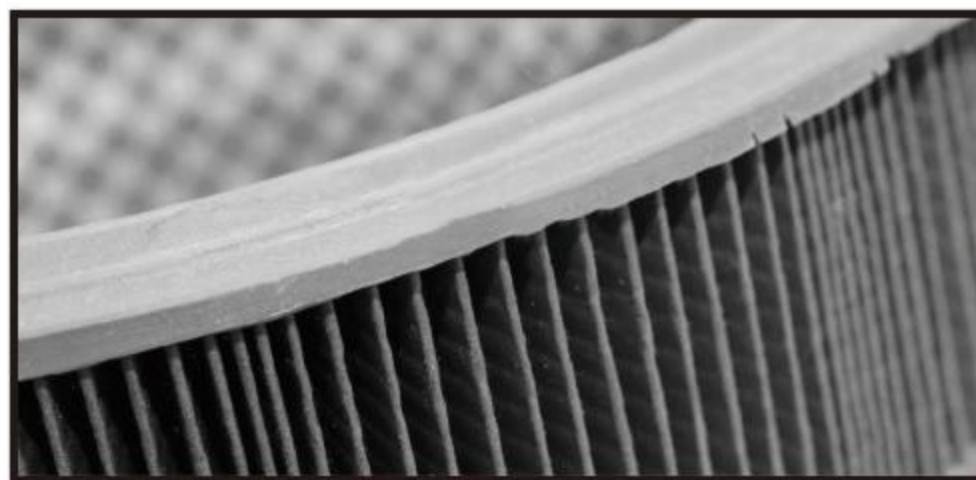

Exclusive Filter Design



Brand Power System

MULTI-FUNCTION
TRACTOR



1030028a
Moldboard Plow

Metal Wheels Diameter	420mm
Distance Between Two Wheels Outside	Max:700 Min:370
Ridger Width	300 mm
Net Weight	22.5 kg
Meas.(cm)	49*44.5*34.5
Type Of Packing	Kraft Carton
QTY. (20', 40', 40'HC)	366 / 672 / 784
Certification	CE
/	/

1030028b
Snow Blade

Shovel Snow Speed	Low: 1.5km / h Fast: 3.7km / h
Shovel Snow Width	850 mm
Steering Angle	±25°
Adjust Height	0-50 mm
Net Weight	22.5 kg
Meas. (cm)	92.5*46.5*20.5
Type Of Packing	Kraft Carton
QTY. (20', 40', 40'HC)	330/682/806
Certification	CE
/	/

1030028c
Sickle Bar Mower

Cutting Width	970 mm
Cutting Height	20-60 mm
Reciprocating Speed	920 t / min
Net Weight	30 kg
Meas.(cm)	Blade : 100 * 21.5 * 9 Gearbox & Shield : 43 * 37 * 20.5
Type Of Packing	Kraft Carton
QTY. (20', 40', 40'HC)	575 / 1150 / 1250
Certification	CE
/	/



1030028
TECHNICAL KEY DATA

Engine	Air-Cooled OHV, 4-Stroke, Horizontal, Single Shaft
Max Output (HP/KW/rpm)	6.5/4.0/3600
Fuel Tank Capacity(L)	3.6
Engine Oil Capacity(L)	0.6
Gear Box Material	AL - ALLOY
Transmission Type	Gear
Transmission	2F + 2R
PTO Speed (rpm)	920/675
Tire Size (if available)	4.00-8(420mm)
Axle Diameter (mm)	25
Clutch Type	By Friction
Adjustable Handle	In height and sideways
Differential Mechanism	No
Steering Brake	No
Net Weight (kg)	57
Meas (cm)	87*46*82.5
Type Of Packing	Kraft Carton
QTY. (20', 40', 40'HC)	64/130/201
Certification	CE



1030028d
Snow Thrower

Max Throwing Distance	6 m
Max Working Width	56 cm
Max Working Thickness	51 cm
Chute Rotating Angle	270°
Net Weight	35.2 kg
Meas.(cm)	63*51*57.5
Type Of Packing	160 / 328 / 328
Certification	CE
/	/

1030028e
Power Sweeper

Rotary Cylindrical Diameter	320 mm
Rotary Cylindrical Width	900 mm
Rotary Cylindrical Speed	400 rpm
Adjust Height	0-50 mm
Steering Angle	±25°
Net Weight	38.1kg
Meas.(cm)	97*52*38
Type Of Packing	Kraft Carton
QTY. (20', 40', 40'HC)	120/240/288
Certification	CE
/	/

1030028f
Rear Tine Tiller

Tilling Width	620 mm
Blade Sets	6 set
Tines Diameter	310 mm
Tilling Depth	200 mm
Tilling Speed	320 rpm
Net Weight	28.1kg
Meas. (cm)	58*55*37.5
Type Of Packing	Kraft Carton
QTY. (20', 40', 40'HC)	64 / 130 / 201
Certification	CE
/	/

Accessory
Quick
Connect

360° Adjustable
Hand grip
Direction

Use in Multiple
Scenarios

Low Power
Consumption
&
Longbattery Life



MULTI-FUNCTION TRACTOR

FUEL EFFICIENT
15%
(Compared to other brands)

72
CONTINUOUS WORK DOES
NOT TURN OFF



standard quick interface
long battery life
all terrain available
multi-purpose machine

1030029


TECHNICAL KEY DATA

Engine	Single Cylinder, Air-Cooled OHV, 4-Stroke, Horizontal, Single Shafts
Max Output (HP/KW/rpm)	13-15/9.6-11/3600
Fuel Tank Capacity(L)	6
Engine Oil Capacity(L)	1.1
Gear Box Material	AL - ALLOY
Transmission Type	Gear
Transmission	3F + 3R
PTO Speed (rpm)	990
Tire Size (if available)	5.00-10(500mm)
Axle Diameter (mm)	25
Clutch Type	Hydro-mechanical Wet Clutch
Adjustable Handle	In height and sideways
Differential Mechanism	Yes
Steering Brake	Yes
Net Weight (kg)	105
Meas (cm)	110*65*85
Type Of Packing	Wooden Box
QTY. (20', 40', 40'HC)	36/72/108
Certification	CE

MULTI-FUNCTION TRACTOR



1030029a
Plow / Ridger

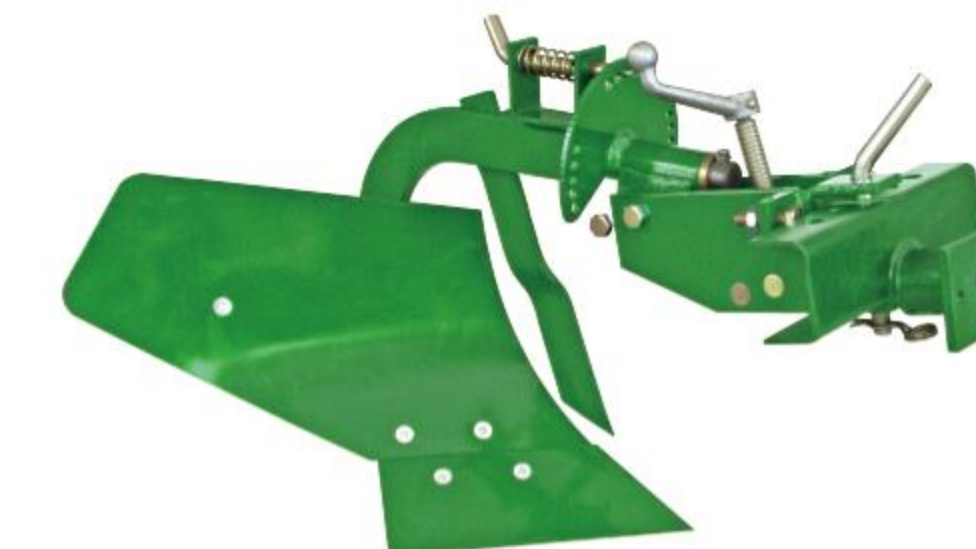

1030029b
Moldboard (Bottom)
Plows



1030029c
Snow Blade

Net Weight	15.2 kg	Net Weight	15.2 kg	Shovel Snow Speed (km/h) I: 1.3 II: 3.1 III: 4.5	
Meas.(cm)	64*18*45	Meas.(cm)	48.5*26.5*46	Shovel Snow Width 920 mm	
Type Of Packing	Kraft Carton	Type Of Packing	Kraft Carton	Steering Angle ±25°	
QTY. (20', 40', 40'HC)	65 / 985 / 1170	QTY. (20', 40', 40'HC)	512/1032/1160	Net Weight 35.3kg	
/	/	/	/	Meas.(cm) 96*36*19	
 1030029d <i>Plow</i>				Type Of Packing Kraft Carton	
				QTY. (20', 40', 40'HC) 456 / 912 / 1064	
				Certification CE	
				/	/
				/	/



1030029d
Plow



1030029e
Sickle Bar Mower



1030029f
Snow Thrower



1030029g
Power Sweeper



1030029h
Rear Tine Tiller

Cutting Width	1200 mm	Max Throwing Distance	6 m	Rotary Cylindrical Diameter	500 mm	Tilling Width	600 / 800 mm
Cutting Height	20-60 mm	Max Working Width	72/102 cm	Rotary Cylindrical Width	1200 mm	Blade Sets	6 set
Reciprocating Speed	990 t / min	Max Working Thickness	51 cm	Rotary Cylindrical Speed	290 rpm	Tines Diameter	310 mm
Net Weight	41.5 kg	Chute Rotating Angle	270°	Adjust Height	0-50 mm	Tilling Depth	200mm
Meas. (cm)	Blade: 130*23*10 Gearbox & Shield: 44*41*23	Net Weight (kg)	70cm: 62 102cm: 75	Steering Angle	±15°	Tilling Speed	290 rpm
Type Of Packing	Kraft Carton	Meas. (cm)	70cm: 62*51*52 102cm: 107*61*62	Net Weight	83.9 kg	Net Weight	35 kg
QTY. (20', 40', 40'HC)	400/800/960	Type Of Packing	Kraft Carton	Meas. (cm)	121*77*70.5	Meas. (cm)	85*56*40
Certification	CE	QTY. (20', 40', 40'HC)	70cm: 75/156/208 102cm: 57/123/162	Type Of Packing	Kraft Carton	Type Of Packing	Kraft Carton
/	/	Certification	CE	QTY. (20', 40', 40'HC)	39/84/84	QTY. (20', 40', 40'HC)	140 / 280 / 336
/	/	/	/	Certification	CE	Certification	CE
/	/	/	/	/	/	/	/

PTA POWER TOOLS
ACCESSORIES

H10001



Type: chamfering drill bit
Use: Wood Drilling
Finish: Black Oxide

H10002



Material: HIGH SPEED STEEL
Coating: TiAlN

H10003



Material: HIGH SPEED STEEL
Coating: AlTiN, TiAlN, TiCN, Tin

H10004



Material: HIGH SPEED STEEL
Coating: AlTiN, TiAlN, TiCN, Tin

H10005



Type: chamferer bit
Use: Wood Drilling
Finish: Black Oxide

H10006



Type: pagoda drill
Use: Wood Drilling
Finish: Plain

H10007



Type: two step drill bit
Use: Wood Drilling
Finish: Other

H10008



Type: drill and tap bit
Use: Masonry Drilling
Finish: ZINC

H10009



Material: HIGH SPEED STEEL
Coating: TiAlN



Type:TAP



Type:drill and tap bit
Use:Masonry Drilling
Finish:ZINC



Type:step drill cobalt
Use:Metal Drilling
Finish:Black Oxide, ZINC



Power:Manual



Drill Type:Inch Maintenance Length Drill Bits
Shank Type:4MT Taper-Shank, 2MT Taper-Shank, HEX
Point Angle:120°, 118°, 135°, 140°
Surface Finish:Longer Life TiCN, Bright(Uncoated), Super Life TiAlN



Type:Center Drill Bit, Twist Drill Bit
Use:PCB Drilling
Finish:Other



Material:HIGH SPEED STEEL
Coating:AlTiN



Type:glass drill bit set
Use:Masonry Drilling
Finish:Black Oxide
Application:Drilling Holes
Usage:High Speed Drilling



Type:woodworking drill bit set
Use:Wood Drilling
Finish:Black Oxide



Grade:DIY, Industrial
Drive Size:1 1/2IN, 3/4IN, 1/2in, 3/8in, 2 1/2IN, 1/4in, 1in
Socket Features:HexHex, Double Square, HEX, Security Torx



Type:glass drill bit set
Use:Masonry Drilling
Finish:Black Oxide
Application:Drilling Holes
Usage:High Speed Drilling



Type:cobalt twist drill bits
Use:Wood Drilling
Finish:ZINC



Type:Twist Drill Bit
Use:Metal Drilling
Finish:Other



Type:door hinge drill bit
Use:Metal Drilling



Outside Diameter:1 1/2IN, 3in, 19/32in, 13/16in
Type:TAP



Application:Steel
Drill Type:Inch Maintenance Length Drill Bits
Shank Type:4MT Taper-Shank, HEX
Point Angle:120°, 118°, 135°, 140°
Surface Finish:Longer Life TiCN, Bright(Uncoated), Super Life TiAlN



Type:two step drill bit
Use:Wood Drilling
Finish:Other



Grade:Industrial
Application:Not Rated
Drive Size:1/2in
Socket Features:HexHex, HEX
Finish:Black Phosphate



Grade:Industrial
Drive Size:1/2in
Socket Features:Hex
Finish:Black Phosphate, Satin



Grade:DIY, Industrial
Warranty:1 year
Application:Not Rated
Drive Size:3/4IN
Socket Features:HEX
Finish:Black Phosphate




Grade:DIY, Industrial
Warranty:1 year
Drive Size:3/4IN
Socket Features:HEX
Finish:Black Phosphate



Grade:Industrial
Warranty:1 year
Drive Size:1/2in
Socket Features:HexHex, HEX



Grade:DIY, Industrial
Max Torque Capacity:30lb-in
Material:Stainless steel
Measurement system:Metric

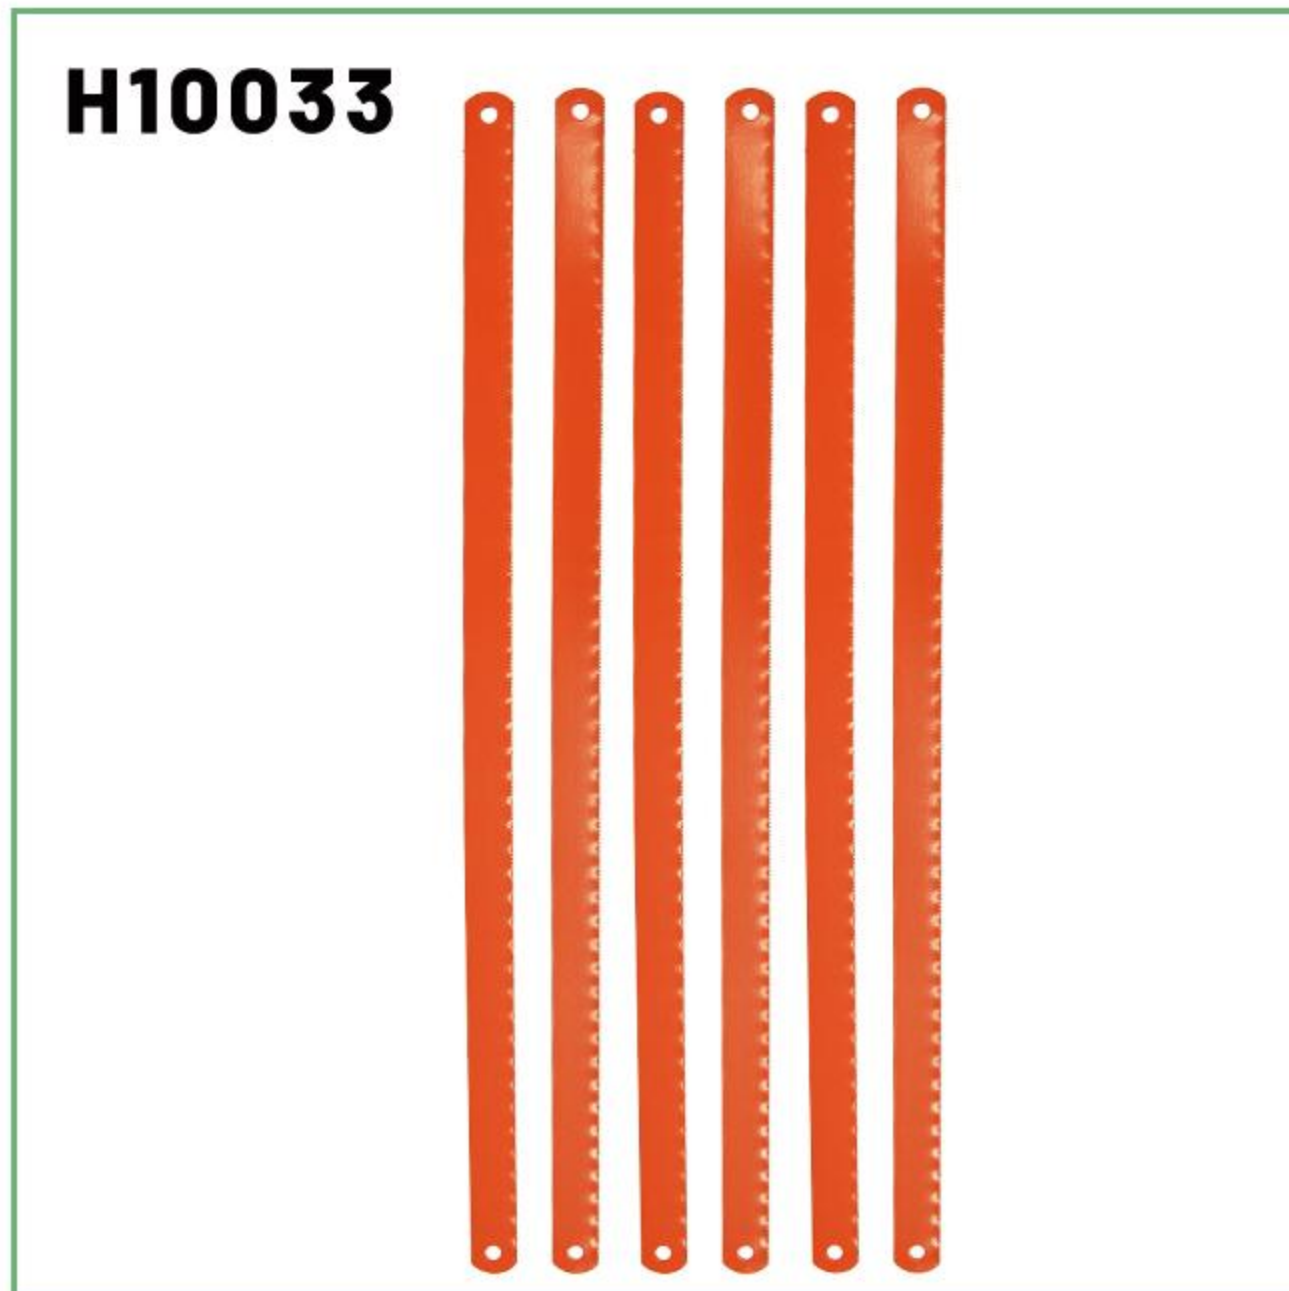

Blade Length:12in
Teeth Material:high-speed steel,Milling teeth
Material:M2+6150,M42+D6A
Colour:orange





Measurement system:Metric
Application:Fiberboard, Flakeboard, PIPE, Plaster, Tube, Plywood
Tip Material:Carbon steel
Arbor Type:With Built-In Arbor & Integral Pilot



Arbor Size:7/8IN, 10mm, 5/8in
Teeth per Inch:10, 24
Teeths:140, 144
Blade Length:6in, 6 1/2in, 10in
Blade Diameter:18in, 12in
Edge Height:0.315in(8mm), 0.472in(12mm)



Application:Wood, Drywall, Ceiling Tile, Metal, PVC, Plastic
Teeth per Inch:9, 18, 8, 7, 6, 10, 24
Material:Diamond
Blade Length:50mm
Blade Diameter:18in, 12in
Dimensions:50mm
Weight:0.5kg

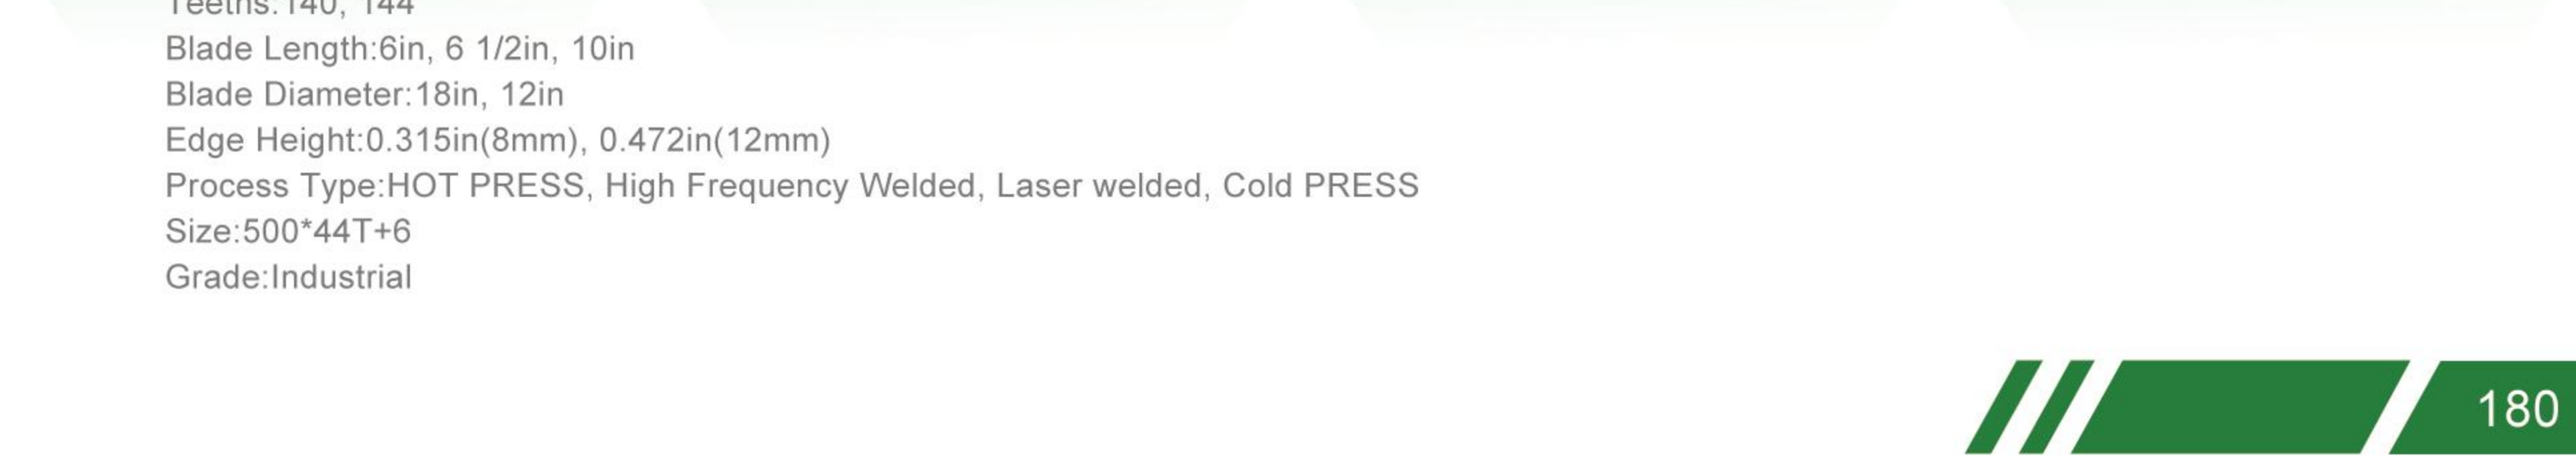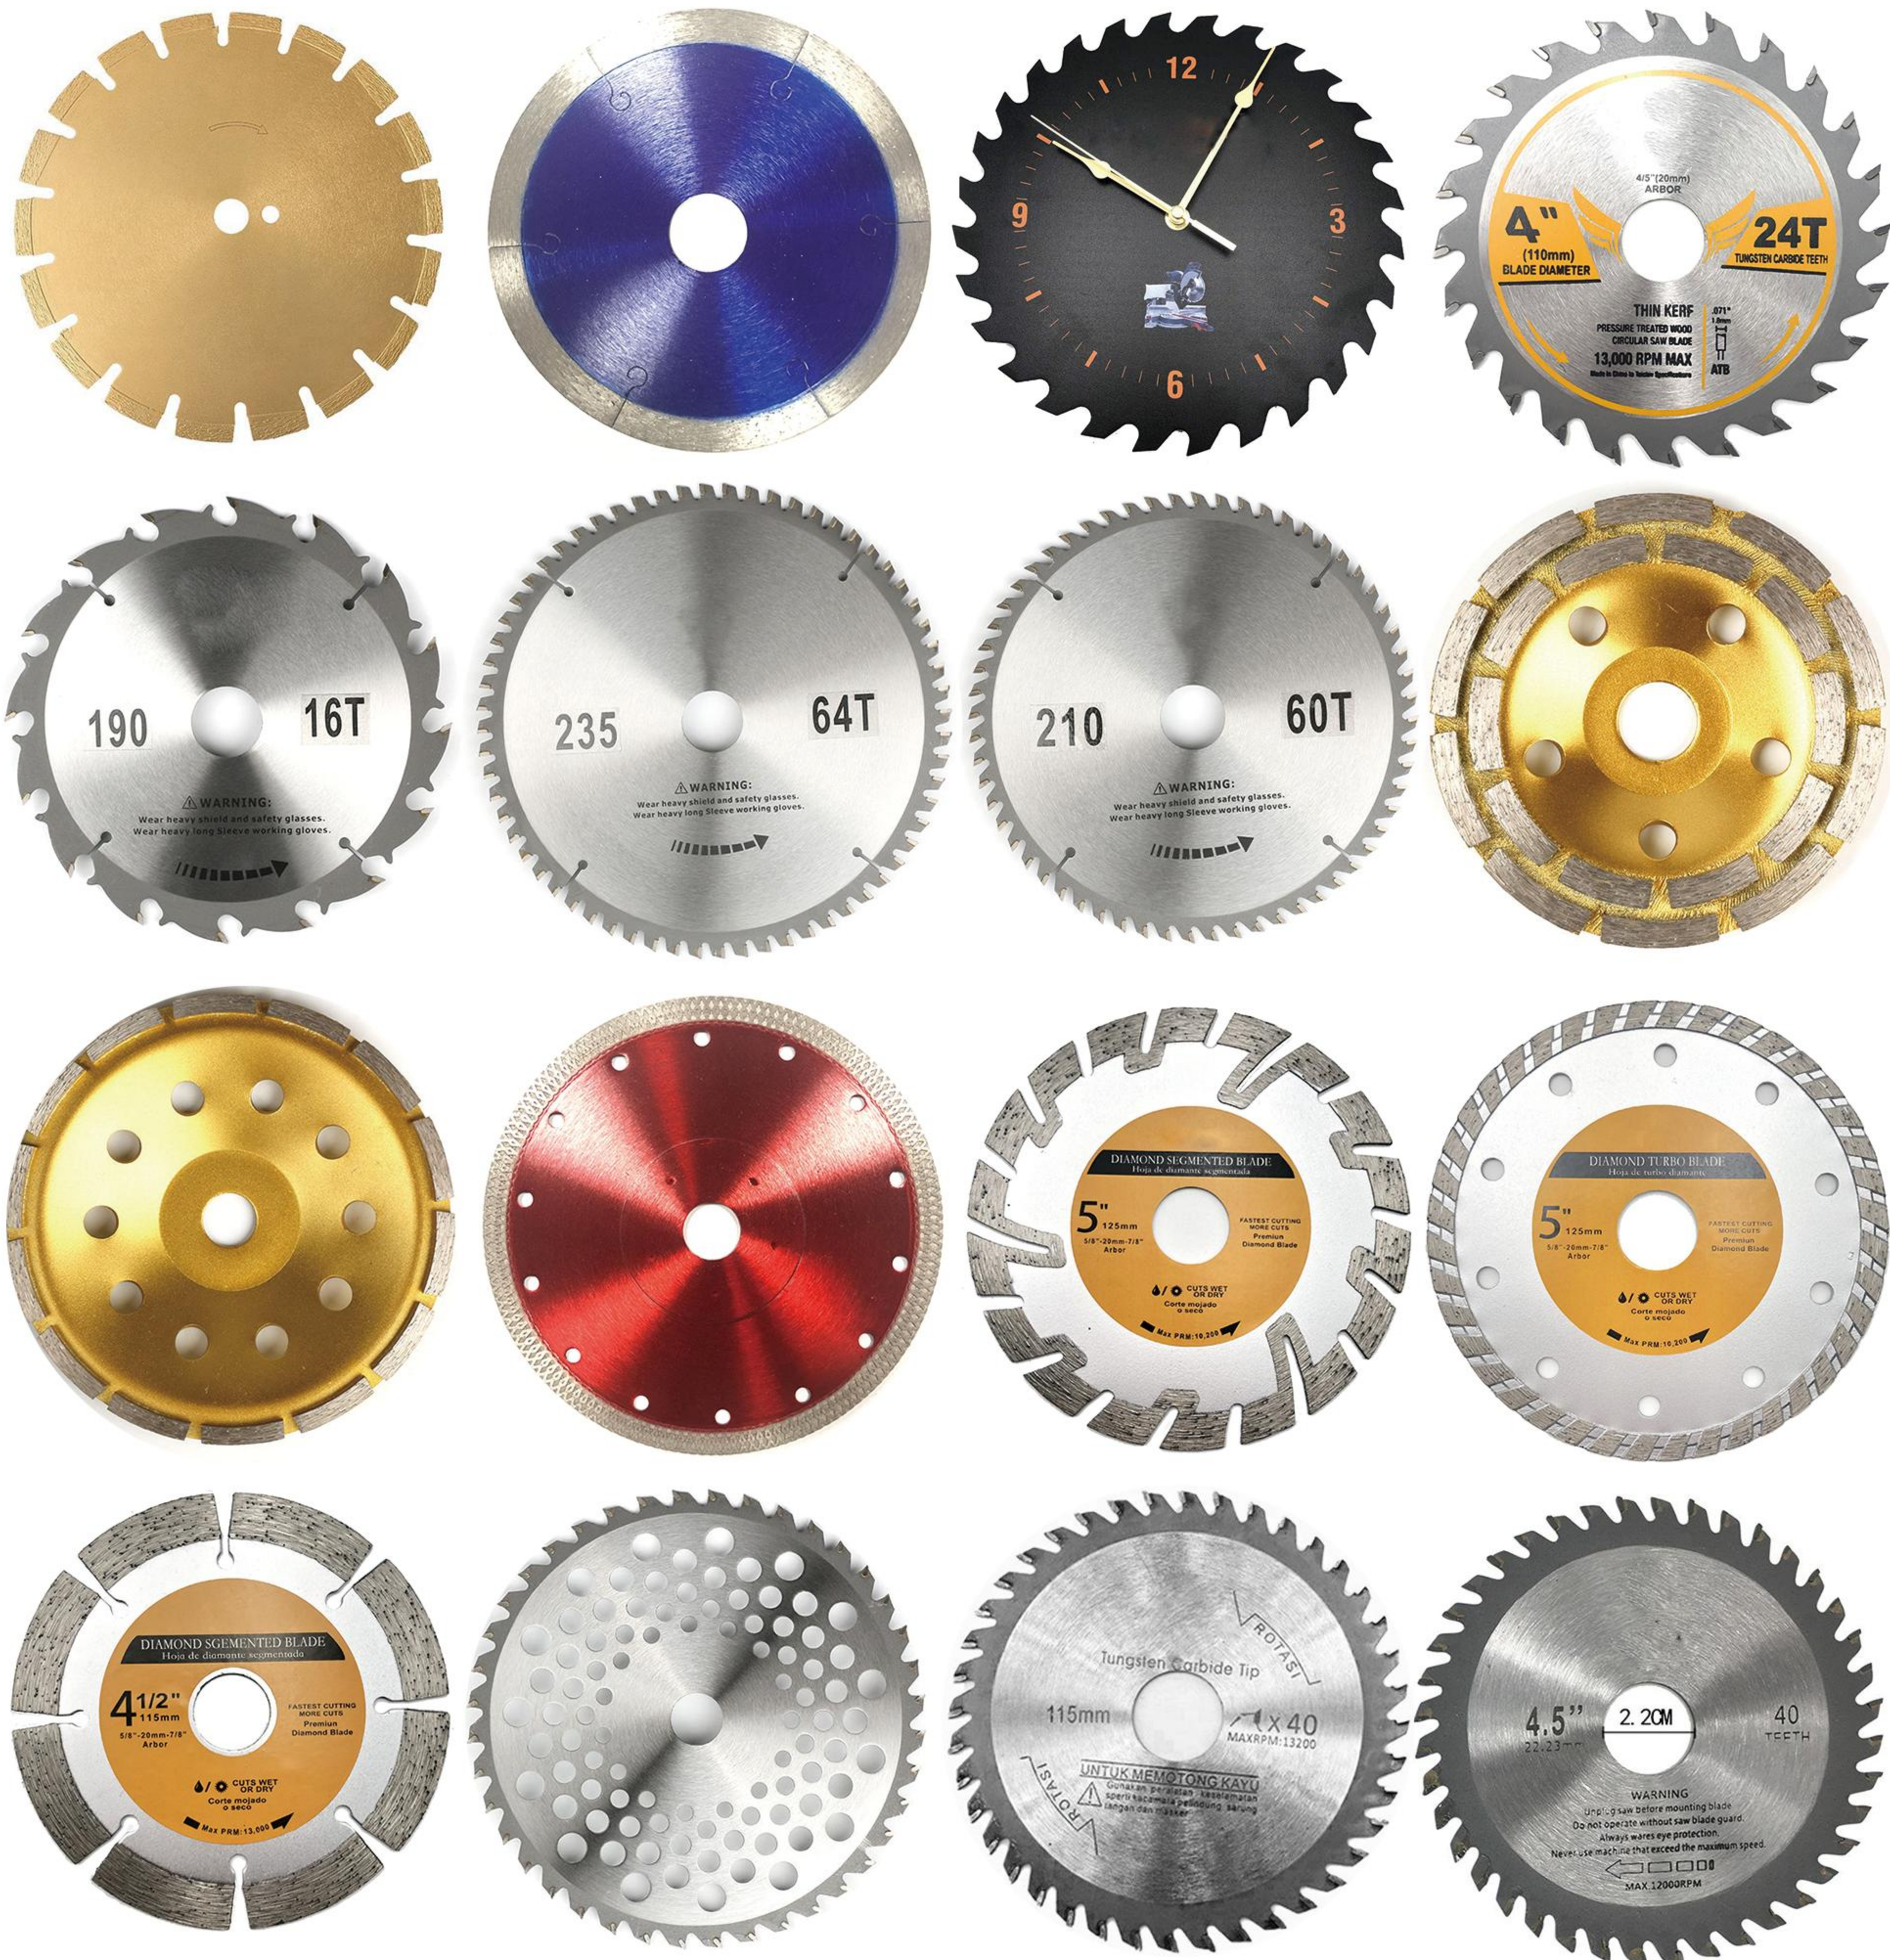

H10037
Blade Thickness:0.014in, 0.032in, 0.05in, 0.02in, 0.035in, 0.018in, 0.042in, 0.025in
Blade Width:1 1/2IN, 3/4IN, 1/2in, 1 1/4IN, 5/8in, 3/8in, 1/8IN, 1/4in, 1in, 3/16in
Arbor Size:7/8IN, 10mm, 5/8in
Teeth per Inch:10, 24
Teeths:140, 144
Blade Length:6in, 6 1/2in, 10in
Blade Diameter:18in, 12in
Edge Height:0.315in(8mm), 0.472in(12mm)
Process Type:HOT PRESS, High Frequency Welded, Laser welded, Cold PRESS
Size:500*44T+6
Grade:Industrial

SUPER THIN CUTTING WHEEL



Product Advantages

- long durability
- Very sharp
- Cost effective
- Less heat generated
- Less noise

Application

- Solid material
- Tubes
- Unalloyed and alloyed construction steel
- High alloy special steel
- Angular steel profiles

H10038							
Dimension (D*T*H)	Dimension (D*T*H)	shape	Speed (R.P.M)	Speed (m/s)	PCS/ Shink Wrap	PCS/ Inner box	PCS/ Inner box
75x0.8x10	75x0.8x10		20100	80	25	50	800/1200
75x1.6x10	75x1.6x10		20100	80	25	50	800/1200
105x1.0x16	105x1.0x16		15200	80	25	50	800
105x1.2x16	105x1.2x16		15200	80	25	50	800
105x1.6x16	105x1.6x16		15200	80	25	25	800
115x1.0x22.2	115x1.0x22.2		13300	80	25	25	400
115x1.2x22.2	115x1.2x22.2		13300	80	25	25	400
115x1.6x22.2	115x1.6x22.2		13300	80	25	25	400
125x1.0x22.2	125x1.0x22.2		12200	80	25	25	400
125x1.2x22.2	125x1.2x22.2		12200	80	25	25	400
125x1.6x22.2	125x1.6x22.2		12200	80	25	25	400
150x1.6x22.2	150x1.6x22.2		10200	80	25	25	400
180x1.6x22.2	180x1.6x22.2		8500	80	10	20	200
230x1.9x22.2	230x1.9x22.2		6600	80	10	20	100
230x2.0x22.2	230x2.0x22.2		6600	80	10	20	100

LARGE DIAMETER CUTTING WHEEL

Product Advantages

- long durability
- Very sharp
- Cost effective
- Less heat generated
- Less noise
- Easy working

Application

- Solid material
- Rails
- Thin-walled tubes
- Unalloyed and alloyed construction steel
- High alloy special steel
- Angular steel profiles



H10039						
Dimension (D*T*H)	Dimension (D*T*H)	shape	Speed (R.P.M)	Speed (m/s)	PCS/ Shink Wrap	PCS/ Inner box
250x2.5x25.4	10x3/32x1		6150	80	5	25
250x3.0x25.4	10x1/8x1		6150	80	5	25
300x2.5x25.4	12x3/32x1		5100	80	5	25
300x2.5x32	12x3/32x5/4		5100	80	5	25
300x3.0x25.4	12x1/8x1		5100	80	5	25
300x3.0x32	12x1/8x5/4		5100	80	5	25
300x4.0x25.4	12x5/32x1		5100	80	5	25
300x4.0x32	12x5/32x5/4		5100	80	5	25
355x2.5x25.4	14x3/32x1		4400	80	5	25
355x2.5x32	14x3/32x5/4		4400	80	5	25
355x3.0x25.4	14x1/8x1		4400	80	5	25
355x3.0x32	14x1/8x5/4		4400	80	5	25
355x4.0x25.4	14x5/32x1		4400	80	5	25
355x4.0x32	14x5/32x5/4		4400	80	5	25
400x3.0x25.4	16x1/8x1		3800	80	5	25
400x3.0x32	16x1/8x5/4		3800	80	5	25
400x4.0x25.4	16x5/32x1		3800	80	5	25
400x4.0x32	16x5/32x5/4		3800	80	5	25

FLAP WHEELS




Product Advantages

- long durability
- Very sharp
- Cost effective
- Less heat generated
- Less noise


Application

- Solid material
- Tubes
- Unalloyed and alloyed construction steel
- High alloy special steel
- Angular steel profiles

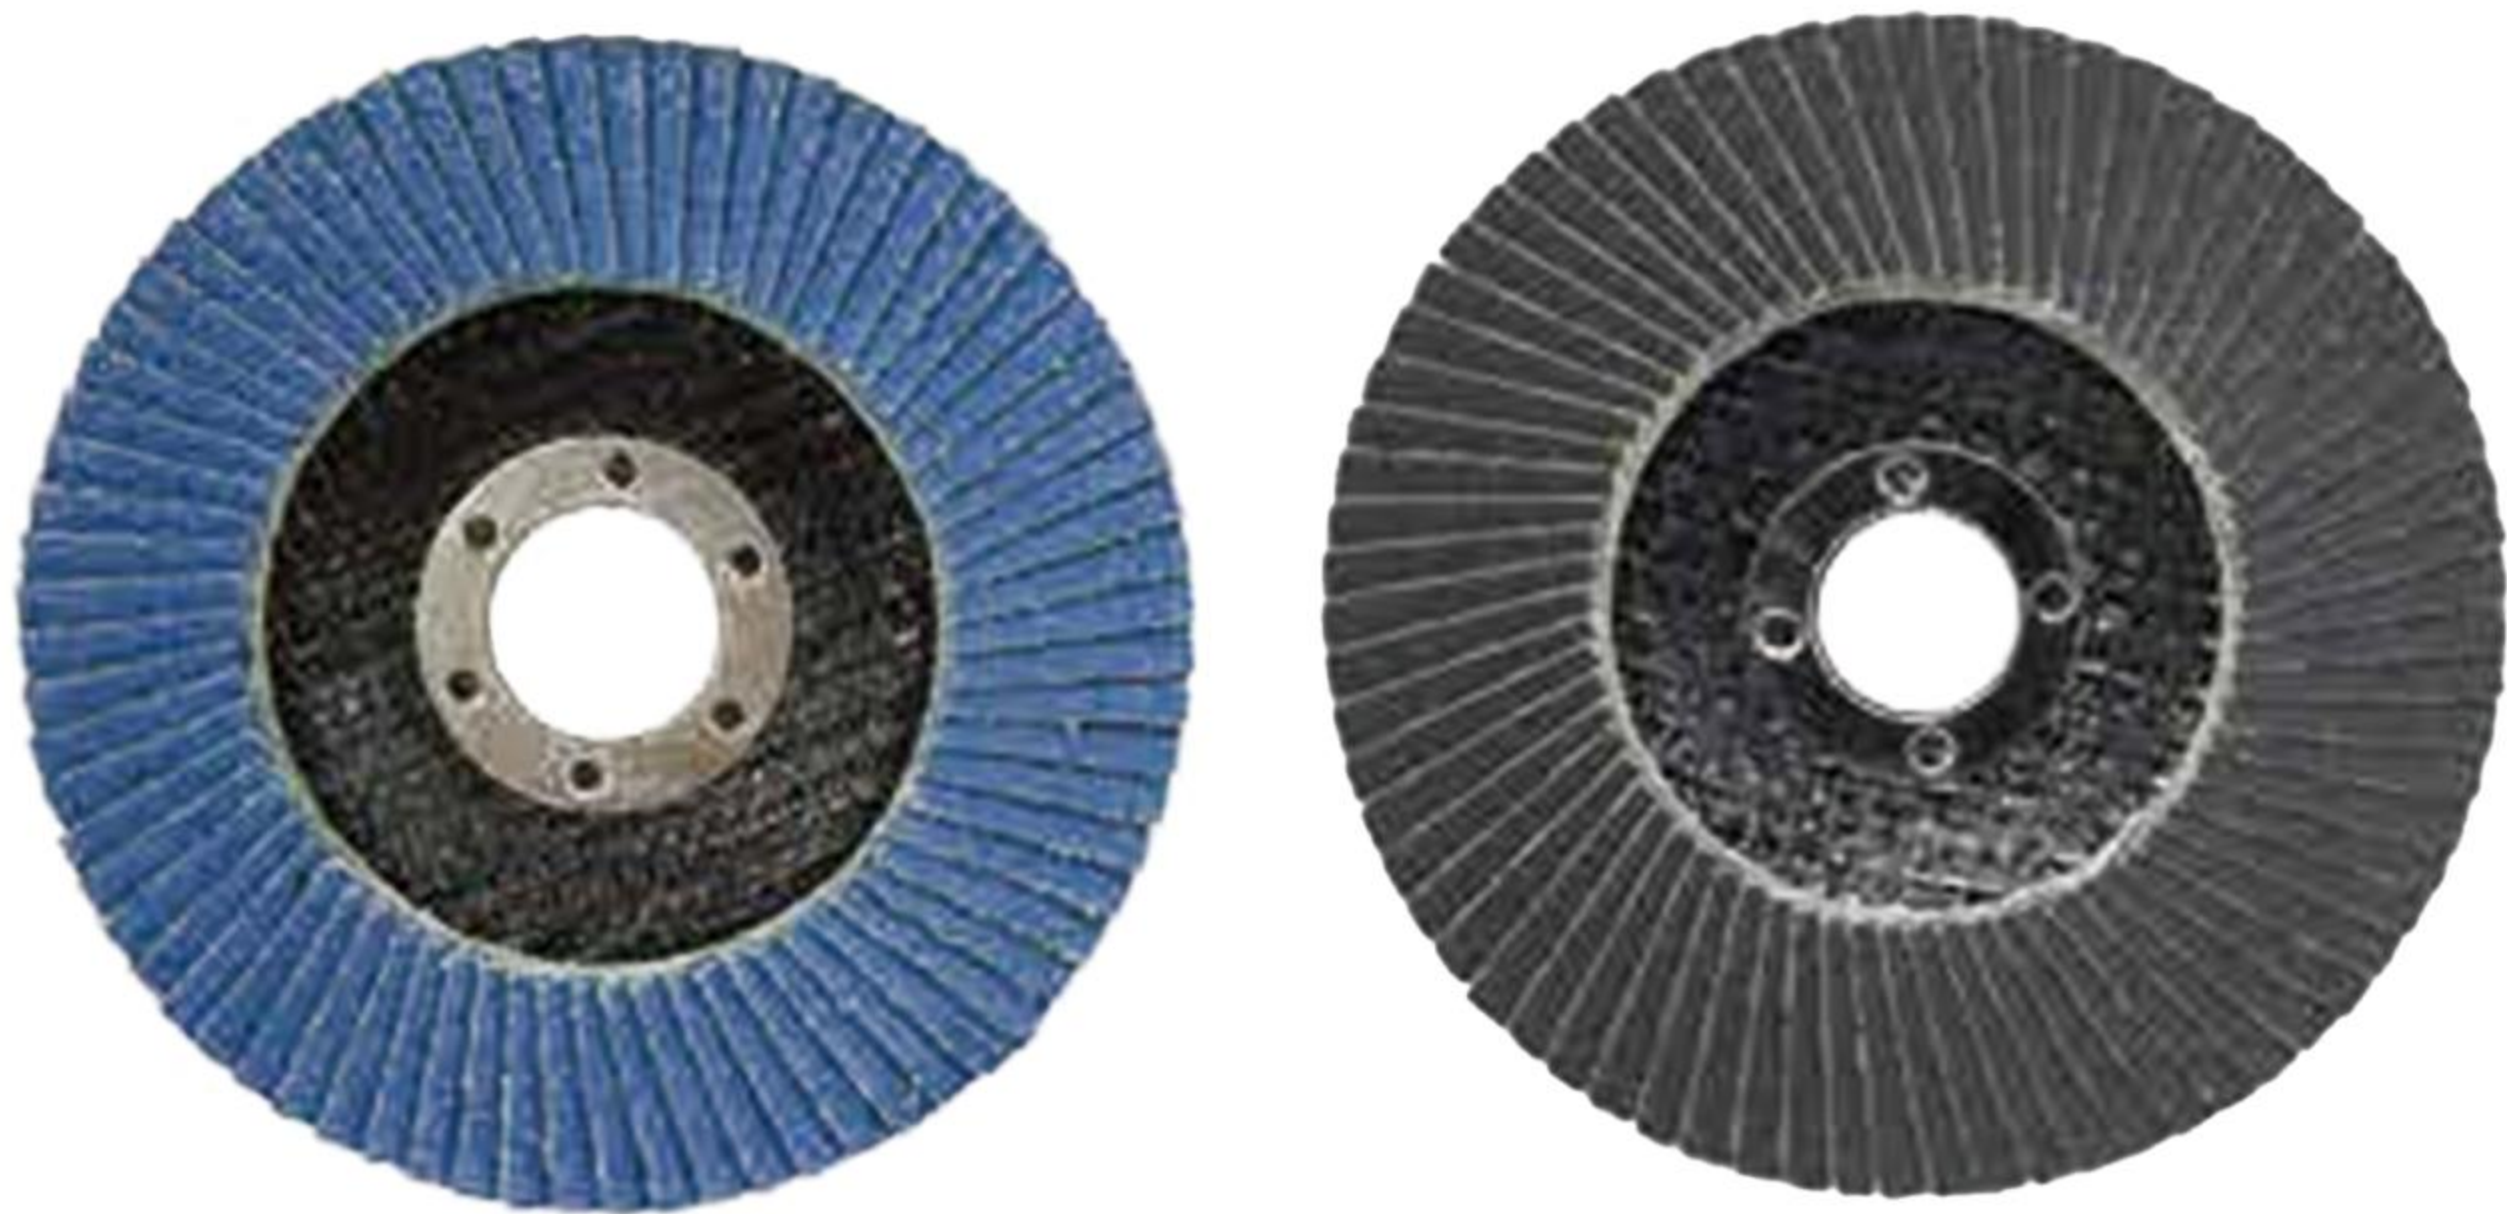

H10040									
Dimension(mm)	Dimension(inch)	Speed(R.P.M)	Speed(m/s)	40	60	80	100	120	PCS/Shrink wrap
100x16	4x5/8	15200	80	✓	✓	✓	✓	✓	5
115x22	4 1/2x7/8	13300	80	✓	✓	✓	✓	✓	5
125x22	5x7/8	12200	80	✓	✓	✓	✓	✓	5
180x22	7x7/8	8500	80	✓	✓	✓	✓	✓	5
PCS/Inner box									
/									
PCS/Shippinf carton									
200									
200									
100									

PRODUCT DETAILS MAP

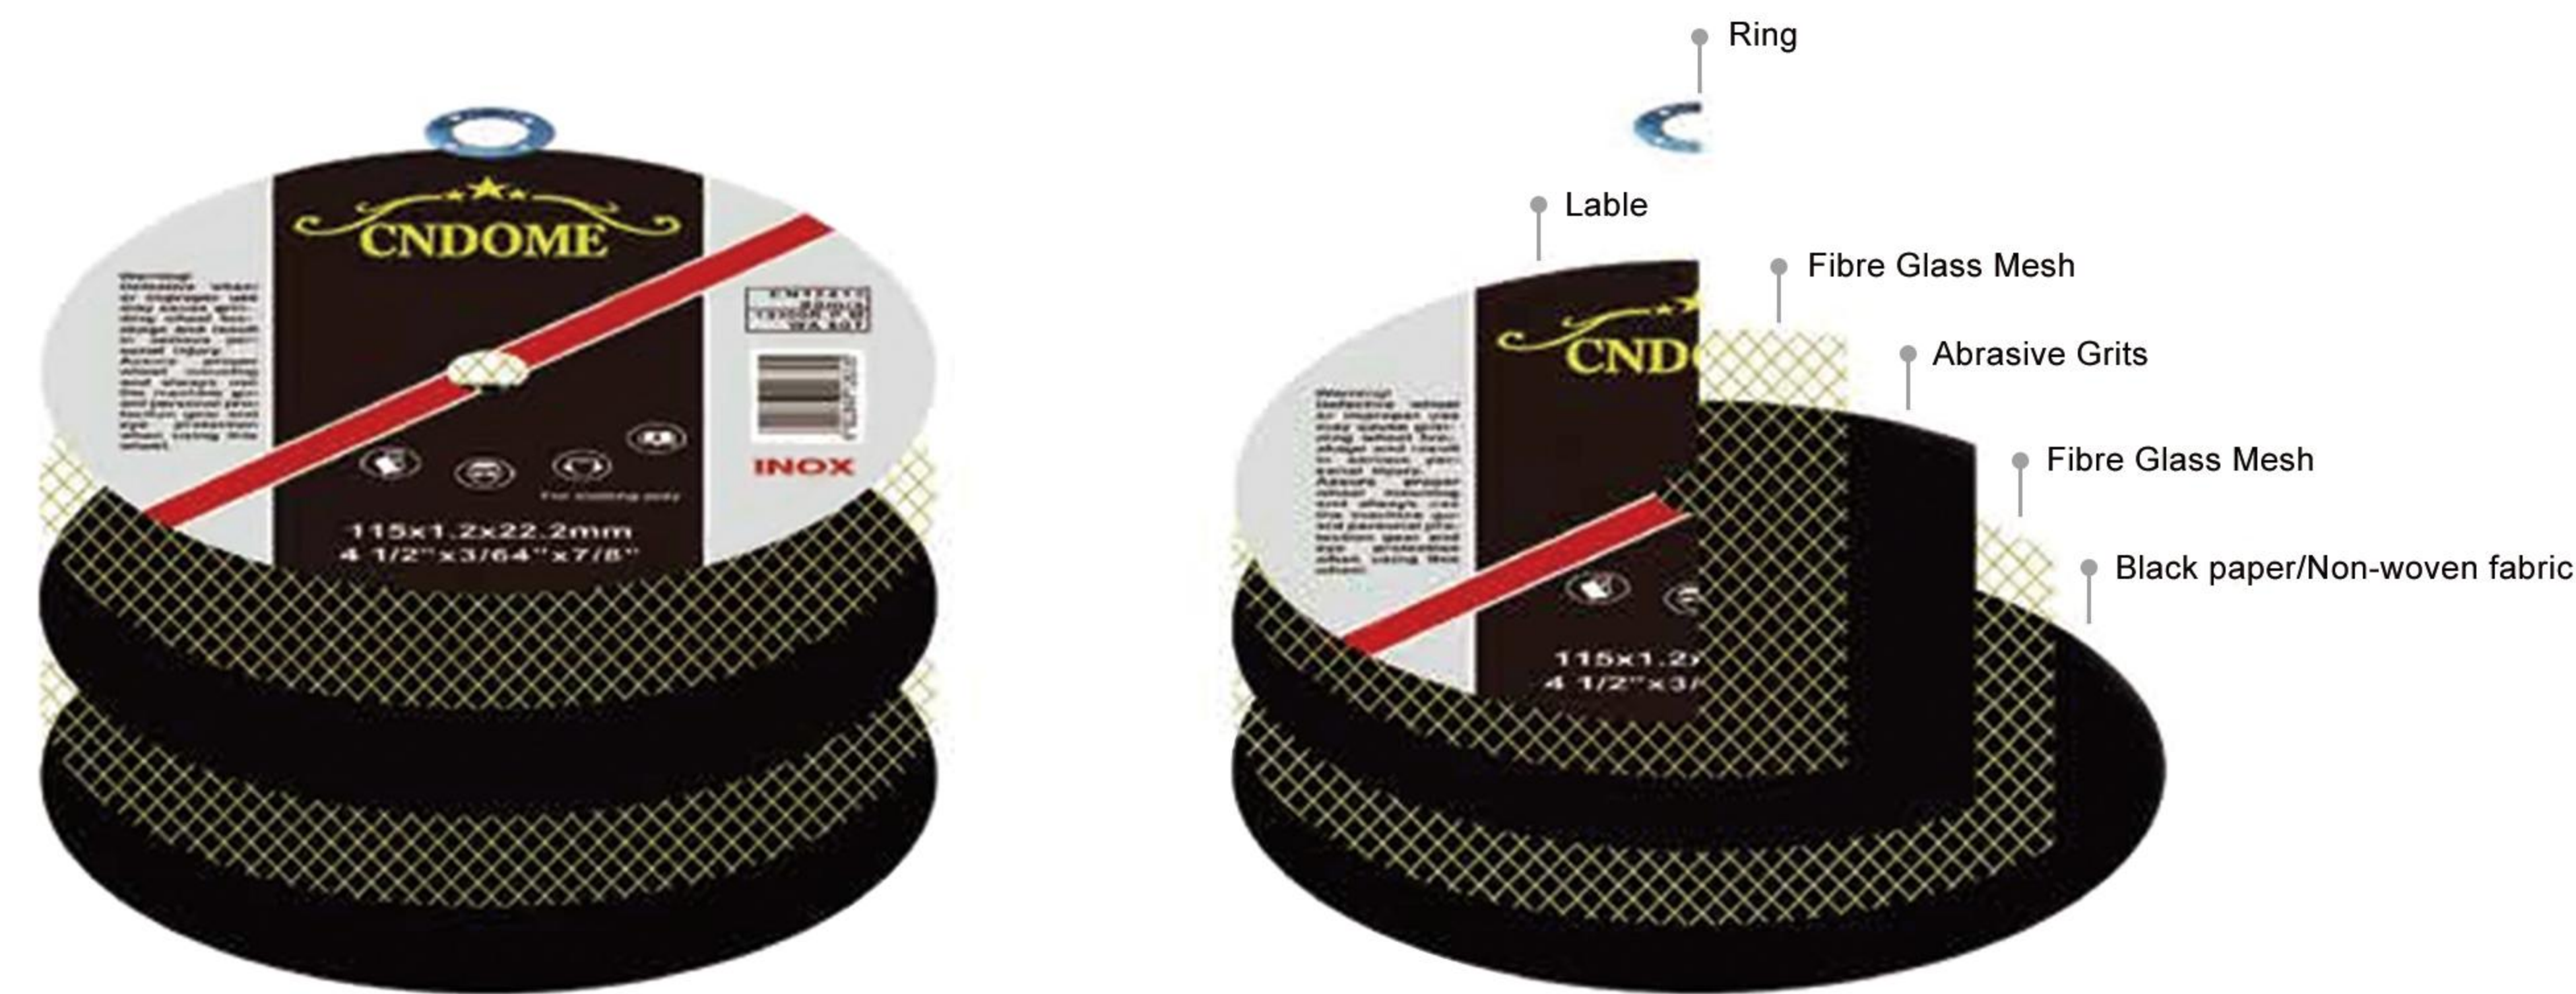

A Brown Aluminum Oxide
Ideal for grinding high strength metal, such as carbon steel, annealed malleable iron and hard bronze etc.



SA Single crystal Alumina
Ideal for grinding high strength metal, such as carbon steel, annealed malleable iron and hard bronze etc.



C Black silicon Carbide
Ideal for grinding iron, brass, rubber, plastic, wood, stone and concrete etc.



WA White Aluminium Oxide
Ideal for grinding hardened steels, alloy steels, stainless steel and high carbon steels etc.

GROUND DRILL BIT



H10041			
Material	carbon steel	carbon steel	carbon steel
Carton Size	80x300mm	80*250mm	40*220mm